FIX TRADING COMMUNITY™
INDUSTRY-DRIVEN • INDEPENDENT • NEUTRAL

FIX Session Layer
Technical Specification

Technical Standard – June 2020

THIS DOCUMENT IS THE FINAL VERSION OF A FIX TECHNICAL STANDARD. THIS VERSION HAS BEEN APPROVED BY THE GLOBAL TECHNICAL COMMITTEE AS THE FINAL STEP IN CREATING A NEW FIX TECHNICAL STANDARD OR A NEW VERSION OF AN EXISTING FIX TECHNICAL STANDARD. POTENTIAL ADOPTERS ARE STRONGLY ENCOURAGED TO USE ONLY THE FINAL VERSION. EXISTING ADOPTERS ARE STRONGLY ENCOURAGED TO UPGRADE TO THE FINAL VERSION.

© Copyright, 2011-2020, FIX Protocol, Limited

Table of Contents

1 Scope 7

2 Normative references 8

3 Terms and definitions 9

3.1 General terms and definitions 9
3.1.1 session layer message 9
3.1.2 application message 9
3.1.3 message type 9
3.1.4 valid FIX message 9
3.1.5 FIX session processor 9
3.1.6 initiator 9
3.1.7 acceptor 9
3.1.8 rules of engagement 9
3.1.9 peer 9
3.1.10 counterparty 9
3.1.11 NextNumIn 9
3.1.12 NextNumOut 10
3.1.13 retransmission 10
3.1.14 resend 10
3.1.15 gap fill 10
3.1.16 application version 10
3.1.17 extension pack 10
3.1.18 session profile 10
3.1.19 CompID 10
3.1.20 SubID 10
3.1.21 LocationID 10
3.1.22 transport layer connection 10
3.1.23 in-band communication 11
3.1.24 out-of-band communication 11
3.1.25 TestRequestThreshold 11
3.1.26 SendingTimeThreshold 11
3.1.27 LogoutAckThreshold 11

4 FIX session 12

4.1 Sequence numbers 12

4.2 Identifying the FIX session 13
4.2.1 The FIX session profile 13
4.2.2 Identification of FIX session peers 13
4.2.3 Validation of SendingTime(52) 14
4.2.4 Additional fields available for peer identification 14

4.3 Establishing a FIX connection 14
4.3.1 Transport layer requirements 14
4.3.2 Using the TestMessageIndicator(464) to explicitly identify testing 14
4.3.3 Application layer encryption 15
4.3.4 Heartbeat interval 15
4.3.5 Heartbeat interval determination 15
4.3.5.1 Acceptor requires a specific heartbeat interval 15
4.3.5.2 Acceptor requires initiator specify a value within a heartbeat interval range 15
4.3.5.3 Acceptor accepts the initiator specified heartbeat interval 16
4.3.6 Maximum message size 16
4.3.7 Specifying application version 16
4.3.8 Specifying supported message types 16
4.3.9 Identification of application system and FIX session processor 16
4.3.10 Responding to a request to establish a FIX session 16

© Copyright, 2011-2020, FIX Protocol, Limited

4.3.11 Initial synchronization of messages in a FIX connection 19
4.3.12 Synchronization after successful logon 19

4.4 Extended features for FIX session and FIX connection initiation 23
4.4.1 Using NextExpectedMsgSeqNum(789) to synchronize a FIX session 23
4.4.2 Using ResetSeqNumFlag(141) to reset FIX session for 24 hour connectivity 25
4.4.3 Using ResetSeqNumFlag(141) to reset FIX session during FIX connection establishment 25
4.4.4 Using initiator state to restore acceptor session state 25

4.5 Message exchange during a FIX connection 26
4.5.1 FIX connection keep alive (heartbeat) 26
4.5.2 Garbled message processing 26
4.5.3 Missing sequence number 27
4.5.4 Rejecting invalid messages 27
4.5.5 Test Request Processing 28

4.6 FIX connection termination 29
4.6.1 Normal logout processing 30
4.6.2 Logout without acknowledgement from peer 31
4.6.3 Logout with retransmission of missed messages 32
4.6.4 When to terminate a FIX connection by terminating the transport layer connection instead of sending a Logout(35=5) 32

4.7 Extended features for FIX connection Termination 33
4.7.1 Using NextExpectedMsgSeqNum(789) when terminating FIX connection due to invalid MsgSeqNum(34) 33

4.8 Message recovery 33
4.8.1 Ordered message processing 33
4.8.2 Request retransmission of messages 34
4.8.3 Responding to a ResendRequest(35=2) message 36
4.8.4 Possible duplicates 36
4.8.5 Gap fill process 37
4.8.5.1 Example using SequenceReset(35=4) to gap fill over multiple messages 37
4.8.6 Sequence reset 38
4.8.7 Processing inbound possible duplicate messages (PossDup(43) set to “Y”) 39
4.8.8 Processing gaps when receiving FIX session layer messages 39

4.9 Resending an unacknowledged application message 40
4.9.1 The difference between application layer resend and session layer retransmission 41

4.10 FIX session state matrix 42
4.10.1 FIX logon process state transition diagram 44
4.10.2 FIX logout process state transition diagram 45

5 FIX session profiles 47

5.1 FIX.4.2 session profile 47
5.1.1 Profile identification 47
5.1.2 Application version identification 47

5.2 FIX4 session profile 47
5.2.1 Profile identification 47
5.2.2 Application version identification 47

5.3 FIXT session profile 48
5.3.1 Profile identification 48
5.3.2 Multiple application version support over a single FIXT session 48
5.3.3 Session default application version identification 48
5.3.4 Message type default application version 48
5.3.5 Explicit application version per message 48
5.3.6 Use of extension packs 49
5.3.7 Use of a custom application version 49

© Copyright, 2011-2020, FIX Protocol, Limited

5.4 Lightweight FIXT (LFIXT session profile) 50
5.4.1 Profile identification 50
5.4.2 Application version identification 50
5.4.3 LFIXT transport layer requirements 50
5.4.4 LFIXT compatible mode 50
5.4.5 LFIXT succinct mode 51
5.4.6 LFIXT and FIXT operating mode interoperability 52
5.4.7 Validation of message sequence numbers 52
5.4.8 Application layer recovery 52
5.4.9 LFIXT initiator connects to LFIXT acceptor 52
5.4.10 FIXT initiator connects to LFIXT acceptor (compatible mode) 53
5.4.11 Receipt of ResendRequest(35=2) message from a FIXT peer 55
5.4.12 Processing invalid messages 58

6 FIX message routing 59

6.1 Message routing details – one firm-to-one firm (point-to-point) 59

6.2 Message routing details – third party message routing 59

7 Transmitting alternatively encoded messages over a FIX session 61

7.1 Use of Attachment group 61

8 Components 62

8.1 AttachmentGrp 62

8.2 AttachmentKeywordGrp 63

8.3 HopGrp 63

8.4 MsgTypeGrp 63

8.5 StandardHeader 64

8.6 StandardTrailer 65

9 Messages 66

9.1 Heartbeat message 66

9.2 TestRequest message 66

9.3 ResendRequest message 66

9.4 Reject message 66

9.5 SequenceReset message 67

9.6 Logout message 68

9.7 Logon message 68

9.8 XMLnonFIX message 70

10 Fields 71

11 Code sets 78

11.1 ApplLevelRecoveryIndicatorCodeSet 78

11.2 ApplVerIDCodeSet 78

11.3 AttachmentEncodingTypeCodeSet 78

11.4 EncryptMethodCodeSet 79

11.5 GapFillFlagCodeSet 79

11.6 MsgDirectionCodeSet 79

11.7 MsgTypeCodeSet 79

© Copyright, 2011-2020, FIX Protocol, Limited

11.8 PossDupFlagCodeSet 80
11.9 PossResendCodeSet 80
11.10 ResetSeqNumFlagCodeSet 80
11.11 SessionRejectReasonCodeSet 80
11.12 SessionStatusCodeSet 81
11.13 TestMessageIndicatorCodeSet 82
Bibliography **83**

© Copyright, 2011-2020, FIX Protocol, Limited

DISCLAIMER

THE INFORMATION CONTAINED HEREIN AND THE FINANCIAL INFORMATION EXCHANGE PROTOCOL (COLLECTIVELY, THE "FIX PROTOCOL") ARE PROVIDED "AS IS" AND NO PERSON OR ENTITY ASSOCIATED WITH THE FIX PROTOCOL MAKES ANY REPRESENTATION OR WARRANTY, EXPRESS OR IMPLIED, AS TO THE FIX PROTOCOL (OR THE RESULTS TO BE OBTAINED BY THE USE THEREOF) OR ANY OTHER MATTER AND EACH SUCH PERSON AND ENTITY SPECIFICALLY DISCLAIMS ANY WARRANTY OF ORIGINALITY, ACCURACY, COMPLETENESS, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SUCH PERSONS AND ENTITIES DO NOT WARRANT THAT THE FIX PROTOCOL WILL CONFORM TO ANY DESCRIPTION THEREOF OR BE FREE OF ERRORS. THE ENTIRE RISK OF ANY USE OF THE FIX PROTOCOL IS ASSUMED BY THE USER.

NO PERSON OR ENTITY ASSOCIATED WITH THE FIX PROTOCOL SHALL HAVE ANY LIABILITY FOR DAMAGES OF ANY KIND ARISING IN ANY MANNER OUT OF OR IN CONNECTION WITH ANY USER'S USE OF (OR ANY INABILITY TO USE) THE FIX PROTOCOL, WHETHER DIRECT, INDIRECT, INCIDENTAL, SPECIAL OR CONSEQUENTIAL (INCLUDING, WITHOUT LIMITATION, LOSS OF DATA, LOSS OF USE, CLAIMS OF THIRD PARTIES OR LOST PROFITS OR REVENUES OR OTHER ECONOMIC LOSS), WHETHER IN TORT (INCLUDING NEGLIGENCE AND STRICT LIABILITY), CONTRACT OR OTHERWISE, WHETHER OR NOT ANY SUCH PERSON OR ENTITY HAS BEEN ADVISED OF, OR OTHERWISE MIGHT HAVE ANTICIPATED THE POSSIBILITY OF, SUCH DAMAGES.

DRAFT OR NOT RATIFIED PROPOSALS (REFER TO PROPOSAL STATUS AND/OR SUBMISSION STATUS ON COVER PAGE) ARE PROVIDED "AS IS" TO INTERESTED PARTIES FOR DISCUSSION ONLY. PARTIES THAT CHOOSE TO IMPLEMENT THIS DRAFT PROPOSAL DO SO AT THEIR OWN RISK. IT IS A DRAFT DOCUMENT AND MAY BE UPDATED, REPLACED, OR MADE OBSOLETE BY OTHER DOCUMENTS AT ANY TIME. THE FIX GLOBAL TECHNICAL COMMITTEE WILL NOT ALLOW EARLY IMPLEMENTATION TO CONSTRAIN ITS ABILITY TO MAKE CHANGES TO THIS SPECIFICATION PRIOR TO FINAL RELEASE. IT IS INAPPROPRIATE TO USE FIX WORKING DRAFTS AS REFERENCE MATERIAL OR TO CITE THEM AS OTHER THAN "WORKS IN PROGRESS". THE FIX GLOBAL TECHNICAL COMMITTEE WILL ISSUE, UPON COMPLETION OF REVIEW AND RATIFICATION, AN OFFICIAL STATUS ("APPROVED") OF/FOR THE PROPOSAL AND A RELEASE NUMBER.

No proprietary or ownership interest of any kind is granted with respect to the FIX Protocol (or any rights therein), except as expressly set out in FIX Protocol Limited's Copyright and Acceptable Use Policy.

© Copyright 2003-2020 FIX Protocol Limited, all rights reserved

FIX Technical Standard Specifications by FIX Protocol Ltd. are licensed under a Creative Commons Attribution-NoDerivatives 4.0 International License. Based on a work at https://github.com/FIXTradingCommunity/.

1 Scope

The Financial Information eXchange session layer is used to provide reliable and recoverable messaging for electronic trading. The protocol is intended for use by asset managers, trading firms, brokerages, trading venues, clearing houses, custodians, depositories, asset servicers, among others involved in the trading life cycle activities of a wide range of financial instruments. The FIX session layer functionality is a realization of the ISO/IEC 7498-1:1994 Open System Interconnection basic reference model level 5 session layer.

© Copyright, 2011-2020, FIX Protocol, Limited

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

— IETF RFC 2119 – *Key words for use in RFCs to Indicate Requirement Levels* March 1997

— Financial Information eXchange – FIX TagValue Encoding Technical Specification

— FIXS Technical Specification – Draft Standard https://www.fixtrading.org/standards/fixs/

— EP113 CME Trading System Identification https://www.fixtrading.org/packages/ep113/

— EP124 NGM Logon Extension https://www.fixtrading.org/packages/ep124/

— EP167 AttachmentGrp Proposal https://www.fixtrading.org/packages/ep167/

© Copyright, 2011-2020, FIX Protocol, Limited

3 Terms and definitions

3.1 General terms and definitions

3.1.1 session layer message

A message carried over the FIX session that is integral to the operation of the FIX session.

3.1.2 application message

A message that is carried over a FIX session to accomplish some business purpose, such as an order to buy or sell a financial instrument, reporting market data, reporting an execution of a trade.

3.1.3 message type

An identifier (code) that defines the type of message being sent. The message type for the FIX session is a case sensitive string encoded in the MsgType(35) field.

3.1.4 valid FIX message

A session or application message that is a tagvalue encoded string of octets that is properly formed according to the FIX tagvalue encoding specification.

3.1.5 FIX session processor

A combination of computer hardware, firmware, and software that implements the FIX session layer. Commonly referred to as a FIX Engine.

3.1.6 initiator

The FIX session processor that establishes the transport layer connection and initiates the session via transmission of the initial Logon(35=A) message.

3.1.7 acceptor

The FIX session processor that is able to establish a transport layer connection and receive Logon(35=A) requests from FIX session initiators to start or resume a FIX session.

3.1.8 rules of engagement

A specification, usually provided in document form, that describes a specific use of FIX. Often referred to as a FIX service offering. FIX Orchestra is a standard that may be used to specify a machine readable rules of engagement.

3.1.9 peer

A peer is one of the FIX session processors being communicated with over a FIX session. The peer of the initiator is the acceptor. The peer of the acceptor is the initiator. The initiator and acceptor are peers.

3.1.10 counterparty

The firms or legal entities or individuals agreeing to use the FIX session layer to conduct some form of business endeavor.

3.1.11 NextNumIn

Each FIX session processor must keep track of the next message sequence number it is expecting to receive from its peer to guarantee ordered delivery of messages over the life of a FIX session that may span multiple FIX connections. The next expected incoming sequence number (NextNumIn) is compared to the value in the MsgSeqNum(34) field in each message received from the peer.

© Copyright, 2011-2020, FIX Protocol, Limited

3.1.12 NextNumOut

Each FIX session processor must keep track of the next outbound sequence number (NextNumOut) it will send to its peer over a FIX connection.

3.1.13 retransmission

To retransmit a message that was previously sent in order to resynchronize the FIX session. A retransmitted message uses the original MsgSeqNum(34) value with PossDupFlag(43)=Y.

3.1.14 resend

The process of an application layer resending an application message because it has not received an application layer acknowledgement for the message. A resend may only be initiated by the application layer, not the session layer. The determination if the message was previously received is the responsibility of the application layer, not the session layer.

3.1.15 gap fill

The process to resolve gaps in message sequence numbers within a FIX session.

3.1.16 application version

The FIX session layer provides fields to communicate versions of the application layer messages. The FIX Trading Community defines standard application versions.

3.1.17 extension pack

An extension pack is an approved addition to the FIX standard. The granularity of an extension pack may vary widely from a single enumeration value addition to the definition of entire new categories of messages. Extension packs are identified by a sequential integer number and must be applied in order. An Extension pack is considered available for use if it has been approved and published by the FIX Global Technical Committee. Extension packs are created on an as needed basis and are generally driven by community requests. An extension pack is cumulative, in that the artefacts (Orchestra file, FIXimate) include all previous extension packs. When an extension pack is published, it becomes the *FIX Latest* version of FIX.

3.1.18 session profile

Session profiles are extensions or restrictions on the use of the standard session layer messages that can be used to represent context of usage. FIX4, FIXT, and LFIXT are the current FIX session profiles.

3.1.19 CompID

An alphanumeric identifier for the entity associated with a FIX session. As this is likely a financial markets participant company, the name was viewed colloquially as a company identifier abbreviated as a *CompID*.

3.1.20 SubID

A subidentifier optionally available to identify a subentity within a CompID. The SubID may be used to identify a specific trader or a subunit of a business entity. The use of SubIDs is at the discretion of the counterparties. Certain regulatory regimes globally require the use of SubID to identify specific traders.

3.1.21 LocationID

A location identifier providing additional location information either geographical or within a trading desk on a trading floor. The use of LocationIDs is at the discretion of the counterparties.

3.1.22 transport layer connection

A FIX session relies on a transport layer to provide for ordered delivery of messages and message recovery during the life of the transport layer connection. The FIX session does not require a specific transport layer, although TCP/IP is widely used and is a de facto standard transport layer for FIX sessions. TCP/IP provides an ordered reliable delivery of

© Copyright, 2011-2020, FIX Protocol, Limited

a stream of bytes during the life of the TCP connection. The FIX session processor reads this stream identifying FIX message boundaries.

3.1.23 in-band communication

Transmitting control information or metadata about the application layer or session layer in application and session FIX message types over the FIX session. Sending the HeartBtInt(108) field in the Logon(35=A) message is an example of in-band transmission of control information. Providing version information about a FIX service in the CstmApplVerID(1129) on the Logon(35=A) message is another example.

3.1.24 out-of-band communication

Exchanging control information or metadata about a FIX session via a separate communication mechanism than the FIX session. Providing the TestRequestThreshold in a rules of engagement document is an example of exchanging information out-of-band. Providing version information about a FIX service on a website or in a rules of engagement document is another example of out-of-band communication. Providing access to a specification online via a website or web service would be another example of out-of-band communication. Even though this is electronic communication, it is not being done over the FIX session to which that information applies.

3.1.25 TestRequestThreshold

The amount of time expressed as a multiplier of the heart beat interval before a TestRequest(35=1) message is sent to the peer when the heartbeat interval has been exceeded without receiving a message from the peer. This value may be specified out-of-band in a rules of engagement.

3.1.26 SendingTimeThreshold

The amount of time expressed in seconds in which the SendingTime(52) value in an inbound message differs from the system time available to the receiving FIX session processor. This value may be specified out-of-band in a rules of engagement.

3.1.27 LogoutAckThreshold

The amount of time expressed in seconds that a FIX session processor that has transmitted a Logout(35=5) request will wait for the Logout(35=5) acknowledgement before terminating the transport layer connection. This value may be specified out-of-band in a rules of engagement.

© Copyright, 2011-2020, FIX Protocol, Limited

4 FIX session

A **FIX session** is a bidirectional stream of ordered messages between two peers within a continuous sequence number series beginning with 1. A single FIX session can exist across multiple sequential (not concurrent) FIX connections, which means that peers may intentionally or unintentionally connect and disconnect multiple times while maintaining a single FIX session. The FIX session can be thought of as a bi-directional durable session sharing characteristics of the guaranteed delivery and durable subscriber enterprise integration architecture patterns.

A **FIX connection** consists of three parts: logon process, message exchange (inclusive of resynchronization of state), and possible logout process over a transport layer connection. A FIX connection may be concluded by the unrecoverable loss of the transport layer, a system failure, or an application failure.

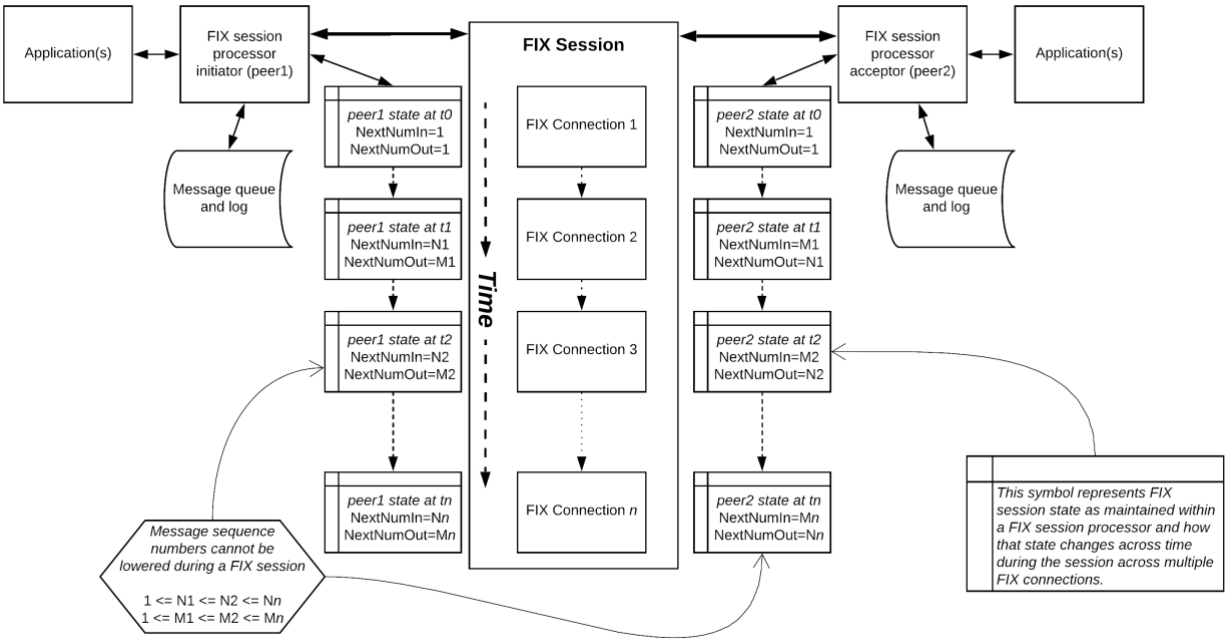

Figure 1 — Conceptual view of FIX session layer

Connecting parties shall bilaterally agree upon the time the FIX session is started and the duration of a FIX session.[1] A FIX session is often configured to correspond to a certain period of time, such as a trading day, calendar day, or a trading session. A FIX session may extend beyond multiple periods by counterparty agreement.

The FIX session is based on an optimistic model. Normal delivery of data is assumed (i.e. no session layer acknowledgement of individual messages) with errors in delivery identified by message sequence number gaps.

4.1 Sequence numbers

All messages sent over a FIX session shall be identified by a unique sequence number in the MsgSeqNum(34) field.

A FIX session shall start with a next expected outgoing sequence number (NextNumOut) of 1 and a next expected incoming sequence number (NextNumIn) of 1.

A FIX session processor must maintain the NextNumOut and NextNumIn for the entire FIX session.

A FIX session processor shall persist the NextNumOut and NextNumIn in order to support FIX session recovery across multiple FIX connections.

Resetting NextNumOut to 1 and NextNumIn to 1, for whatever reason, shall constitute the beginning of a new FIX session.

[1] Firms may document the session layer configuration using the FIX Orchestra interface specification.

© Copyright, 2011-2020, FIX Protocol, Limited

FIX session layer and application layer messages shall share the same sequence number space.

Each FIX session layer and application layer message sent consumes the next outbound sequence number, incrementing NextNumOut by 1.

Each FIX session layer and application layer message received consumes the next inbound sequence number, incrementing NextNumIn by 1.

A FIX session must always have peer1.NextNumIn <= peer2.NextNumOut and peer2.NextNumIn <= peer1.NextNumOut to be considered in a valid and recoverable state.

4.2 Identifying the FIX session

A FIX session is identified by the unique combination of BeginString(8) + initiator CompID + acceptor CompID.

4.2.1 The FIX session profile

BeginString(8) shall be used to identify the FIX session profile or version of FIX.

These FIX session profiles are defined within this specification.

Table 1 — The FIX session profiles

FIX session profile	BeginString(8)	Description
FIX.4.2	FIX.4.2	The FIX session profile for use with the FIX.4.2 application layer.
FIX4	FIX.4.4	The FIX session profile backward compatible with FIX.4.4 recommended when counterparties will only be using a single application version during the FIX session, such as *FIX Latest*.
FIXT	FIXT.1.1	The FIX session profile that must be used when mixing multiple application versions over the same FIX session. May be used with a single application version of FIX such as *FIX Latest*.
LFIXT	FIXT.1.1	Lightweight FIXT restricted session layer message recovery[2] to simplify the protocol while maintaining compatibility with FIXT when using LFIXT compatible model of operation.

FIX session acceptor may be configured to support multiple FIX session profiles (or *FIX versions* prior to FIX.4.4) over the same transport layer with only one FIX session profile (or *FIX version* prior to FIX.4.4) being used per FIX session.

The FIX session acceptor should use the incoming Logon(35=A) request BeginString(8) to identify the FIX session profile or FIX version being requested by the initiator.

4.2.2 Identification of FIX session peers

FIX relies on alphanumeric strings known as CompIDs to identify the initiator and the acceptor of FIX messages.

Counterparties must agree to their respective CompID values, which act as an identifier for the peer.

Each message sent over a FIX session layer must contain the sending entity in SenderCompID(49) and the receiving (destination) entity in TargetCompID(56). This requirement applies to both session layer and application layer messages.

FIX service processors must validate the SenderCompID(49) and TargetCompID(56) of each message and ensure that it is identical to the values present in the FIX connection Logon(35=A) message. A discrepancy in the SenderCompID(49)+TargetCompID(56) pair should result in the termination of the FIX connection by sending a Logout(35=A) message using the Text(58) field to indicate the error, followed by termination of the transport layer connection.

[2] The LFIXT session profile uses the same BeginString(8) value as the FIXT session profile. The use of LFIXT and its mode of operation must be agreed upon out-of-band by counterparty agreement.

© Copyright, 2011-2020, FIX Protocol, Limited

4.2.3 Validation of SendingTime(52)

SendingTime(52) must be set to the time the message is transmitted by the FIX session processor, not the time the message was queued for transmission.

SendingTime(52) must be in UTC (Universal Time Coordinated).

SendingTime(52) should be within the reasonable time of a synchronized time source of the receiving FIX session processor. This *SendingTimeThreshold* is highly dependent upon the type of application using the FIX session layer. The *SendingTimeThreshold* may be as low as seconds for high volume, low latency applications up to several minutes for certain order routing applications.

The *SendingTimeThreshold* may be defined and communicated to counterparties out-of-band within the rules of engagement.

The receiving peer shall transmit a Reject(35=3) message with SessionRejectReason(373) set to 10 (SendingTime Accuracy Problem) followed by a Logout(35=5) request when the SendingTime(52) is not within a specified tolerance of a synchronized clock.

4.2.4 Additional fields available for peer identification

The FIX session layer provides additional fields which may be used to further identify recipients within the respective counterparties.

Each counterparty may provide a subidentifier (SenderSubID(50) and TargetSubID(57)) known as SubID.

Each counterparty may provide a location identifier (SenderLocationID(142) and TargetLocationID(143)) known as LocationID.

The SubID and LocationID may vary across messages across the same FIX session.

The counterparties must agree upon the context and semantics of the SubID and LocationID if used.

4.3 Establishing a FIX connection

Establishing a FIX connection involves three distinct operations: creation of a transport layer connection, acceptance with optional authentication of the initiator by the acceptor and message synchronization (initialization).

The initiator shall establish a transport layer connection with the acceptor to establish a FIX connection.

4.3.1 Transport layer requirements

FIX session layer requires that the transport layer provides ordered and lossless message delivery and full duplex operation for the life of the transport layer connection.

FIX implementations that use the TCP/IP protocol as the transport layer must use the FIX-over-TLS (FIXS) specification which specifies the use of Transport Layer Security (TLS) with the FIX session layer to provide transport layer encryption.

The initiator shall send a Logon(35=A) request message to initiate a FIX connection.

The Logon(35=A) request message must always be the first message transmitted over a FIX connection. If the acceptor receives anything other than a valid Logon(35=A) request message, an error should be logged and the transport layer connection terminated without Logout(35=5) processing.

4.3.2 Using the TestMessageIndicator(464) to explicitly identify testing

Counterparties should populate the TestMessageIndicator(464) field with “Y” in the Logon(35=A) request and acknowledgement when testing.

FIX counterparties should validate that the TestMessageIndicator(464) field corresponds to the environment.

If the TestMessageIndicator(464) with value “Y” is present in a Logon(35=A) message indicating a test session and the environment is not a test environment, the peer should transmit a Logout(35=5) message with the Text(58) indicating that the TestMessageIndicator(464) was set to “Y” and the environment is a production environment. Certain venues support sending test messages within the production environment. Counterparties should communicate how testing

© Copyright, 2011-2020, FIX Protocol, Limited

is conducted within the production environment to prevent test messages from being accepted as production messages.

If the TestMessageIndicator(464) with value "N" is present in a Logon(35=A) message indicating a production session and the environment is a test environment, the peer should transmit a Logout(35=5) message with the Text(58) indicating that the TestMessageIndicator(464) was set to "N" and the environment is a test environment.

Failure to validate the TestMessageIndicator(464) against the environment may potentially lead to financial losses.

4.3.3 Application layer encryption

The use of application layer message encryption has been discouraged since the FIX.4.3 version of the FIX protocol.

EncyptionMethod(98) must be present in the Logon(35=A) message and set to "0" when application layer encryption is not in use.

Firms may implement application layer encryption by counterparty agreement.

4.3.4 Heartbeat interval

The HeartBtInt(108) field must be present and specify the interval in seconds for generating heartbeat messages during periods of inactivity.

The HeartBtInt(108) field must be present in the Logon(35=A) message.

The HeartBtInt(108) value must be agreed upon by the initiator and the acceptor.

The initiator and acceptor must use the same HeartBtInt(108) value within a FIX connection.

The HeartBtInt(108) value is the maximum time allowed between receipt of messages from the peer.

Each FIX session processor should implement a heartbeat interval timer. The timer should be reset upon receipt of each message from the peer.

4.3.5 Heartbeat interval determination

The acceptor should convey the rules placed on the expected heartbeat interval via out-of-band rules of engagement[3] when such rules are required by the acceptor.

There are three methods for determining the heartbeat interval:

1. Acceptor requires a specific heartbeat interval
2. Acceptor requires initiator to specify a value within a heartbeat interval range
3. Acceptor accepts the initiator specified heartbeat interval

4.3.5.1 Acceptor requires a specific heartbeat interval

The acceptor may refuse to establish a FIX connection if the HeartBtInt(108) value received on the Logon(35=A) message sent by the initiator does not match the heartbeat interval required by the acceptor.

The acceptor must terminate the FIX session using a Logout(35=5) message when the acceptor refuses to establish a FIX connection due to the inbound HeartBtInt(108) value not matching the expected value.

The acceptor should provide the reason for terminating the FIX connection in the Text(58) field of the Logout(35=5) message by setting it to "Invalid HeartBtInt(108), expected value N seconds", where N is the number of seconds expected in the HeartBtInt(108) field on the initiator Logon(35=A) message. N shall be larger than zero.

4.3.5.2 Acceptor requires initiator specify a value within a heartbeat interval range

The acceptor may refuse to establish a FIX connection if the HeartBtInt(108) value received on the Logon(35=A) message sent by the initiator does not fall within a heartbeat interval range required by the acceptor.

The acceptor must terminate the FIX connection using a Logout(35=5) message when the acceptor refuses to establish a FIX session due to the inbound HeartBtInt(108) value not falling within the required heartbeat interval range.

[3] FIX Orchestra may be used to communicate which FIX session profile and which operating mode is being used for a FIX enabled service.

© Copyright, 2011-2020, FIX Protocol, Limited

The acceptor should specify the reason for terminating the connection in the Text(58) field of the Logout(35=5) message by setting it to "Invalid HeartBtInt(108), expected value between N and M seconds", where N and M are the start and end values of the range of the heartbeat interval in seconds permitted by the acceptor. N shall be larger than zero and M shall be larger than N.

4.3.5.3 Acceptor accepts the initiator specified heartbeat interval

The acceptor may accept the heartbeat interval specified by the initiator in the HeartBtInt(108) field of the initiator Logon(35=A) message by echoing back the heartbeat interval of the initiator in the Logon(35=0) acknowledgement.

4.3.6 Maximum message size

The initiator and acceptor may specify the maximum message size supported in the MaxMessageSize(383) field in the Logon(35=A) message.

Either peer may terminate a FIX connection due to inability to process the maximum message size specified by the other peer by sending a Logout(35=5) message.

The peer terminating the FIX connection should specify the reason in the Text(58) field of the Logout(35=5) message by setting it to "MaxMessageSize(383)=*InboundValue* exceeds maximum message size of *maximum message size*".

4.3.7 Specifying application version

Three fields are provided to identify the application version to counterparties in the Logon(35=A) message. The use of these fields varies across FIX session profiles. For instance, these fields are not applicable to the FIX.4.2 session profile as the FIX.4.2 session profile may only be used with the FIX 4.2 application version.

Field	Definition
DefaultApplVerID(1137)	The FIX application version upon which the application layer is derived.
DegaultApplExtID(1407)	An extension pack that is used with the application layer.
DefaultCstmApplVerID(1408)	User defined custom application version information. DefaultCstmAppVerID(1400) may be used to identify the FIX Orchestra machine readable rules of engagement.

4.3.8 Specifying supported message types

The initiator and acceptor may specify the types of FIX messages by using the repeating group MsgTypeGrp in the Logon(35=A) message.

4.3.9 Identification of application system and FIX session processor[4]

By counterparty agreement, peers may identify the application system as well as the FIX session processor ("FIX Engine") in use by their respective name, version, and vendor as part of the Logon(35=A) message in the ApplicationSystemName(1603), ApplicationSystemVersion(1604), ApplicationSystemVendor(1605), FIXEngineName(1600), FIXEngineVersion(1601), and the FIXEngineVendor(1602) fields.

4.3.10 Responding to a request to establish a FIX session

The acceptor should authenticate the identity of the initiator by examining the incoming Logon(35=A) message, referred to as Logon(35=A) request.

The Logon(35=A) message should contain the data necessary to support the authentication method chosen by counterparty agreement.

The following fields are available for exchanging credentials for authentication:

[4] Functionality added by EP113.

© Copyright, 2011-2020, FIX Protocol, Limited

Table 2 — Fields in the Logon(35=A) message used for authentication

Field	Use
Username(553)	Clear text userid
Password(554)	Clear text password - use is not recommended
NewPassword(925)	Clear text new password - use is not recommended
EncryptedPasswordMethod(1400)	Method of encryption used for password field
EncryptedPasswordLen(1401)	Length in octets of EncryptedPassword(1402)
EncryptedPassword(1402)	Encrypted password
EncryptedNewPasswordLen(1403)	Length in octets of EncryptedNewPassword(1403)
EncryptedNewPassword(1404)	Encrypted new password permits changing password during logon
RawDataLength(95)	Length in octects of RawData(96)
RawData(96)	Binary octet stream that can be used for authentication

SessionStatus(1409) may be used by counterparty agreement to communicate session status regarding authentication on both Logon(35=A) and Logout(35=5) messages.[5]

The acceptor shall respond with a Logon(35=A) message to accept the FIX connection initiation when the request is accepted, referred to as the Logon(35=A) acknowledgement.

The session acceptor should send a Logout(35=5) message to reject FIX connection initiation and provide a reason for the rejection in the Text(58) field and then immediately terminate the transport layer connection.

The initiator should not transmit any application message until the the Logon(35=A) acknowledgement has been received from the acceptor (see the next section for further recommendations).

[5] Field added in EP56

© Copyright, 2011-2020, FIX Protocol, Limited

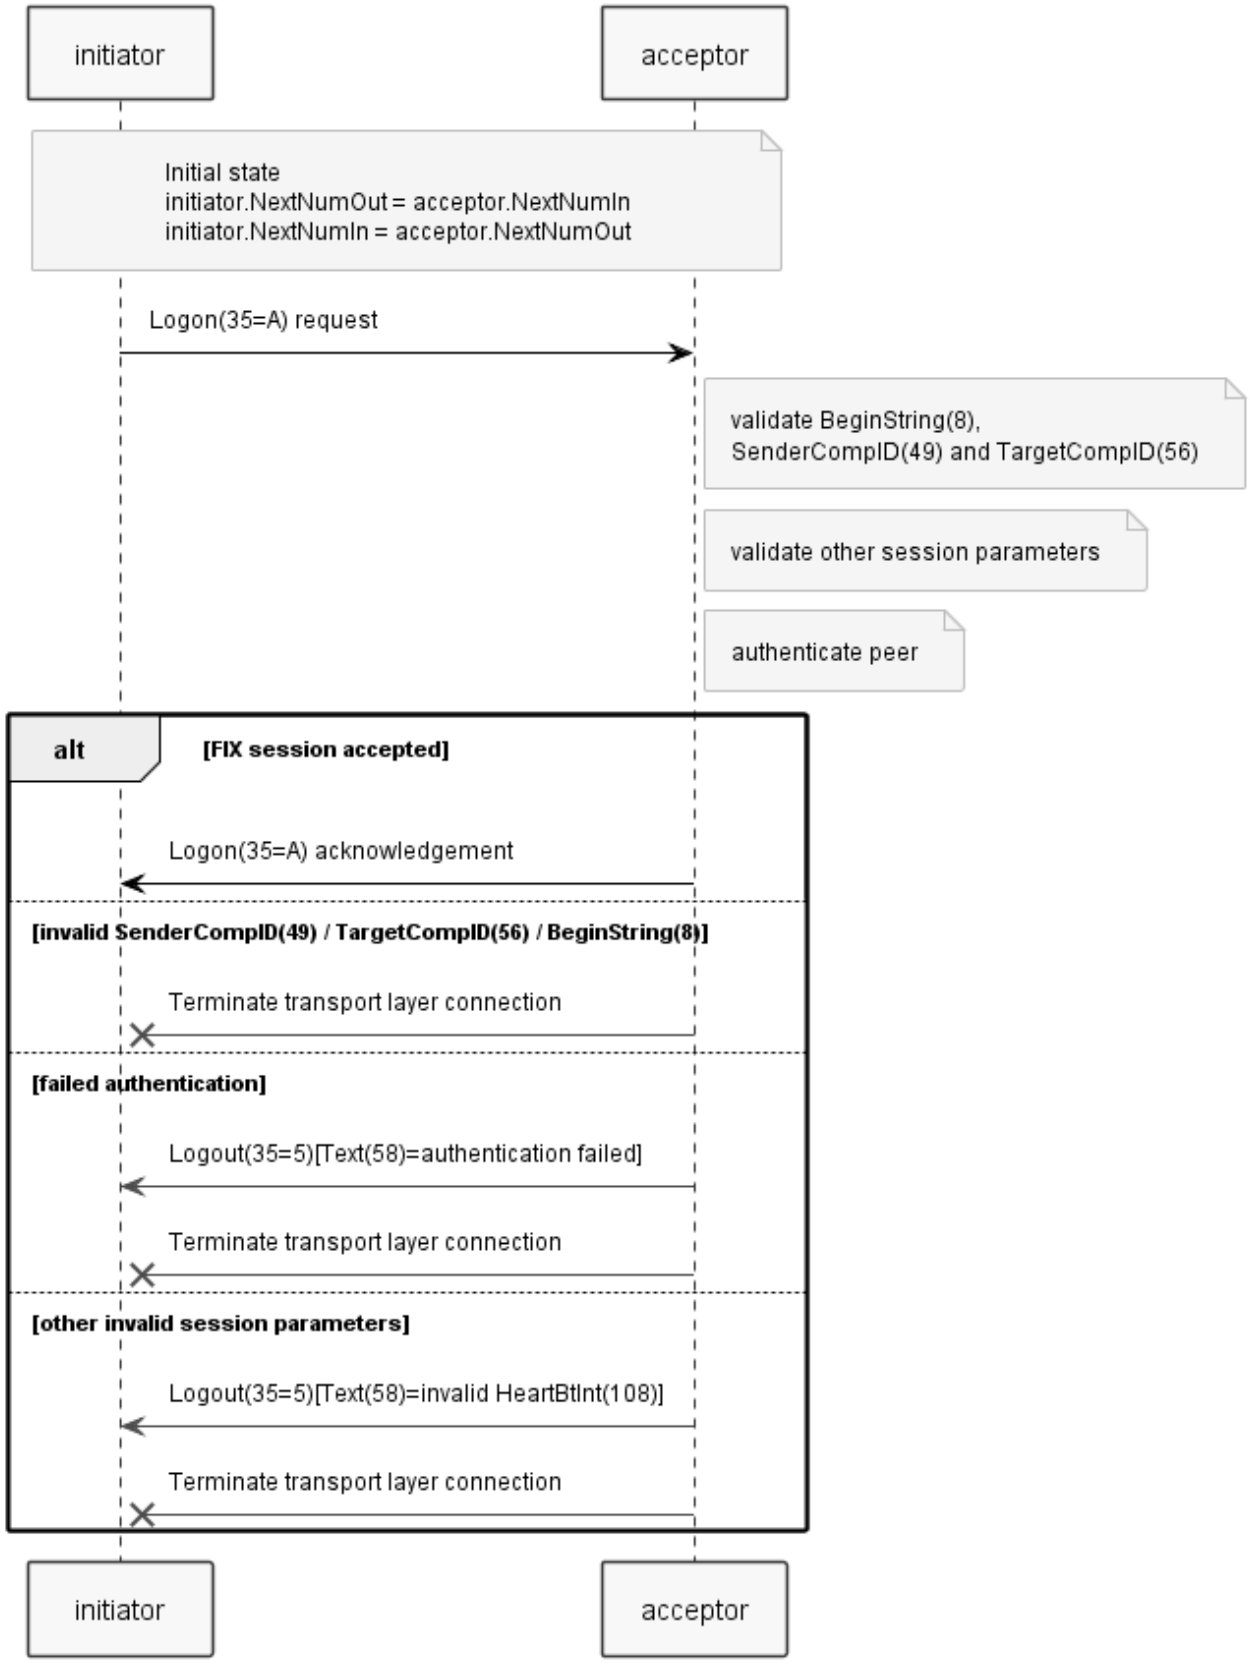

Figure 2 — FIX connection establishment

© Copyright, 2011-2020, FIX Protocol, Limited

4.3.11 Initial synchronization of messages in a FIX connection

The acceptor shall compare MsgSeqNum(34) in the Logon(35=A) request received from the initiator with NextNumIn maintained by the acceptor.

The initiator shall compare MsgSeqNum(34) in the Logon(35=A) acknowledgement received from the acceptor with NextNumIn maintained by the initiator.

If MsgSeqNum(34) is present in the incoming Logon(35=A) message and equal to NextNumIn, then normal processing may commence over the FIX connection.

If MsgSeqNum(34) is present in the incoming Logon(35=A) message and greater than NextNumIn, then message recovery must be performed.

If MsgSeqNum(34) is present in the incoming Logon(35=A) message and is less than NextNumIn, then a Logout(35=5) message should be sent assuming that an error exists in the state of either the initiator or acceptor FIX session processor, followed by a termination of the transport layer connection.

The initiator and acceptor should wait a short period of time following receipt of the Logon(35=A) message from the counterparty before transmitting queued or new application messages to permit both sides to synchronize the FIX session.

Alternatively, the initiator and acceptor may send a TestRequest(35=1) message and wait for the HeartBeat(35=0) message sent in response to the TestRequest(35=1) message, before sending queued or new messages, as this practice forces both sides to perform message synchronization.

4.3.12 Synchronization after successful logon

The following sequence diagrams show three scenarios.

1. acceptor requires retransmission of messages from initiator
2. initiator requires retransmission of messages from acceptor
3. both acceptor and initiator require retransmission of messages

© Copyright, 2011-2020, FIX Protocol, Limited

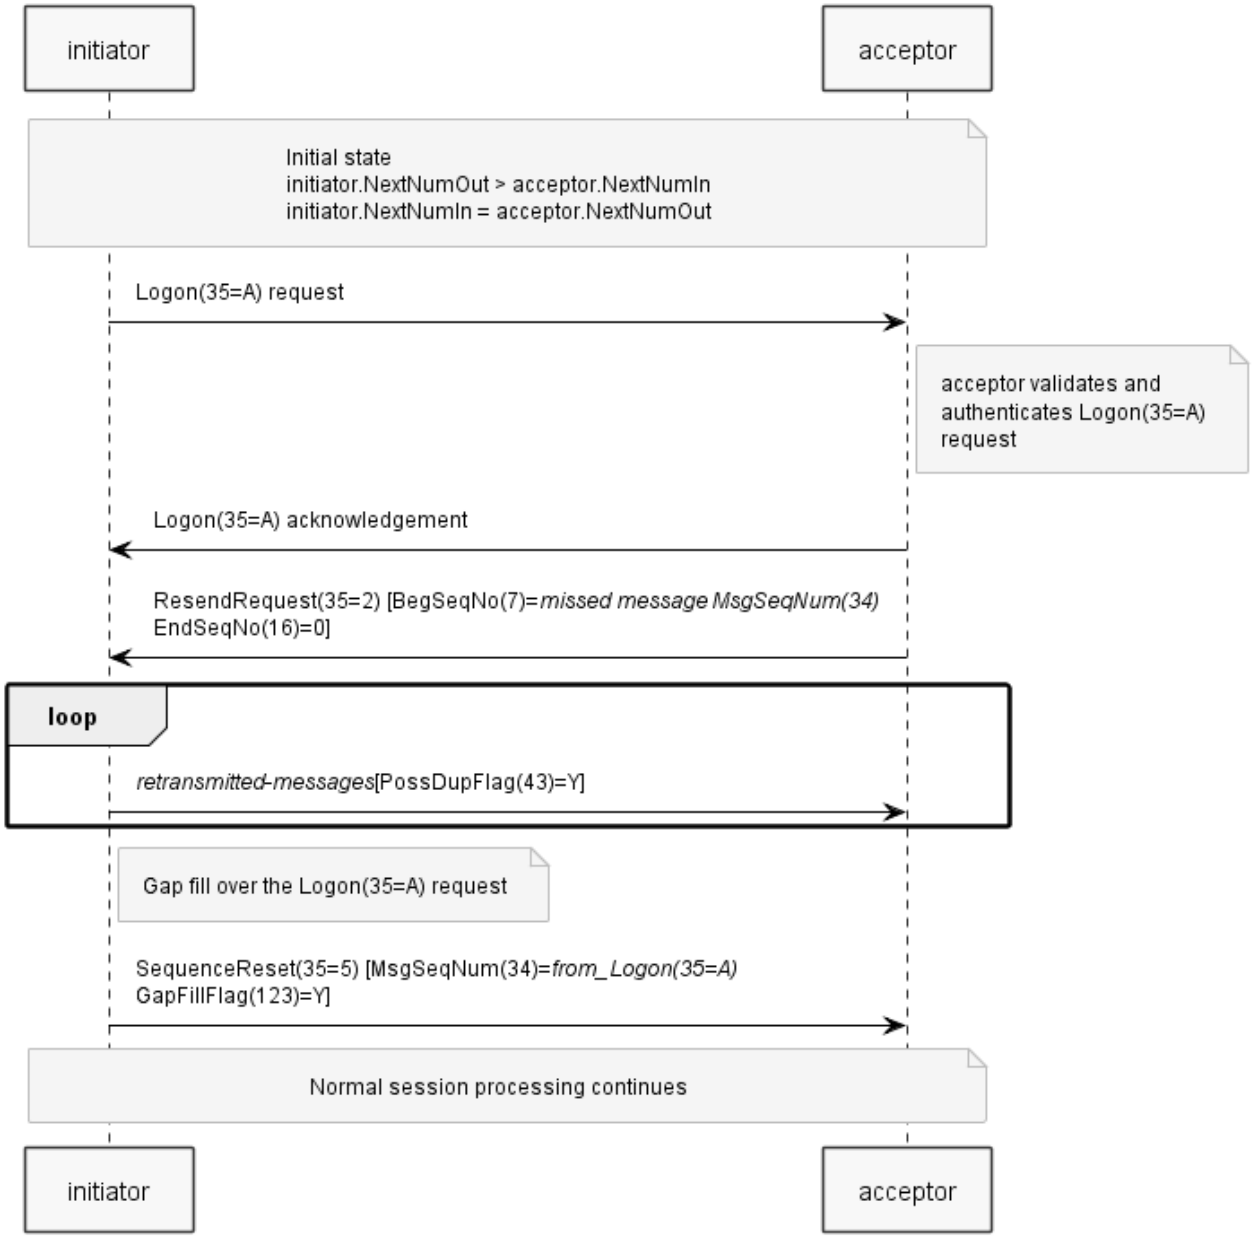

Figure 3 — ResendRequest(35=2) sent by acceptor after Logon(35=A) acknowledgement

© Copyright, 2011-2020, FIX Protocol, Limited

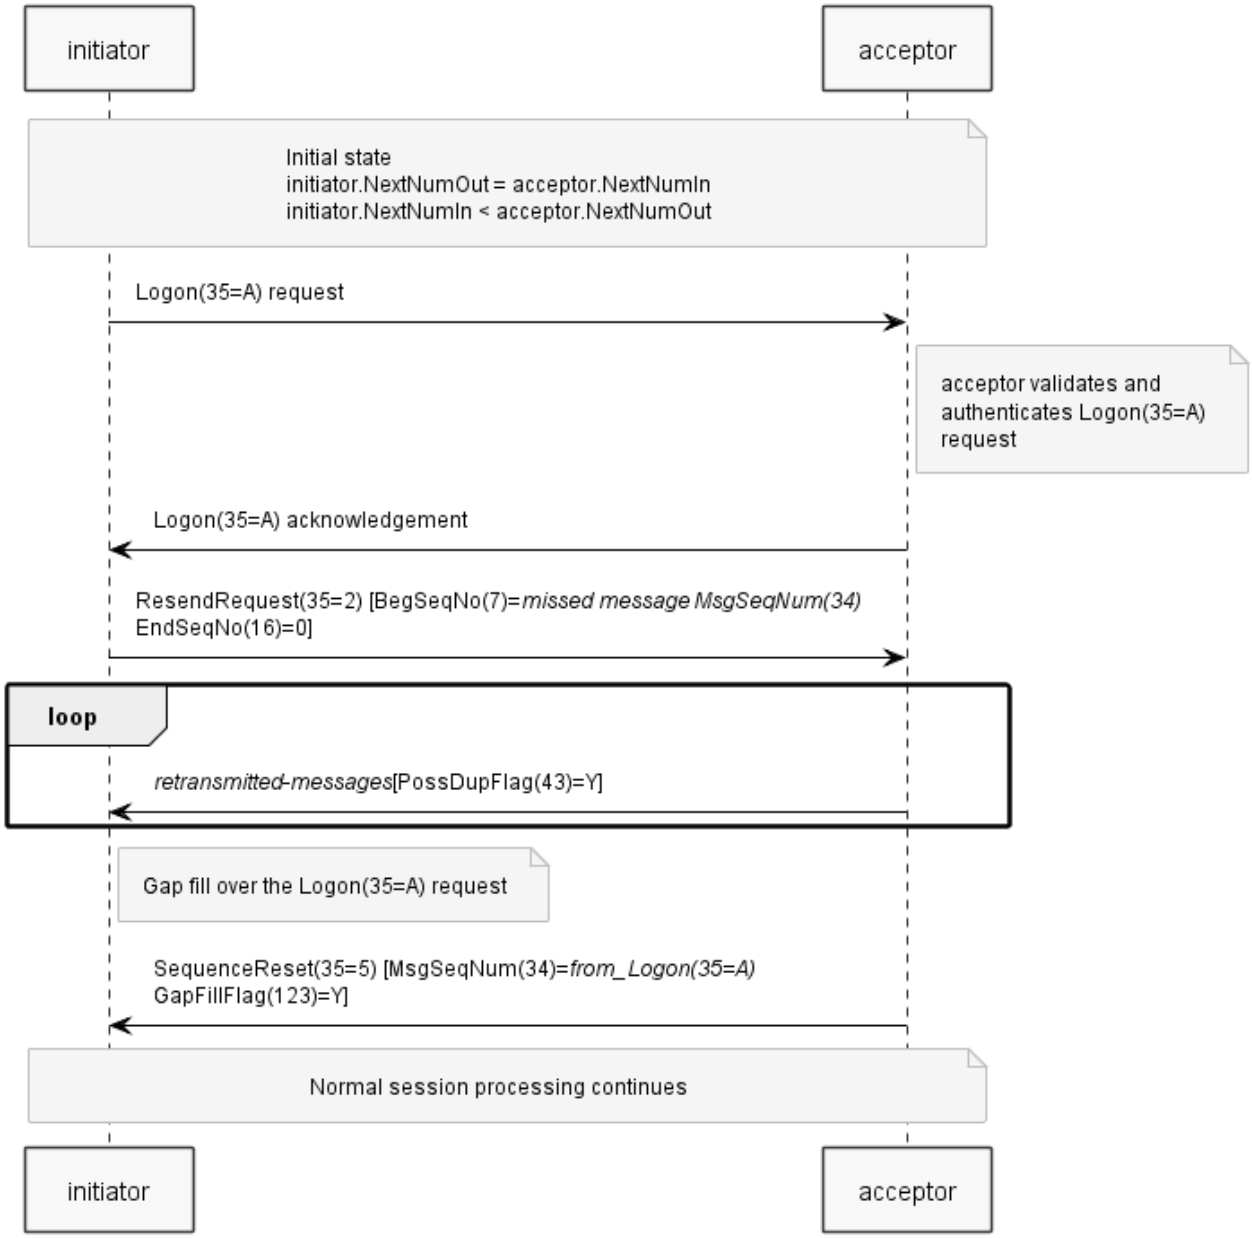

Figure 4 — ResendRequest(35=2) sent by initiator after Logon(35=A) acknowledgement

© Copyright, 2011-2020, FIX Protocol, Limited

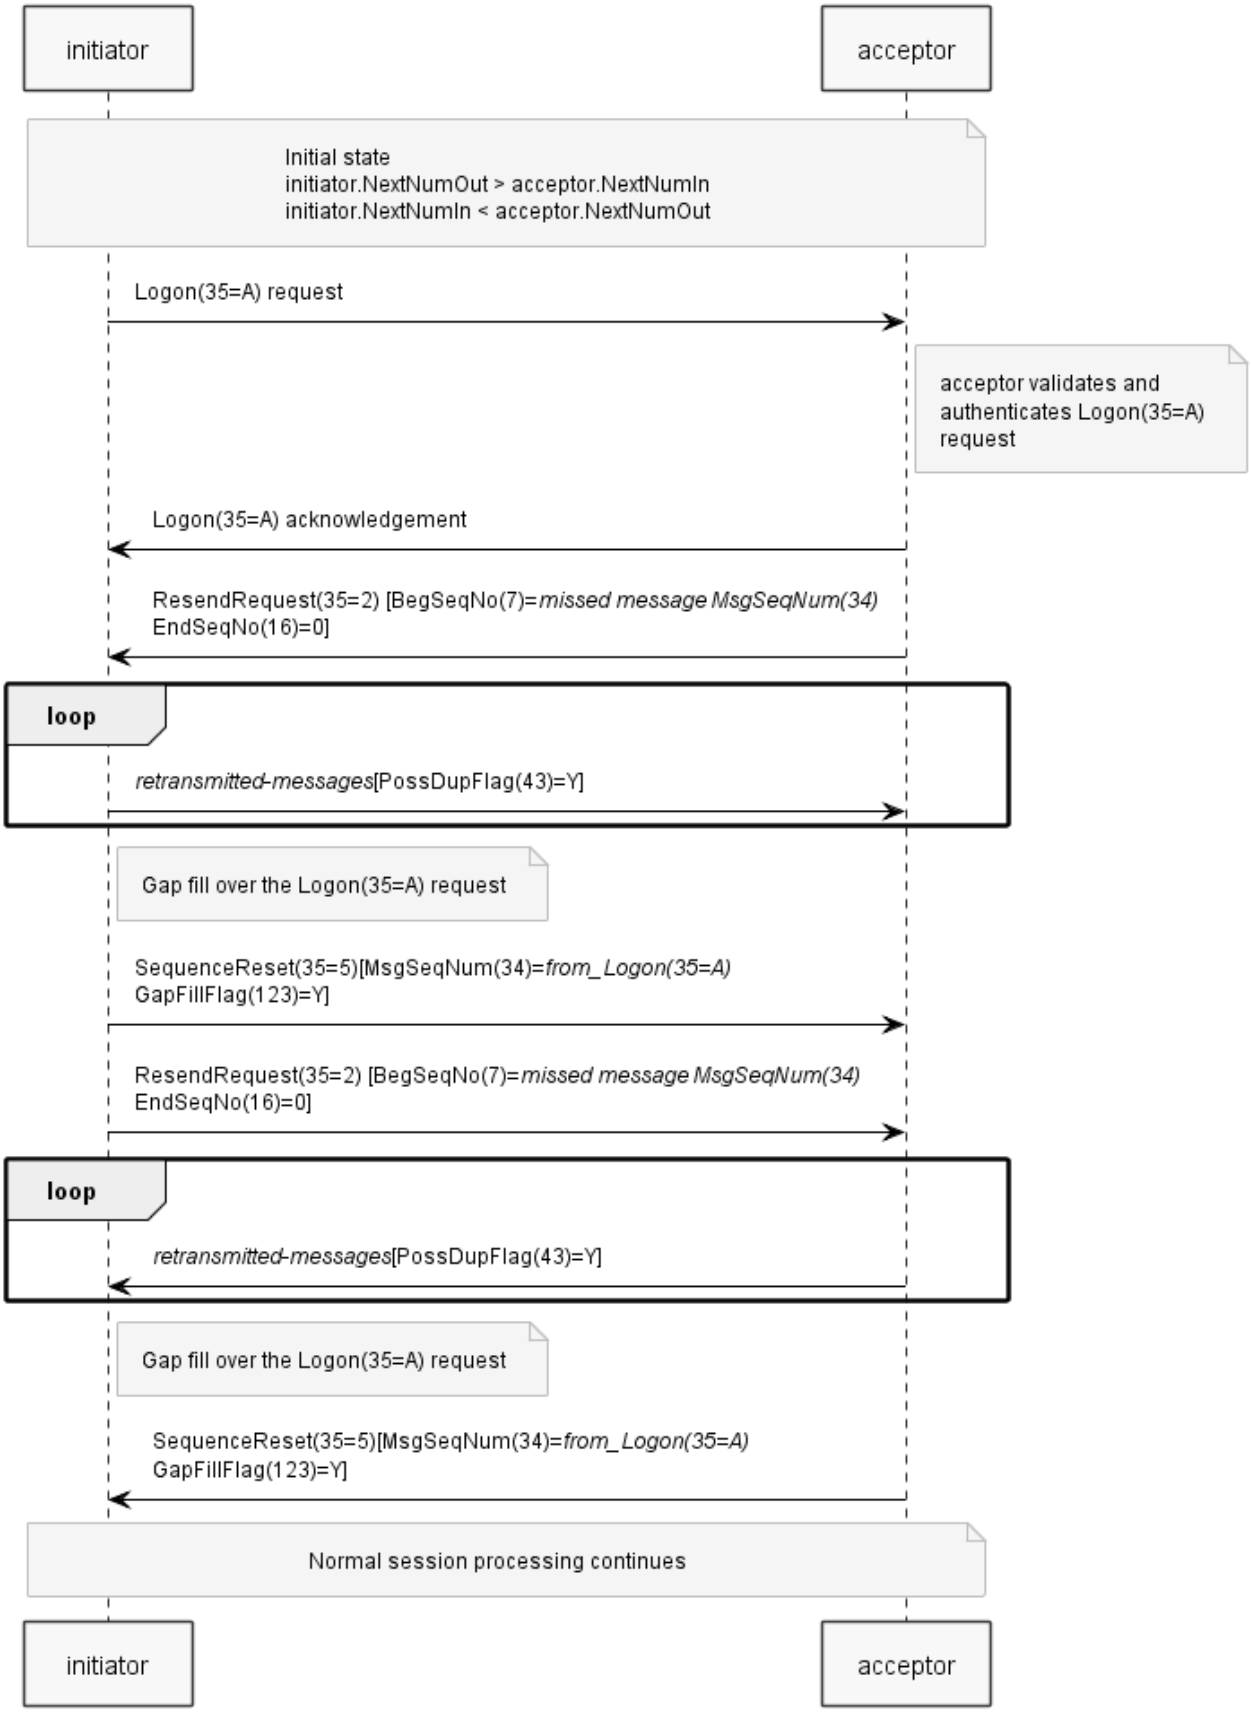

Figure 5 — ResendRequest(35=2) sent by initiator and acceptor after Logon(35=A) acknowledgement

4.4 Extended features for FIX session and FIX connection initiation

4.4.1 Using NextExpectedMsgSeqNum(789) to synchronize a FIX session

The FIX session processors may use the NextExpectedMsgSeqNum(789) field in the Logon(35=A) message to synchronize a FIX session by counterparty agreement defined in the FIX session rules of engagement[6].

The time required to resume a FIX session over a new FIX connection can be reduced by alerting the peer to the next message that is expected using NextExpectedMsgSeqNum(789) in the Logon(35=A) message. Any missing messages can be retransmitted by the peer without requiring to use ResendRequest(35=2) messages.

A FIX session may implement next expected sequence number processing to reduce the amount of message retransmission needed to re-establish a FIX session by counterparty agreement specified in the rules of engagement.

Each FIX session processor may populate the NextExpectedMsgSeqNum(789) with the next message sequence number expected from its peer on the Logon(35=A) when establishing a FIX connection.

Peers should not generate a ResendRequest(35=2) message based on MsgSeqNum(34) of the incoming Logon(35=A) message but should expect any gaps to be filled automatically via the following process.

The receiving FIX session processor receiving a Logon(35=A) message with NextExpectedMsgSeqNum(789) present shall compare the value of NextExpectedMsgSeqNum(789) with NextNumOut.

- If the received NextExpectedMsgSeqNum(789) is equal to NextNumOut, proceed sending new messages beginning with that number.
- If the received NextExpectedMsgSeqNum(789) is less than NextNumOut, perform message recovery for messages starting with the message with MsgSeqNum(34) equal to the NextExpectedMsgSeqNum(789) through to the message with MsgSeqNum(34) equal to NextNumOut - 1.
- If the received NextExpectedMsgSeqNum(789) is greater than NextNumOut, send a Logout(35=5) message to end the session with the Text(58) field populated explaining that “NextExpectedMsgSeqNum(789) > than last message sent”.

[6] FIX Orchestra may be used to communicate which FIX session profile and which operating mode is being used for a FIX enabled service.

© Copyright, 2011-2020, FIX Protocol, Limited

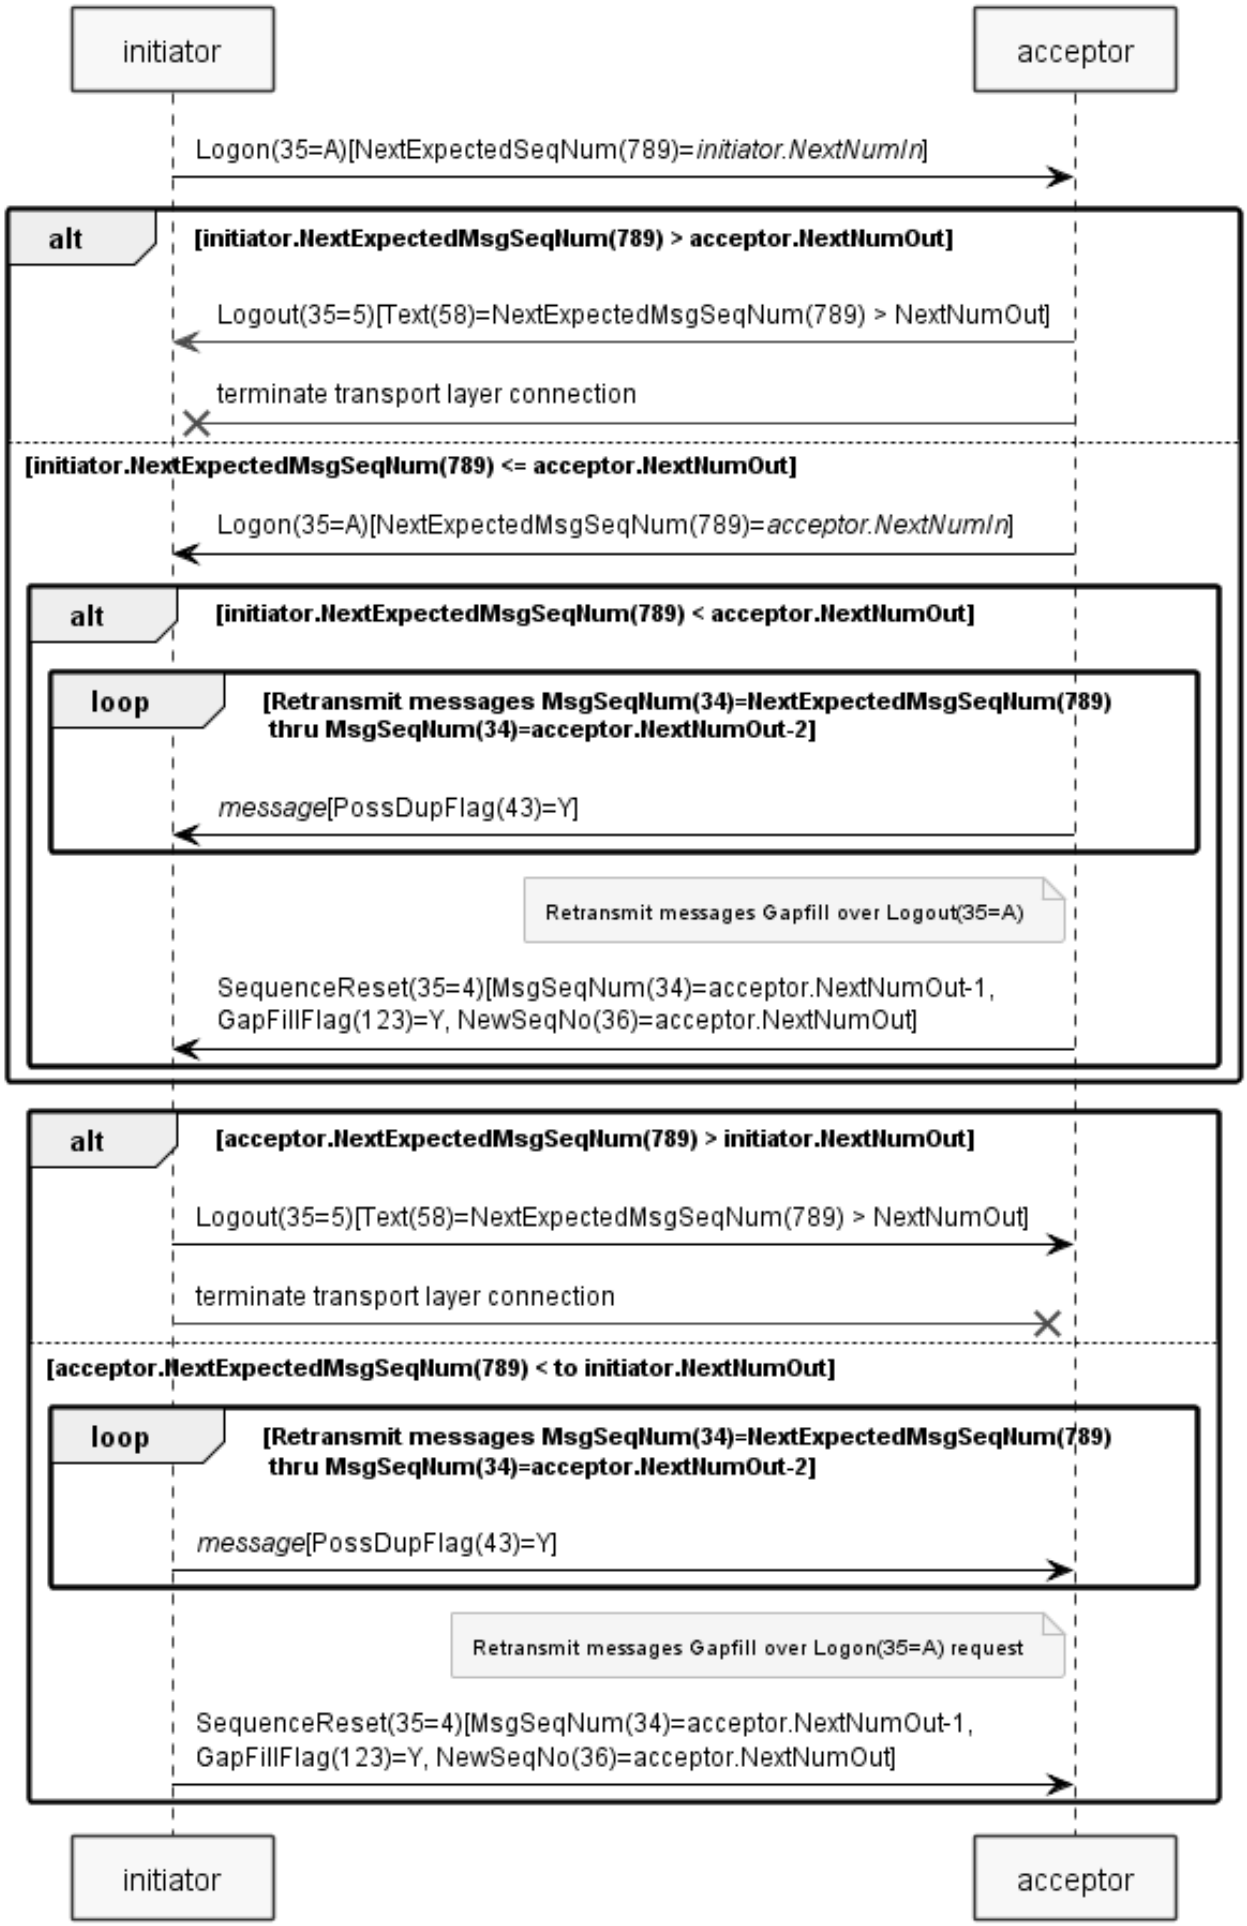

© Copyright, 2011-2020, FIX Protocol, Limited

Figure 6 — Using NextExpectedMsgSeqNum(789) to synchronize the session during the logon process

4.4.2 Using ResetSeqNumFlag(141) to reset FIX session for 24 hour connectivity

The FIX session may be reset to NextNumIn=1 and NextNumOut=1 over an active FIX session. This capability is provided for continuously operating markets that need to periodically reset the FIX session. When using the ResetSeqNumFlag(141) to maintain 24 hour connectivity and establish a new set of sequence numbers, the process should be as follows.

Counterparties must agree to the time of day when the FIX session reset will be initiated.

Counterparties must agree which peer will initiate the FIX session reset.

The peer that initiates the FIX session reset may send a TestRequest(35=1) message and wait for the HeartBeat(35=0) response to ensure that there are no message gaps prior to sending a Logon(35=A) message to reset the FIX session.

The peer initiating the FIX session reset should set its NextNumIn to 1 and NextNumOut to 1, then send a Logon(35=A) message with ResetSeqNumFlag(141) set to “Y” and MsgSeqNum(34) set to 1.

The peer receiving the Logon(35=A) message should set its NextNumIn to 2 and NextNumOut to 1, then send a Logon(35=A) acknowledgement with ResetSeqNumFlag(141) set to “Y” and with MsgSeqNum(24) set of 1.

Upon completion of the session reset, both peers must have NextNumIn = 2 and NextNumOut = 2.

If the peer is not configured to accept resetting of an inbound session the peer should send a Logout(35=5) with Text(58) indicating that resetting the sequence number is not supported and then terminate the transport layer connection.

4.4.3 Using ResetSeqNumFlag(141) to reset FIX session during FIX connection establishment[7]

The initiator of a FIX session may reset the FIX session upon initial logon via sending the Logon(35=A) with ResetSeqNumFlag(141) set to “Y”.

Counterparties must agree to support the reset of a FIX session during FIX connection establishment.

Operational risks, such as order overfills, could occur if both parties are not configured to support resetting the FIX session upon initial logon. Users of the FIX session layer are warned to take special care when permitting the FIX sessions to be reset upon FIX connection establishment.

If the acceptor is not configured to accept resetting of a FIX session during FIX connection establishment, the acceptor should send a Logout(35=5) with Text(58) indicating that resetting the sequence number upon FIX connection establishment is not supported then terminate the transport layer connection.

4.4.4 Using initiator state to restore acceptor session state[8]

An acceptor may re-establish its state via the exchange of NextExpectedMsgSeqNum(789).

This should only be used for FIX service offerings where application message recovery is performed by the application layer instead of the FIX session layer.

The state of the FIX session is assumed to be:

- the acceptor FIX session processor NextNumOut is unknown and NextNumIn is unknown.
- the initiator FIX session processor has maintained and knows its state (the values of NextNumIn and NextNumOut) between FIX connections.

Acceptor state may be recovered when NextExpectedMsgSqNum(789) is present in the Logon(35=A) request by:

- The acceptor may reconstruct its session state solely based upon the Logon(35=A) request from an initiator if NextExpectedMsgSeqNum(789) is present in the Logon(35=A) request.

[7] Functionality added by EP124.
[8] Functionality added by EP124.

© Copyright, 2011-2020, FIX Protocol, Limited

- The acceptor should set its NextNumIn to the MsgSeqNum(34) + 1 from the Logon(35=A) request and set its NextNumOut to the NextExpectedMsgSeqNum(789) from the Logon(35=A) request.
- The acceptor should then send a SequenceReset(35=4) message with GapFillFlag(123) set to "Y" and NewSeqNo(36) set to NextNumOut+1 and AppLevelIndicator(1744) set to "1" (application layer recovery is needed) to inform the initiator that application messages will need to be recovered.

Acceptor state may be recovered when NextExpectedMsgSeqNum(789) is not present in the Logon(35=A) request by:

- The acceptor may reconstruct its session state based upon the Logon(35=A) request from an initiator by setting its NextNumIn to the MsgSeqNum(34) + 1 from the Logon(35=A) request and setting its NextNumOut to 1 when the NextExpectedMsgSeqNum(789) is not present in the Logon(35=A) request.
- The initiator should respond to the Logon(35=A) acknowledgement with a Logout(35=5) with SessionStatus(1409) set to 9 (received MsgSeqNum(34) is too low) and NextExpectedMsgSeqNum(789) set to the initiator's NextNumIn, followed by terminating the transport layer connection.
- The acceptor should set its NextNumOut to the NextExpectedSeqNum(789) value from the Logout(35=5) received from the initiator.
- The initiator should then transmit a new Logon(35=A) request with MsgSeqNum(34) set to its NextNumOut value.
- The acceptor should respond with Logon(35=A) acknowledgement with the MsgSeqNum(34) set to the NextNumOut value obtained from the previous initiator Logout(35=5).
- The acceptor should then send a SequenceReset(35=4) message with GapFillFlag(123) set to "Y" and NewSeqNo(36) set to NextNumOut+1 and AppLevelIndicator(1744) set to "1" (application layer recovery is needed) to inform the initiator that application messages may need to be recovered.

4.5 Message exchange during a FIX connection

After establishing a FIX connection within a FIX session and synchronizing messages, normal message exchange begins.

The initiator and acceptor may send a TestRequest(35=1) message and wait for the HeartBeat(35=0) message sent in response to the TestRequest(35=1) message, before sending queued or new messages, to further confirm that the FIX connection is established.

The initiator and acceptor shall validate incoming FIX messages to ensure proper tagvalue encoding.

The integrity of message data content shall be verified for message length and the tagvalue encoding checksum according to the FIX tagvalue encoding specification.

The initiator and acceptor shall synchronize their messages and detect gaps by comparing the MsgSeqNum(34) field in each message received from its peer with the NextNumIn it maintains and increments after successful receipt of each message.

A FIX session processor that encounters a sequence number gap shall perform message recovery.

4.5.1 FIX connection keep alive (heartbeat)

The FIX session processor must send a HeartBeat(35=0) message to the peer during periods of inactivity, ensuring that the HeartBeat(35=0) message will be received by the peer within the heartbeat interval.

If a FIX session processor does not receive a message within the heartbeat interval, test request processing should be initiated.

4.5.2 Garbled message processing

A message shall be considered garbled if any of the following occur as a result of encoding, decoding, or transmission errors:

- BeginString(8) is not the first tag in a message or is not one of the defined FIX session profile identifiers ("8=FIX.4.4", "8=FIXT.1.1").

© Copyright, 2011-2020, FIX Protocol, Limited

- BodyLength(9) is not the second tag in a message or does not contain the correct byte count.
- MsgType(35) is not the third tag in a message.
- Checksum(10) is not the last tag or contains an incorrect value.

The FIX session layer presumes that a garbled message is received due to a transmission error rather than a FIX session processor defect and should be recoverable from the peer.

The receiving FIX session processor must disregard the garbled message and not increment NextNumIn.

The FIX session processor should log each encountered garbled message to assist in problem detection and diagnosis.

Receipt of the next valid FIX message after a garbled message was ignored will result in the detection of a sequence gap as the MsgSeqNum(34) will be greater than NextNumIn which should then cause the receiving FIX session processor to initiate message recovery.

It is recommended that FIX session processors implement logic to recognize the possible infinite retransmission loop, which may be encountered when a garbled message is repeatedly retransmitted due to a fault in the peer FIX session processor.

4.5.3 Missing sequence number

If MsgSeqNum(34) is missing, a Logout(35=5) message should be sent, terminating the FIX connection with the Text(58) field describing the missing field, as this likely indicates a serious application error that is likely only circumvented by software modification.

4.5.4 Rejecting invalid messages

Incoming messages should be rejected using the Reject(35=3) message when:

- an incoming message is not garbled but does not contain the appropriate required fields may be rejected by sending a Reject(35=3) message to the peer.
- MsgType(35) of the incoming message is unknown or not supported.

As a rule, messages should be forwarded to the trading application for business level rejections whenever possible instead of being rejected at the session layer.

Rejected messages must be logged and NextNumIn incremented by 1.

Generation and receipt of a Reject(35=3) message indicates a serious error that could be the result of faulty logic or noncompliance with the rules of engagement in either peer.

A diagnostic message describing the error should be provided in the Text(58) field of the Reject(35=3) message and the SessionRejectReason(373) field set to the appropriate reject reason.

The MsgSeqNum(34) from the message being rejected should be returned in RefSeqNum(45).

The RefTagID(371) should be set to the tag of the field associated with the reject reason.

The RefMsgType(372) field should be the MsgType(35) of the rejected message.

If the sending application chooses to retransmit the rejected message, the message being resent must be assigned a new MsgSeqNum(34) and sent with PossResend(97) set to “Y”.

© Copyright, 2011-2020, FIX Protocol, Limited

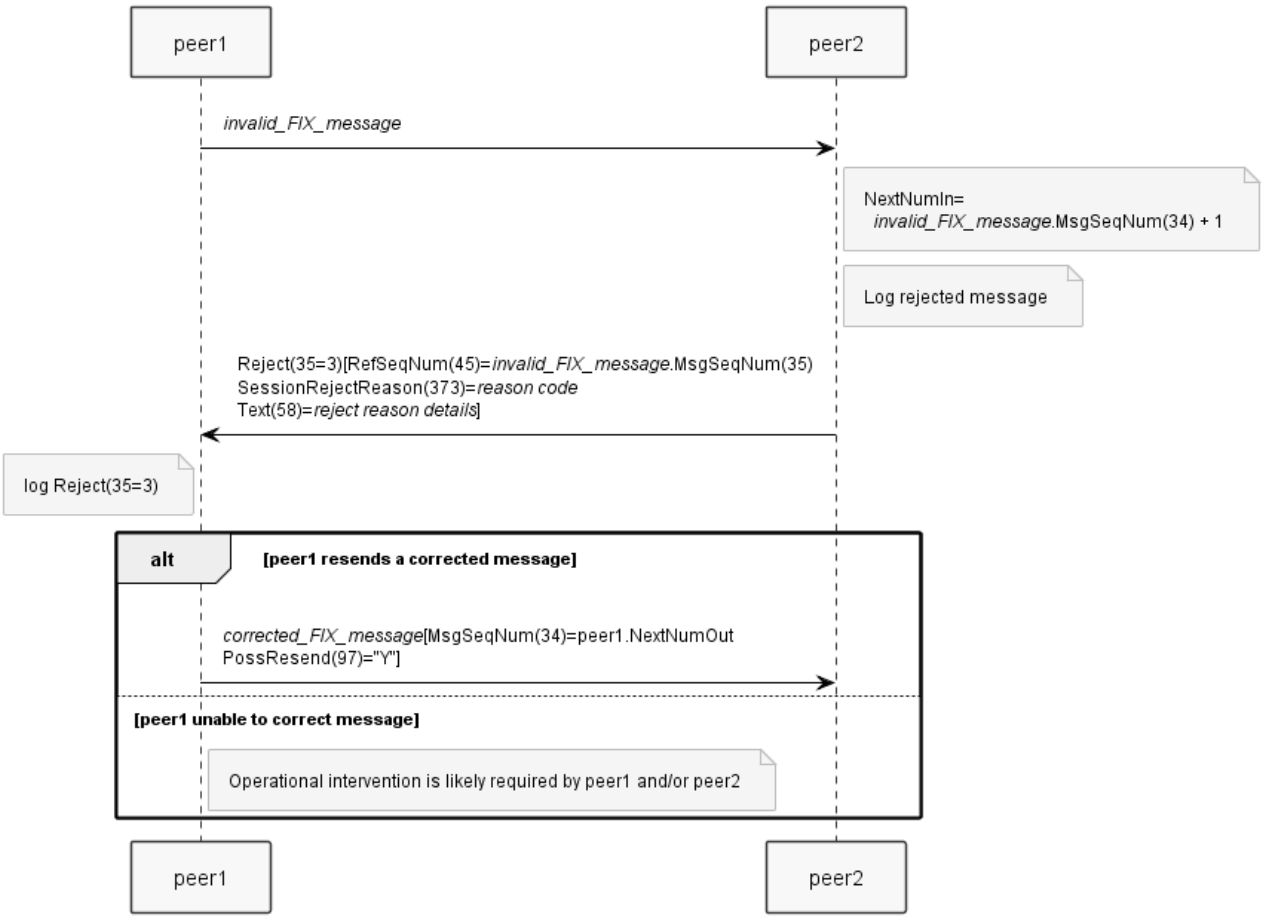

Figure 7 — Session layer reject using Reject(35=3) due to invalid message received

4.5.5 Test Request Processing

A TestRequest(35=1) is sent to determine the status of the peer FIX session processor.

The TestReqID(112) field must be present in the TestRequest(35=1) message.

The recipient of a TestRequest(35=1) message must respond by sending a HeartBeat(35=0) message with TestReqID(112) present and set to the TestReqID(112) value from the TestRequest(35=1) message.

Note: Depending upon the implementation of the FIX session processor it may be possible to receive HeartBeat(35=0) messages from the peer even though the peer FIX session processor is not functioning properly. A TestRequest(35=1) may be sent to determine if the peer FIX session processor is still responsive. Not receiving a valid response to the TestRequest(35=1), which is a HeartBeat(35=0) message containing the value of the TestReqID(112) from the TestRequest(35=1) message, provides some evidence that the peer is not functioning properly.

Failure to receive a HeartBeat(35=0) response with TestReqID(112) present and set to the value from the TestRequest(35=1) message is considered an error. The FIX connection should be terminated by sending a Logout(35=5) message with the Text(58) field stating that the session was terminated due to lack of a response to a TestRequest(35=1) message, followed by terminating the transport layer connection.

The period of time that the FIX session processor should wait for the HeartBeat(35=0) response should be defined as a *TestRequestThreshold* multiplied by the *heartbeat interval*.

A reasonable *TestRequestThreshold* is anywhere from 1.2 to 2.0 depending on latency sensitivity of the application using the FIX session layer.

© Copyright, 2011-2020, FIX Protocol, Limited

The *TestRequestThreshold* may be specified by counterparty agreement or specified in the rules of engagement[9].

The operator of the FIX session processor may send a TestRequest(35=1) message at any time during a FIX connection. The following figure shows an example of a TestRequest(35=1) message issued to determine if the peer is still responsive.

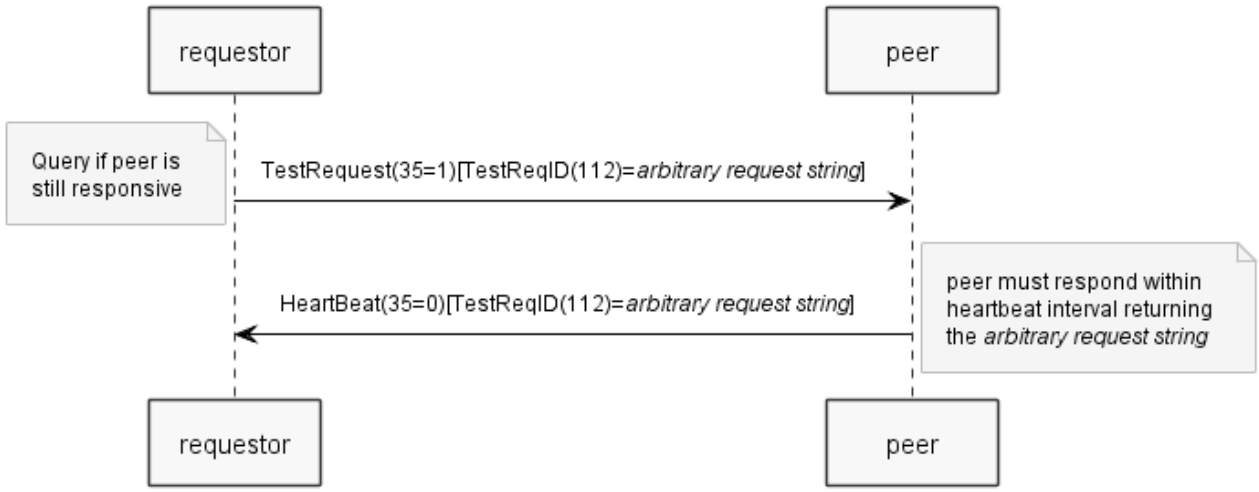

Figure 8 — Issuing a TestRequest(35=1) to determine if peer is still responsive

4.6 FIX connection termination

Either the initiator or the acceptor may send a Logout(35=5) message to request termination of a FIX connection. Normal termination of the message exchange session shall be completed via the exchange of Logout(35=5) messages. Termination by other means should be considered an abnormal condition and dealt with as an error. FIX connection termination without receiving a Logout(35=5) message should treat the peer as logged out.

A FIX session processor may send a TestRequest(35=1) message before sending the Logout(35=5) message to force a heartbeat from the other side. This helps to ensure that there are no sequence number gaps, which indicate that a ResendRequest(35=2) message is necessary before completing the session.

The Logout(35=5) initiator must wait for the peer to respond with a Logout(35=5) acknowledgement message before terminating the FIX connection. This gives the peer a chance to perform any gap fill operations that may be necessary. Once the messages from the ResendRequest(35=2) message have been received, the peer should issue the Logout(35=5) message.

The Logout(35=5) initiator should terminate the FIX connection if the peer does not respond within a reasonable time frame. Twice the value specified in the HeartBtInt(108) field of the Logon(35=A) message is recommended.

[9] The FIX Orchestra Interface specification may be used to specify the *TestRequestThreshold*.

© Copyright, 2011-2020, FIX Protocol, Limited

4.6.1 Normal logout processing

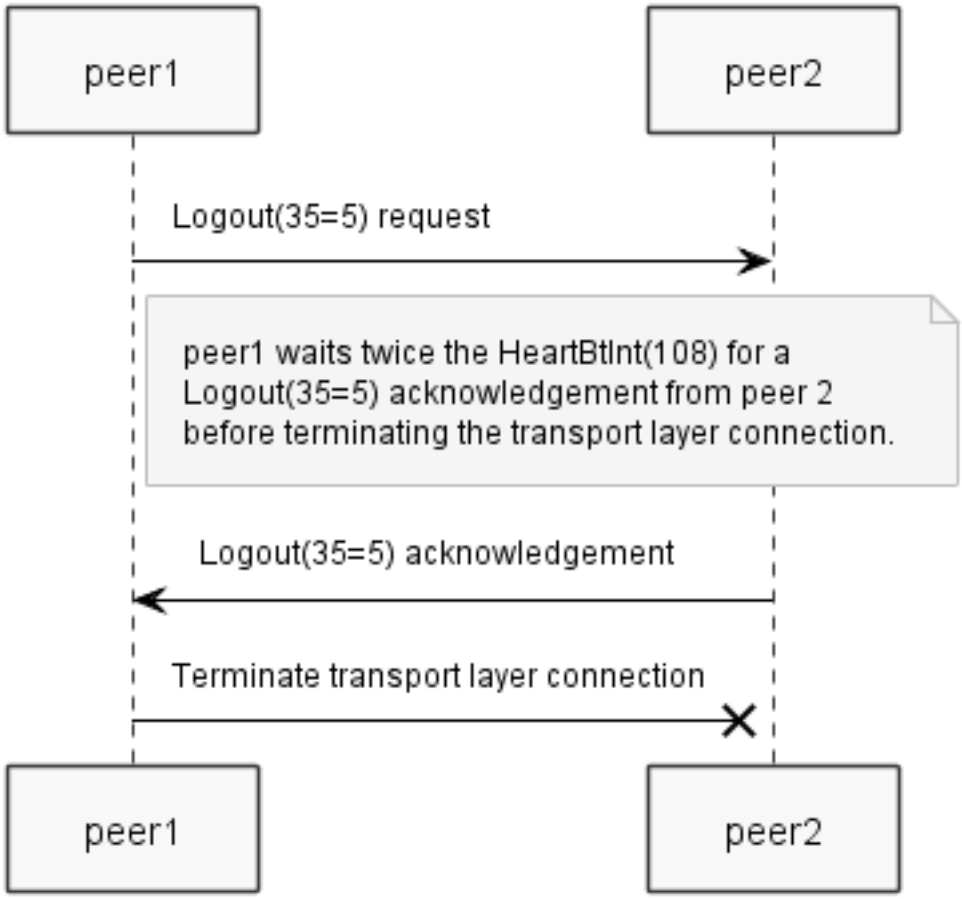

Figure 9 — Successful Logout scenario

© Copyright, 2011-2020, FIX Protocol, Limited

4.6.2 Logout without acknowledgement from peer

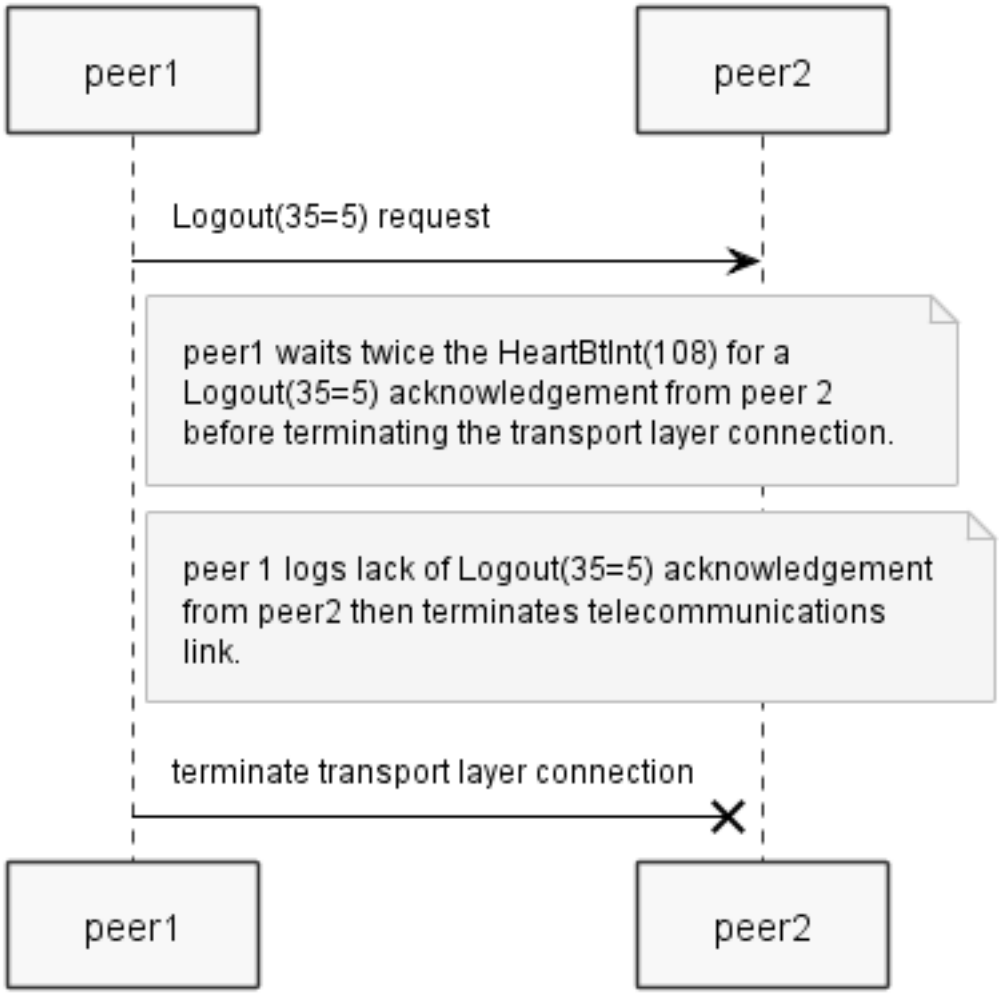

Figure 10 — Logout(35=5) acknowledgement not received

© Copyright, 2011-2020, FIX Protocol, Limited

4.6.3 Logout with retransmission of missed messages

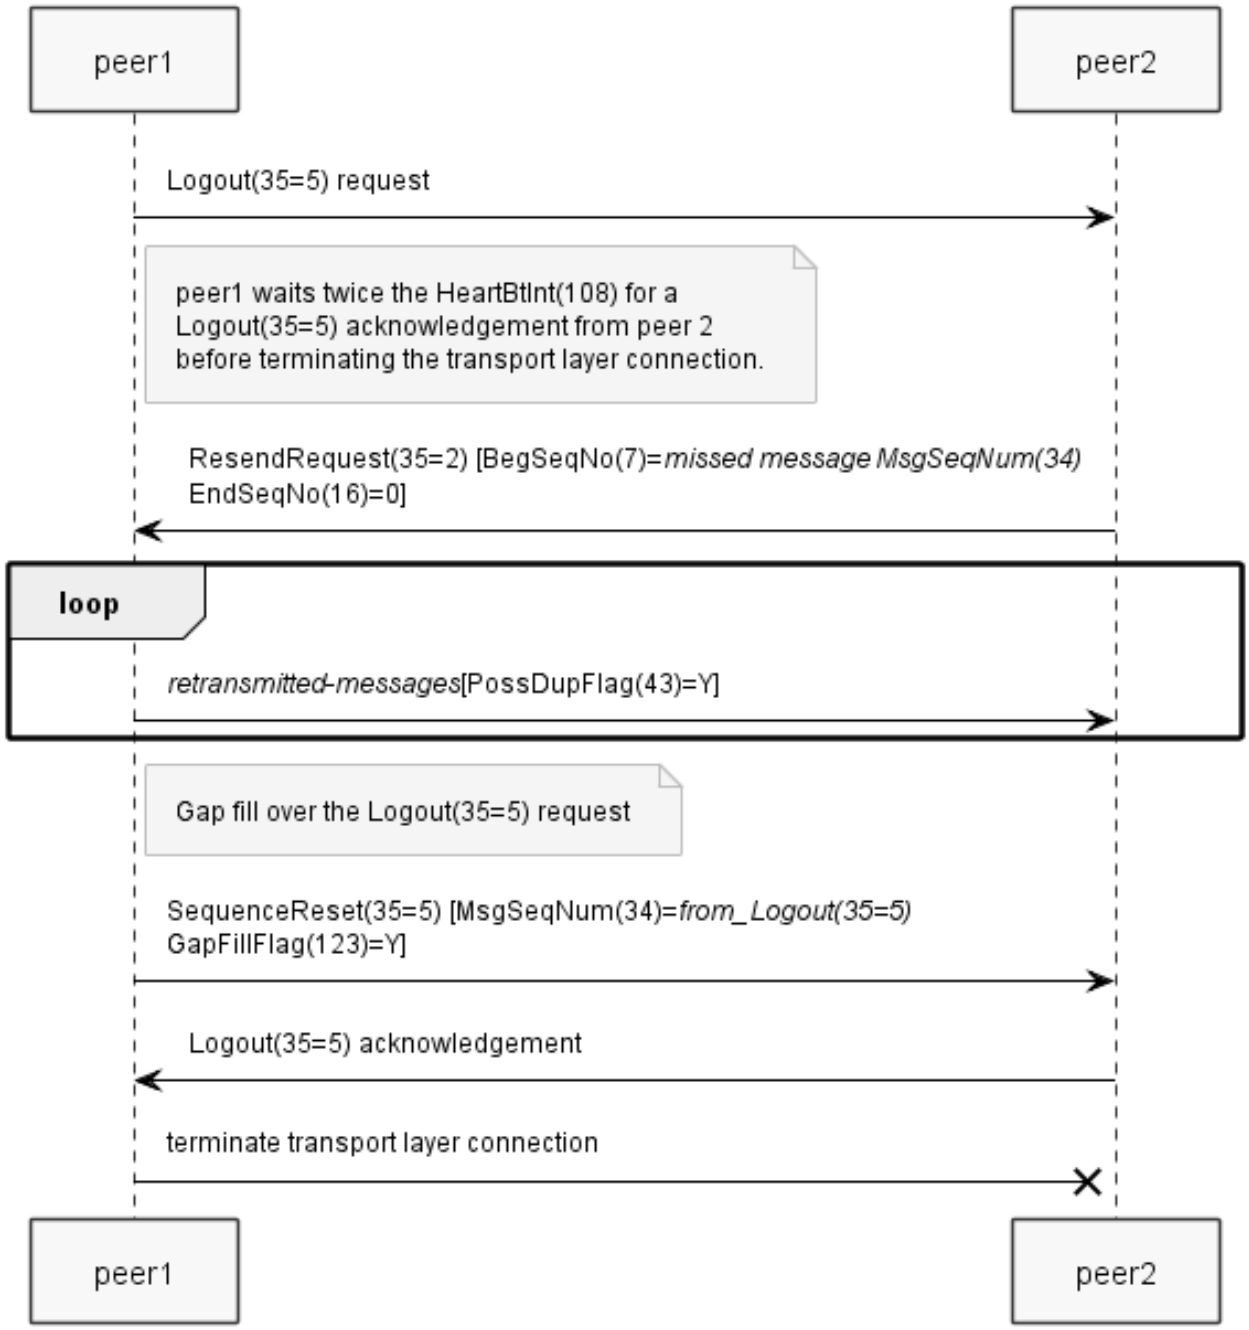

Figure 11 — Processing of ResendRequest(35=2) messages before Logout(35=5) acknowledgement

The impact of a FIX connection termination on the application layer is left to the application layer; it is undefined in the FIX session layer.

4.6.4 When to terminate a FIX connection by terminating the transport layer connection instead of sending a Logout(35=5)

In general, a Logout(35=5) message should always be sent prior to shutting down a connection. If it is being sent due to an error condition, the Text(58) field of the Logout(35=5) should provide a descriptive reason, so that operational support of the remote FIX system can diagnose the problem. There are exceptions, when it is recommended that a Logout(35=5) message not be sent, these include:

© Copyright, 2011-2020, FIX Protocol, Limited

- The FIX session should be immediately terminated by terminating the transport layer cnnection without sending a Logout(35=5) message when the BeginString(8), SenderCompID(49), TargetCompID(56), or IP address in the Logon(35=A) request of the session initiator is invalid. This logon attempt could be an unauthorized access attempt. Terminating the connection without transmitting a Logout(35=5) message avoids divulging information about the SenderCompID(49)/TargetCompID(56) and the version of FIX being used over the transport layer.
- If, during a logon, one receives a second connection attempt while a valid FIX session is already underway for that same SenderCompID(49), the session acceptor should immediately terminate the second connection attempt and not send a Logout(35=5) message. Sending a Logout(35=5) message runs the risk of interfering with and possibly adversely affecting the current active FIX connection. For example, sending a Logout(35=5) message should consume a sequence number that would cause an out of sequence condition for the established FIX session.

In all other cases, if sending a Logout(35=5) message does not create risk or violate security, it should be sent with a descriptive text message in the Text(58) field.

4.7 Extended features for FIX connection Termination

4.7.1 Using NextExpectedMsgSeqNum(789) when terminating FIX connection due to invalid MsgSeqNum(34)[10]

When a FIX session processor receives a Logon(35=A) message with a MsgSeqNum(34) that is less than the NextNumIn from a peer, a Logout(35=5) message may be sent that includes the NextExpectedMsgSeqNum(789) set to NextNumIn and the SessionStatus(1409) set to 9 (received MsgSeqNum(34) is too low). This approach permits the peer to reset their NextNumOut to reestablish the FIX session.

When a FIX session processor receives a Logon(35=A) message with a NextExpectedMsgSeqNum(789) value that is greater than NextNumOut from a peer, a Logout(35=5) message may be sent that includes the SessionStatus(1409) set to 10 (received NextExpectedMsgSeqNum(789) is too high), then terminate the transport layer connection. This approach allows the peer to reset their NextNumIn to the MsgSeqNum(34) present in the Logout(35=A) message + 1.

When a FIX session processor receives a Logon(35=A) message with a MsgSeqNum(34) that is less than the NextNumIn and a NextExpectedMsgSeqNum(789) value that is greater than NextNumOut from a peer, a Logout(35=5) message may be sent that includes SessionStatus(1409) equal 9 (received MsgSeqNum(34) is too low) and the NextExpectedMsgSeqNum(789) set to NextNumIn, then terminate the transport layer connection. This approach allows the peer to reset their NextNumIn to the MsgSeqNum(34) present in the Logout(35=5) message + 1 and the NextNumOut reset to the NextExpectedMsgSeqNum(789) value.

4.8 Message recovery

A message gap occurs when the MsgSeqNum(34) of an incoming message is greater than the NextNumIn maintained by the FIX session processor.

During initialization of a FIX connection or at any time during the FIX connection, a message gap may occur.

When the MsgSeqNum(34) on an inbound message is greater than NextNumIn, the FIX session processor must perform message recovery processing as this is an indication that there were messages sent by the peer that were not received or may have been garbled during transmission.

4.8.1 Ordered message processing

The FIX protocol assumes complete ordered delivery of messages processed in MsgSeqNum(34) order.

FIX session processors must detect gaps in the sequence of MsgSeqNum(34) values by maintaining the next expected sequence number NextNumIn.

[10] Functionality added by EP124.

© Copyright, 2011-2020, FIX Protocol, Limited

If the MsgSeqNum(34) of an incoming message is greater than NextNumIn, then the receiving FIX session processor should request the peer to retransmit messages following the Request retransmission of messages specifications.

The FIX session should be terminated if the incoming message MsgSeqNum(34) is less than NextNumIn and PossDupFlag(43) is not set to "Y", except if the message is the SequenceReset(35=4) with the GapFillFlag(123) set to "N" (Sequence Reset). A Logout(35=5) message should be sent with the Text(58) field set to indicate that the value in MsgSeqNum(34) is less than NextNumIn when PossDupFlag(43) is not set to "Y" and SessionStatus(1409) set to 9 (received MsgSeqNum(34) is too low.), followed by terminating the transport layer connection.

4.8.2 Request retransmission of messages

There are two alternative approaches to resolving message sequence number gaps.

The two approaches are:

- Request all messages subsequent to the last message received.

  For example, if the receiver misses the second of five messages, the application could ignore messages 3 through 5 and generate a resend request for messages 2 through 5, or, preferably 2 through 0 (where 0 represents all messages after message 2).

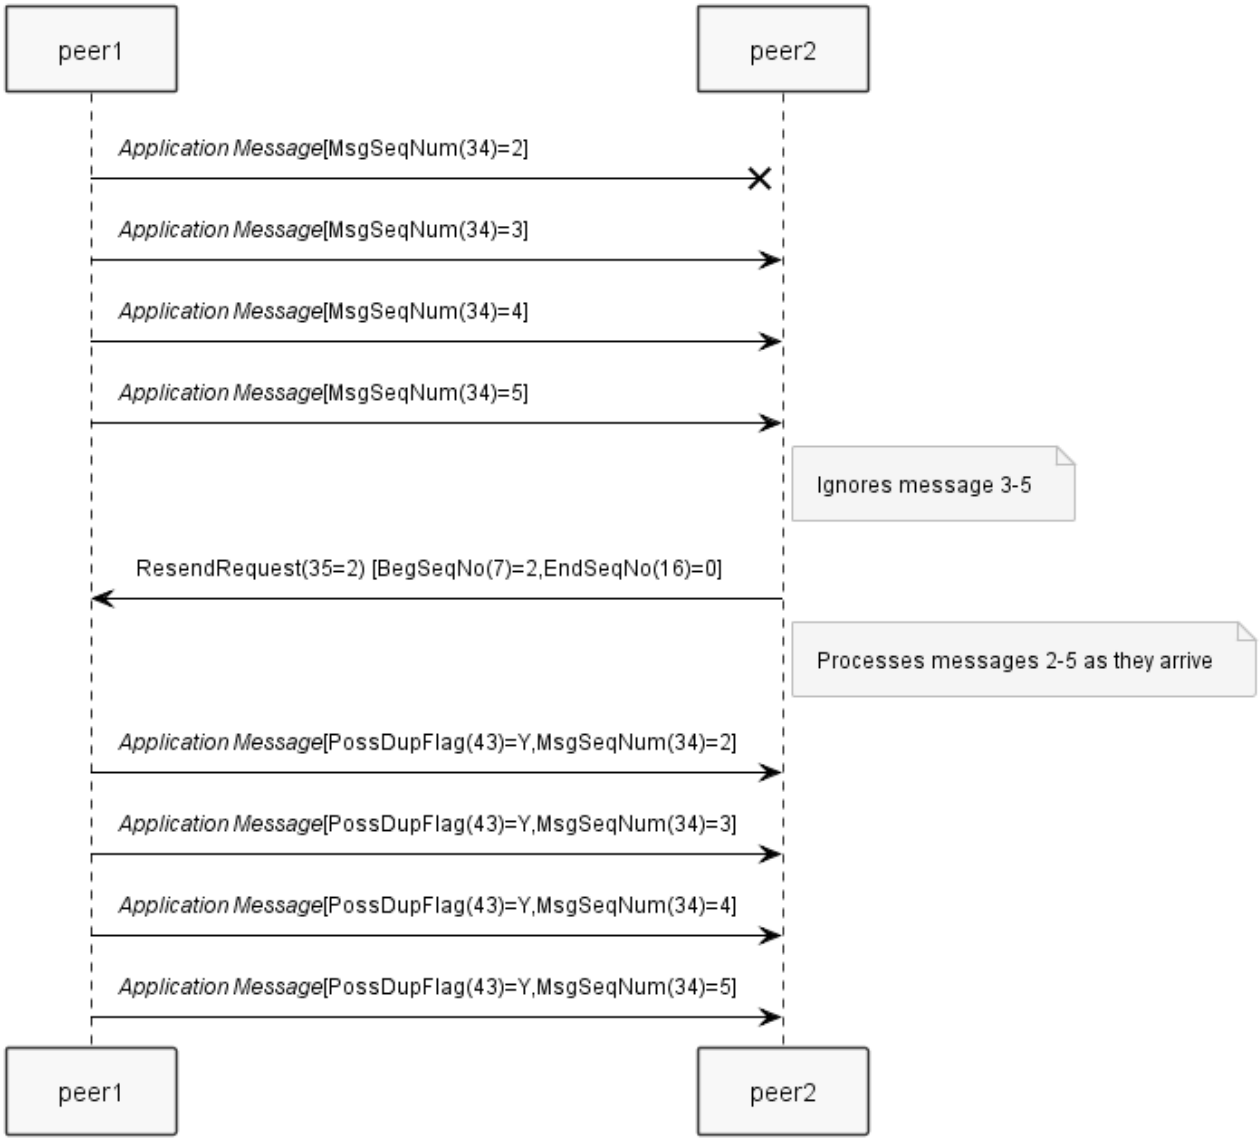

Figure 12 — Using ResendRequest(35=2) message to request missed message and subqsequent messages

- Request only the specific messages missed while maintaining an ordered list of all newer messages.

© Copyright, 2011-2020, FIX Protocol, Limited

Using the above example, messages 3 through 5 would be saved for later processing and a ResendRequest(35=2) message would be sent only for message 2.

In both cases, messages 3 through 5 should not be processed before message 2.

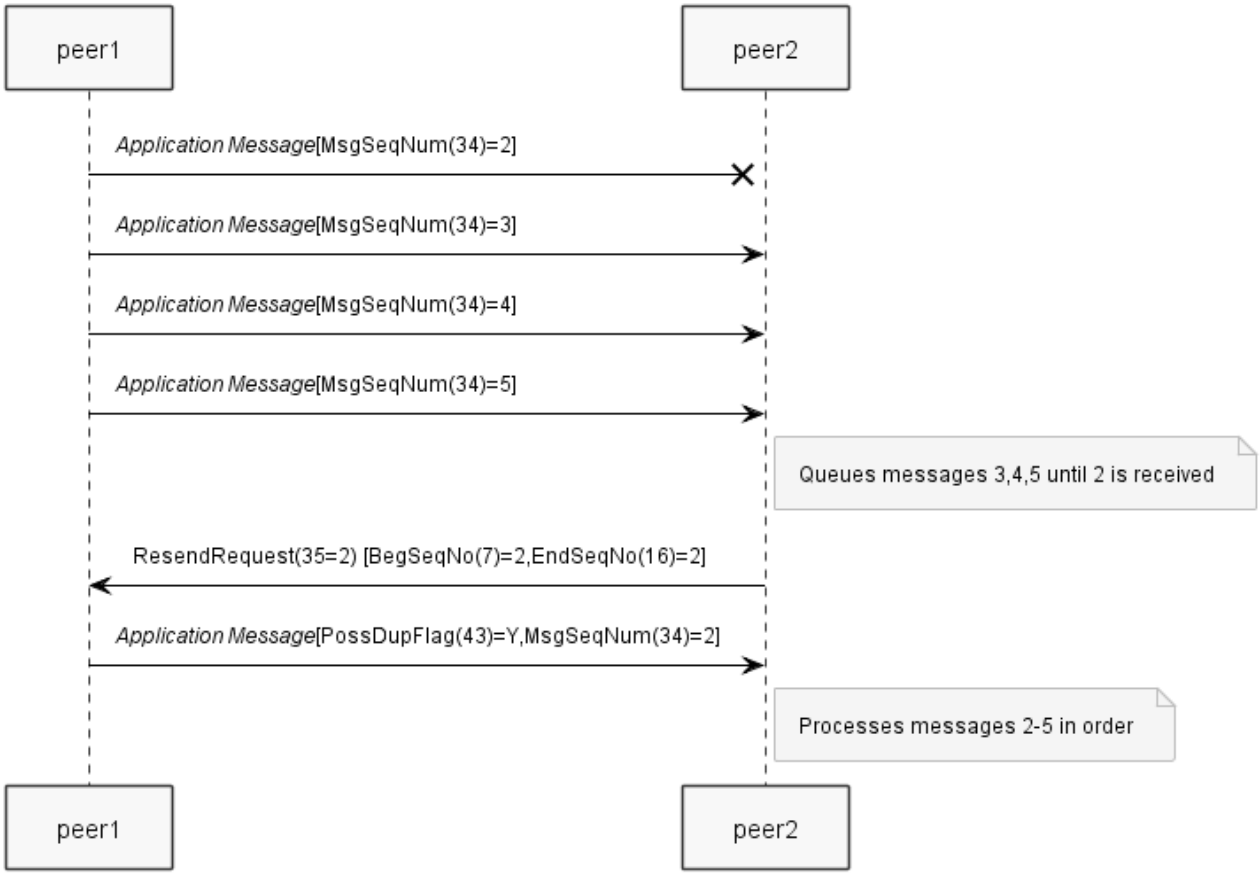

Figure 13 — Using ResendRequest(35=2) message to request only the missed message

The ResendRequest(35=2) message with BeginSeqNo(7) and EndSeqNo(16) present should be sent to the peer FIX session processor to request missing messages when a gap is detected.

The ResendRequest(35=2) may be used to request retransmission of a single message, a range of messages or all messages subsequent to a particular message.

The receiving FIX session processor must process incoming messages in MsgSeqNum(34) order.

The ResendRequest(35=2) message may be used to specify which messages require retransmission in the following ways:

- To request a single message: Both BeginSeqNo(7) and EndSeqNo(16) are set the MsgSeqNum(34) of the missing message.
- To request a range of messages: BeginSeqNo(7) is set to the MsgSeqNum(34) of the first message of the range of missing messages and EndSeqNo(16) is set to the MsgSeqNum(34) of the last message of the range of missing messages.
- To request all messages subsequent to a particular missing message: BeginSeqNo(7) is set to the MsgSeqNum(34) of the first message of range and EndSeqNo(16) is set to 0. Zero is used to specify all messages after the message with MsgSeqNum(34)=BeginSeqNo(7)[11].

[11] Setting EndSeqNo(16) to 0 has been the recommended approach since FIX.4.2.

© Copyright, 2011-2020, FIX Protocol, Limited

4.8.3 Responding to a ResendRequest(35=2) message

Upon receipt of a ResendRequest(35=2) message, the resender shall respond by either initiating a normal gap fill process or, in exceptional circumstances, by forcing a reset of the sequence number. In either case, the resender assumes responsibility for the results of the decision to retransmit or not retransmit messages.

The peer receiving the ResendRequest(35=2) may choose not to retransmit certain application messages. For instance, if orders or quotes require retransmission, the sender may choose not to retransmit them because too much time has elapsed, causing the orders to become stale or no longer acceptable due to a change in market state.

The SequenceReset(35=4) message with GapFillFlag(123) set to "Y" (Gap Fill) must be used to skip messages that a sender does not wish to retransmit in order to eliminate all gaps.

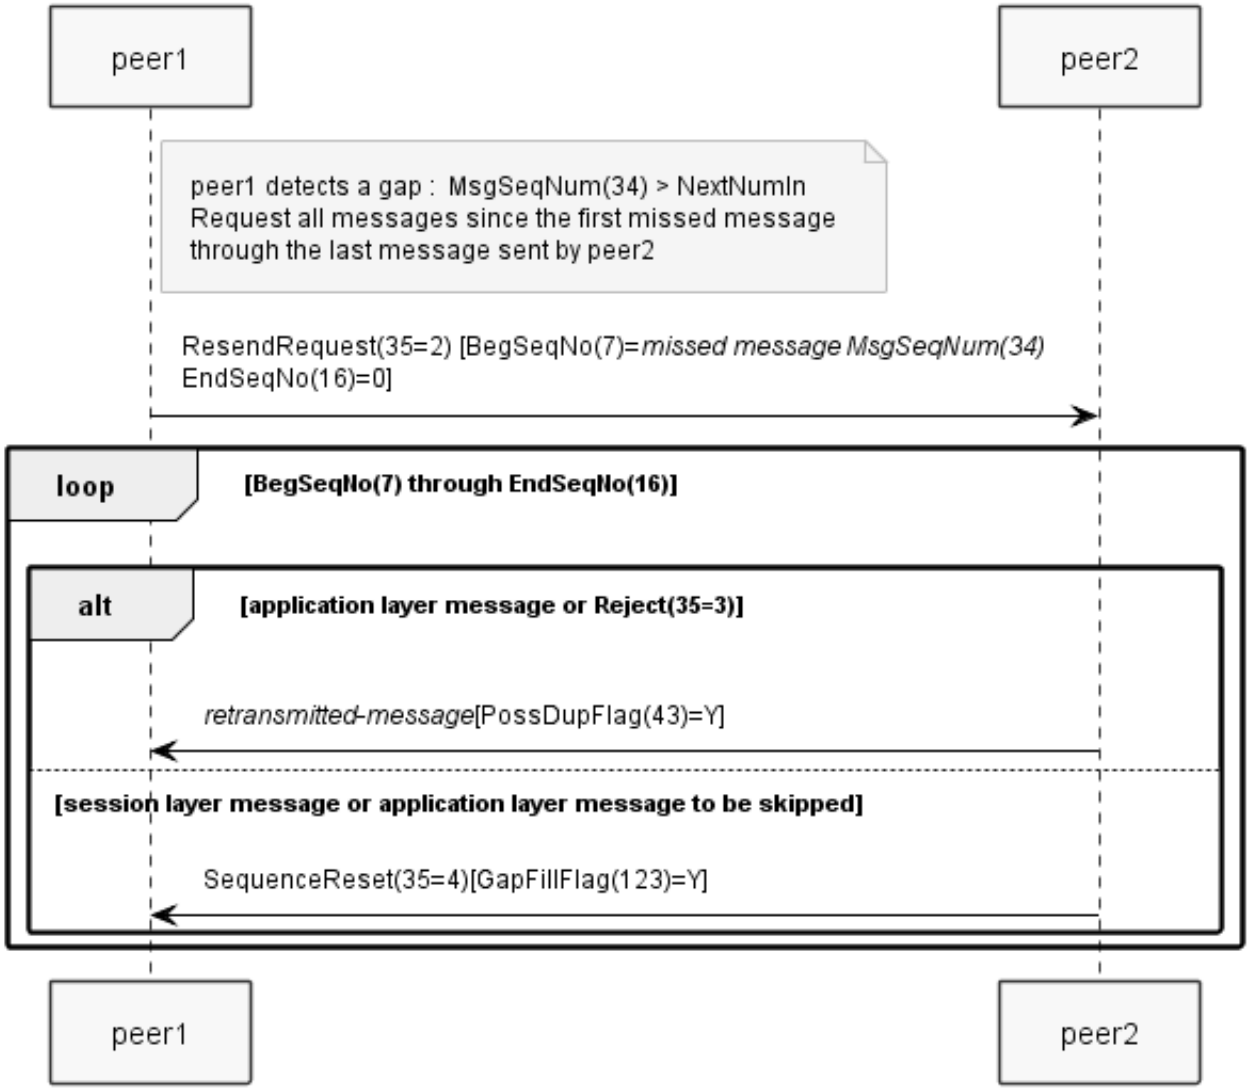

Figure 14 — ResendRequest(35=2) with gapfill processing

4.8.4 Possible duplicates

When a FIX session processor is unable to determine if a message was successfully received at its intended destination or when responding to a ResendRequest(35=2) message, a possible duplicate message is generated. The message will be a retransmission (with the same sequence number) of the application data in question with the PossDupFlag(43) included and set to "Y". It is the responsibility of the receiving firm to properly respond to the message with PossDupFlag(43) set to "Y" by determining if the message was previously processed.

Any message resent in response ResendRequest(35=2) message must contain the PossDupFlag(43) field set to "Y".

© Copyright, 2011-2020, FIX Protocol, Limited

Messages lacking the PossDupFlag(43) field or with the PossDupFlag(43) field set to "N" shall be treated as an original transmission.

The FIX session processor retransmitting a message with the PossDupFlag(43) set to "Y" must modify the following fields:

- SendingTime(52) set to the current sending time
- OrigSendingTime(122) set to the SendingTime(52) from the original message
- Recalculate the BodyLength(9)
- Recalculate the CheckSum(10)

If the message is encrypted, SecureDataLen(90) and SecureData(91) may also require re-encryption and re-encoding[12].

4.8.5 Gap fill process

The peer responding to a ResendRequest(35=2) message shall retransmit messages requested by the peer in message sequence number order, with the original sequence numbers and PossDupFlag(43) set to "Y".

The resender shall not retransmit the following session layer message types:

- Logon(35=A)
- Logout(35=5)
- ResendRequest(35=2)
- HeartBeat(35=0)
- TestRequest(35=1)
- SequenceReset(35=4)

The responding peer shall send a SequenceReset(35=4) message with GapFillFlag(123) set to "Y" (Gap Fill) for each session layer or application layer message not retransmitted.

Reject(35=3) and XMLnonFIX(35=n) are the only session messages which may be retransmitted.

The responding peer may choose, by counterparty agreement, not to retransmit all application messages. The definition of which application messages are retransmitted is defined in the application layer.

A continuous sequence of messages not being retransmitted should be skipped over using a single SequenceReset(35=4) message with GapFillFlag(123) set to "Y" and MsgSeqNum(34) set to the sequence number of the first skipped message and NewSeqNo(36) set to the next sequence number after the sequence number of the last message to be skipped (or "gap filled over").

NewSeqNo(36) must always be set to the value of the next sequence number to be expected by the peer immediately following the messages being skipped.

The SequenceReset(35=4) message with GapFillFlag(123) set to "Y" (Gap Fill) may also be used to skip application messages that the sender chooses not to retransmit (for example, aged orders).

4.8.5.1 Example using SequenceReset(35=4) to gap fill over multiple messages

The following example is provided to show how SequenceReset(35=4) should be used to gap fill over messages in response to a ResendRequest(35=2).

In this example a ResendRequest(35=2) is received with BeginSeqNo(7) set to 5 and EndSeqNo(16) set to 0 (meaning all subsequent messages following 5). Messages with MsgSeqNum(34) equal to 8, 10, 11 are application messages. Messages 5-7 and 9 are session layer messages. Only messages 8, 10, and 11 should be retransmitted.

[12] The use of SecureData(91) and its associated length field SecureDataLen(90) were deprecated with the introduction of the FIXT.1.1 Session Layer specification. The use of application layer encryption is still supported by counterparty agreement.

© Copyright, 2011-2020, FIX Protocol, Limited

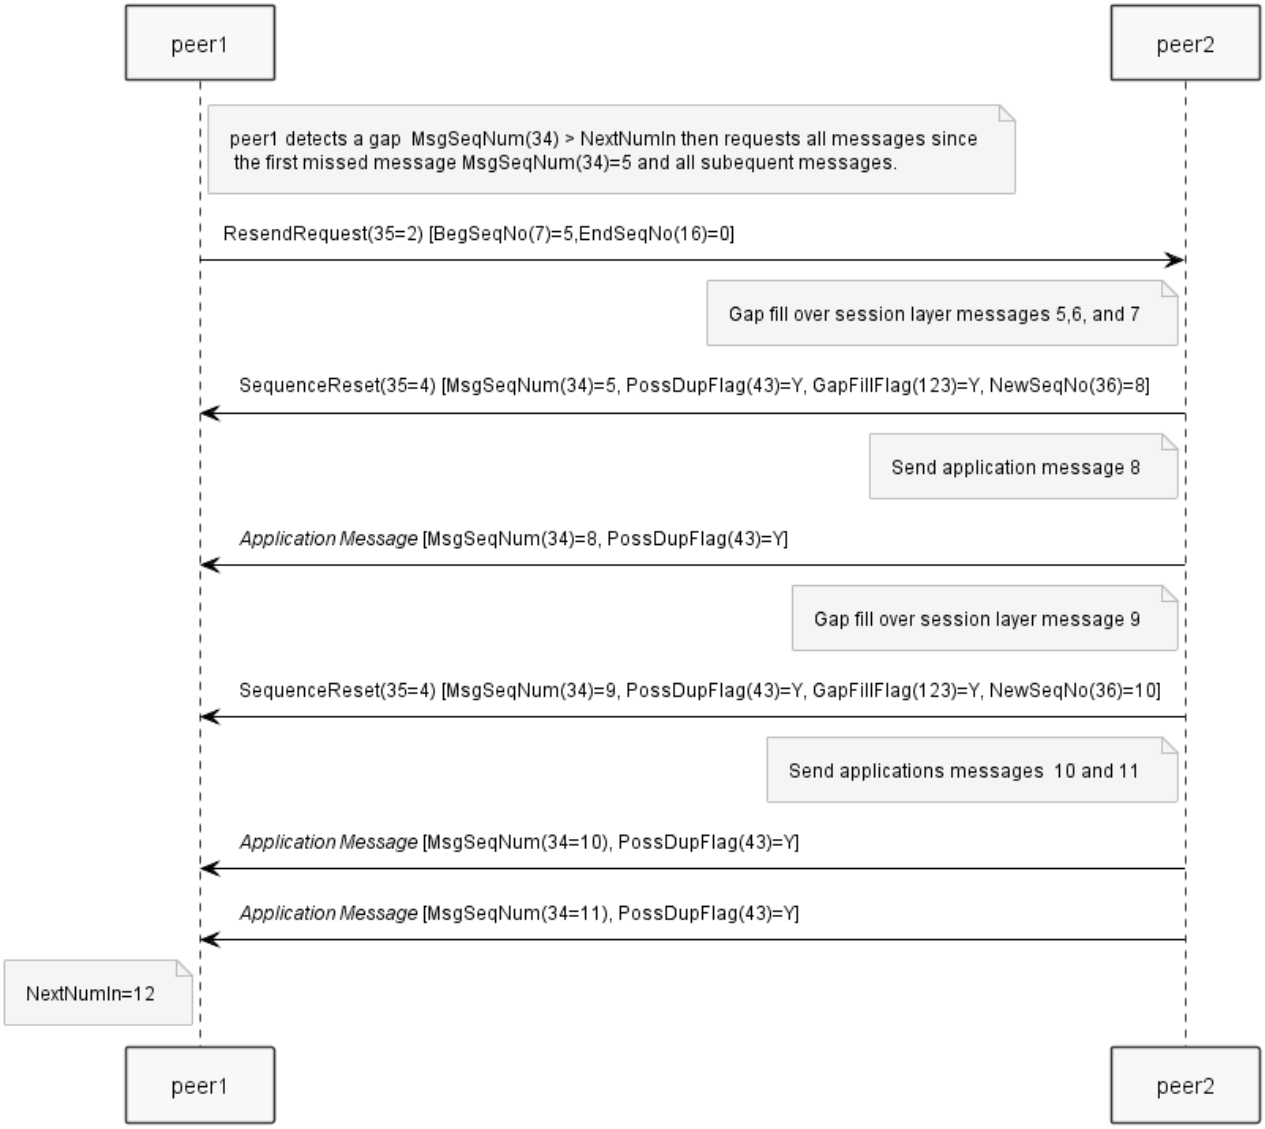

Figure 15 — Example using the SequenceReset(35=4) to gap fill over multiple messages.

4.8.6 Sequence reset

A FIX session processor may send a SequenceReset(35=4) message with GapFillFlag(123) set to “N” (Reset) and PossDupFlag(43) set to “Y” to force sequence number synchronization in the peer.

The firm sending the SequenceReset(35=4) with GapFillFlag(123) set to “N” is responsible for the results that occur at the application layer caused by resetting the sequence number and not retransmitting messages requested to be resent by the peer.

© Copyright, 2011-2020, FIX Protocol, Limited

Figure 16 — Performing a sequence reset instead of gap fill in response to a ResendRequest(35=2)

4.8.7 Processing inbound possible duplicate messages (PossDup(43) set to "Y")

All FIX implementations must monitor incoming messages to detect inadvertently retransmitted session layer messages (PossDupFlag(43) set to "Y", indicating a retransmission).

A FIX session processor, upon receipt of an inadvertently (or improperly) retransmitted session layer message as identified by the PossDupFlag(43) set to "Y", should perform sequence number processing (increment NextNumIn) only and avoid processing the session layer message.

A message received with the PossDupFlag(43) set to "Y" should be ignored when a message with the same MsgSeqNum(34) was previously processed.

4.8.8 Processing gaps when receiving FIX session layer messages

Gaps detected in message sequence numbers must be processed differently for certain FIX session layer messages. The table below lists the actions to be taken when the incoming FIX session layer message has a MsgSeqNum(34) that is greater than NextNumIn.

Table 3 — Response by message type

Message type received	Action to be taken on sequence number mismatch MsgSeqNum(34) > NextNumIn
Logon(35=A)	Must always be the first message transmitted. Authenticate and accept the connection. After sending a Logon(35=A) acknowledgement, send a ResendRequest(35=2) message.
Logout(35=5) request	Send ResendRequest(35=2) message requesting missing messages, receive and process retransmission of missing messages and gap fills, then send the Logout(35=5) acknowledgement message which serves as a confirmation of the Logout request. **DO**

© Copyright, 2011-2020, FIX Protocol, Limited

Message type received	Action to be taken on sequence number mismatch MsgSeqNum(34) > NextNumIn
	NOT terminate the session. The Logout(35=5) requestor should the terminate the transport layer connection. The only exception to the "do not terminate the session" rule is for an invalid Logon(35=5) request. The session acceptor has the right to send a Logout(35=5) message and terminate the transport layer connection immediately. This minimizes the threat of unauthorized connection attempts.
ResendRequest(35=2)	Perform the requested retransmssion then send a ResendRequest(35=2) message requesting missing messages, receive and process the retransmission of missing messages and gap fills.
SequenceReset(35=4) (GapFillFlag(123)=N)	Reset: Ignore the incoming sequence number. The NewSeqNo(36) field of this message will contain the sequence number of the next message to be transmitted.
SequenceReset(35=4) (GapFillFlag(123)=Y)	Gap Fill: Send a ResendRequest(35=2). These messages behave similarly to SequenceReset(35=4) messages with GapFillFlag(123) set to "N". However, it is important to ensure that no messages have been inadvertently skipped over. This means that these messages must be received in sequence. An out of sequence SequenceReset(35=4) message with GapFillFlag(123) set to "Y" is an abnormal condition.
All other messages	Perform gap fill operations.

4.9 Resending an unacknowledged application message

The application layer is responsible for the detection and proper handling of duplicate application messages.

The FIX session layer does not initiate a resend of an applcation message nor does the FIX session layer detect duplication application messages.

The application layer may resend a message if it has not received an application layer acknowledgement for that message.

The amount of time allowed to elapse before resending the message may be specified by counterparty agreement in a rules of engagement.

The application layer may use the PossResend(97) set to "Y" field in the StandardHeader component along with other fields in an application message to identify duplication application messages.

The use or non-use of the PossResend(97) field when resending application messages should be documented in the rules of engagement.

The resent application layer message shall consume the next value of NextNumOut resulting in a new MsgSeqNum(34) for the application message.

The FIX session processor shall treat the resent message as a new message.

The FIX session processor must pass the PossResend(97) field to the application layer when it is present in an application message.

The use of a globally unique persistent identifier that enforces idempotent behavior at the application layer may be used as an alternative to sending a PossResend(97) field by counterparty agreement.

© Copyright, 2011-2020, FIX Protocol, Limited

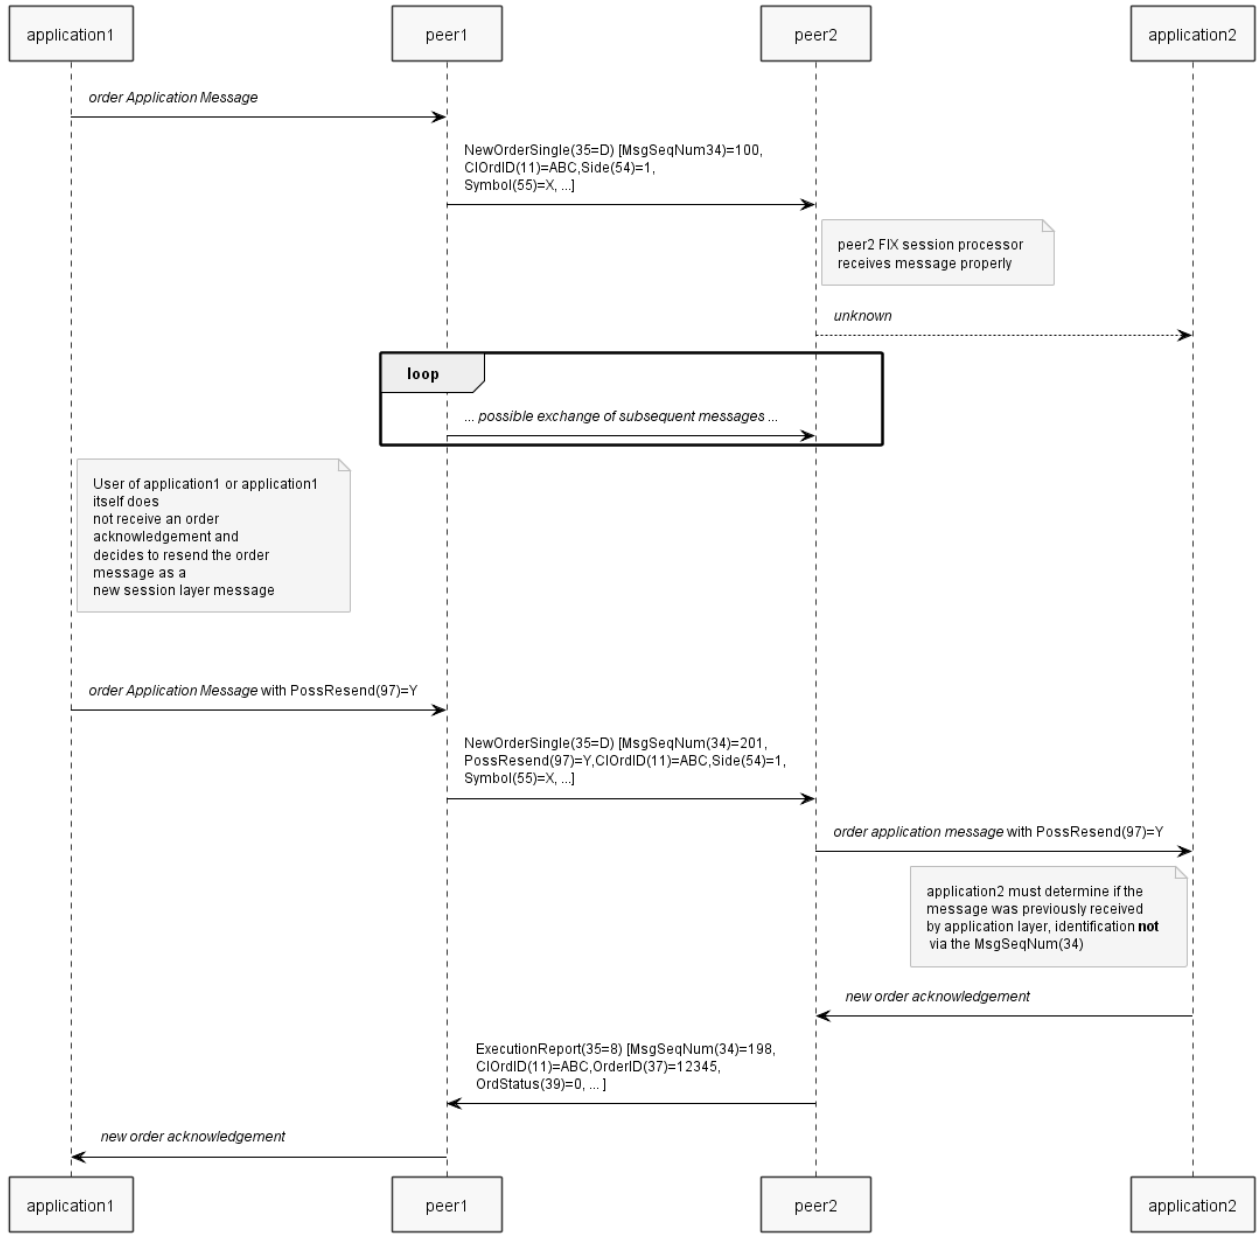

Figure 17 — Application layer resend using PossResend(97)

4.9.1 The difference between application layer resend and session layer retransmission

The purpose of the following diagram is to visually show the difference between an application using the PossResend(97) value of a previously unacknowledged application message and a FIX session processor retransmitting messages that may not have been received by its peer as a response to a ResendRequest(35=2) message from that peer.

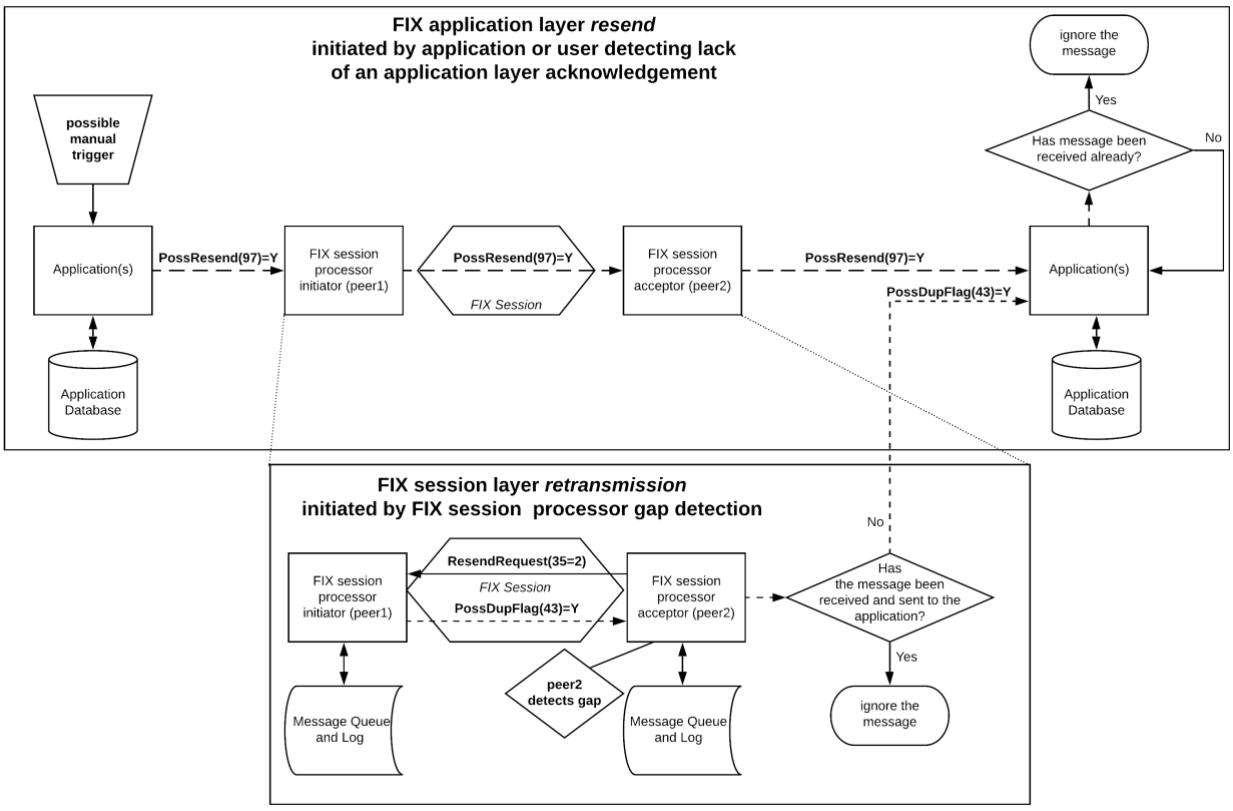

Figure 18 — The difference between application layer resend and session layer retransmission

4.10 FIX session state matrix

Precedence	State	Initiator	Acceptor	Description
1	Disconnected – No Connection Today	Y	Y	Currently disconnected, have not attempted to establish a connection “today”, and no MsgSeqNum(34) has been consumed (next connection “today” will start at MsgSeqNum(34) of 1).
2	Disconnected – Connection Today	Y	Y	Currently disconnected, have attempted to establish a connection “today” and thus MsgSeqNum(34)has been consumed (next connection “today” will start at MsgSeqNum(34) of (last + 1)).
3	Detect Broken Network Connection	Y	Y	While connected, detect a broken network connection (e.g. TCP socket closed). Disconnect the network connection and “shutdown” configuration for this session.
4	Awaiting Connection	N	Y	Session acceptor Logon awaiting network connection from counterparty.
5	Initiate Connection	Y	N	Session initiator Logon establishing network connection with counterparty.
6	Network Connection Established	Y	Y	Network connection established between both parties.
7	Initiation Logon(35=A)	Y	N	Session initiator Logon send Logon(35=A) message.

© Copyright, 2011-2020, FIX Protocol, Limited

Precedence	State	Initiator	Acceptor	Description
	Sent			*** Exception: 24hr sessions.
8	Initiation Logon(35=A) Received	N	Y	Session acceptor Logon receive counterparty's Logon(35=A) message. *** Exception: 24hr sessions.
9	Initiation Logon(35=A) Response	N	Y	Session acceptor Logon respond to counterparty's Logon(35=A) message with Logon(35=A) message to handshake.
10	Handle ResendRequest(35=2)	Y	Y	Receive and respond to counterparty's ResendRequest(35=2) sending requested messages and/or SequenceReset(35=4) Gap Fill messages for the range of MsgSeqNum(34) requested. Updated to include rejecting ResendRequest(35=2) received with MsgSeqNum(34) that is <= LastSeqNum processed.
11	Receive MsgSeqNum(34) Too High	Y	Y	Receive too high of MsgSeqNum(34) from counterparty, queue message, and send ResendRequest(35=2).
12	Awaiting/ Processing Response to ResendRequest(35=2)	Y	Y	Process requested MsgSeqNum(34) with PossDupFlag(43)=Y resent messages and/or SequenceReset(35=4) Gap Fill messages from counterparty. Queue incoming messages with MsgSeqNum(34) too high.
13	No messages received in Interval	Y	Y	No inbound messages (non-garbled) received in (HeartBtInt(108) + "reasonable period of time"), send TestRequest(35=1).
14	Awaiting/ Processing Response to TestRequest(35=1)	Y	Y	Process inbound messages. Reset heartbeat interval-related timer when ANY inbound message (non-garbled) is received.
15	Receive Logout(35=5) message	Y	Y	Receive Logout(35=5) message from counterparty initiating logout/disconnect. If MsgSeqNum(34) too high, send ResendRequest(35=2). If sent, wait a reasonable period of time for complete response to ResendRequest(35=2). Note that depending upon the reason for the Logout(35=5), the counterparty may be unable to fulfill the request. Send Logout(35=5) message as response and wait a reasonable period of time for counterparty to disconnect the network connection. Note that counterparty may send a ResendRequest(35=2) message if Logout(35=5) message response has MsgSeqNum(34) too high and then re-initiate the Logout(35=5) process.
16	Initiate Logout(35=5) Process	Y	Y	Identify condition or reason to gracefully disconnect (e.g. end of "day", no response after multiple TestRequest(35=1) messages, too low MsgSeqNum(34), etc.). Send Logout(35=5) message to counterparty. Wait a reasonable period of time for Logout(35=5) response. During this time, handle "new" inbound messages and/or ResendRequest(35=2) messages if possible. Note that

© Copyright, 2011-2020, FIX Protocol, Limited

Precedence	State	Initiator	Acceptor	Description
				some logout/termination conditions (e.g. loss of database/message safe-store) may require immediate termination of the network connection following the initial send of the Logout(35=5) message. Disconnect the network connection and "shutdown" configuration for this session.
17	Active/Normal Session	Y	Y	Network connection established, Logon(35=A) message exchange successfully completed, inbound and outbound MsgSeqNum(34) are in sequence as expected, and HeartBeat(35=0) or other messages are received within (HeartBtInt(108) + "reasonable period of time").
18	Waiting for a Logon(35=A)	Y	N	Session initiator waiting for session acceptor to send back a Logon(35=A) acknowledgement.

4.10.1 FIX logon process state transition diagram

Session Initiator (e.g. buyside) Action	Session Acceptor (e.g. sellside) Action	Session Initiator (e.g. buyside) State	Session Acceptor (e.g. sellside) State
Start		Disconnected – No Connection Today	Awaiting Connection
		Disconnected – Connection Today	
Connect		Initiate Connection	Awaiting Connection
		(Possible) Detect Broken Network Connection	
	Accept Connection	Network Connection Established	Network Connection Established
Initiate Logon(35=A)		Initiation Logon(35=A) Sent	Network Connection Established
	Receive Initiation Logon(35=A)	Initiation Logon(35=A) Sent	Initiation Logon(35=A) Received
	Send Initiation Logon(35=A) Response	Initiation Logon(35=A) Sent	Initiation Logon(35=A) Response (Possible) Initiate Logout(35=5) Process (e.g. if MsgSeqNum(34) too low) (Possible) Receive MsgSeqNum(34) Too High
	(Possible) Send ResendRequest(35=2)		Initiation Logon(35=A) Response (Possible) Receive MsgSeqNum(34) Too High

© Copyright, 2011-2020, FIX Protocol, Limited

Session Initiator (e.g. buyside) **Action**	**Session Acceptor (e.g. sellside)** **Action**	**Session Initiator (e.g. buyside)** **State**	**Session Acceptor (e.g. sellside)** **State**
Receive Initiation Logon(35=A) Response		(Possible) Active/Normal Session (Possible) Initiate Logout(35=5) Process (e.g. if MsgSeqNum(34) too low)	Initiation Logon(35=A) Response
(Possible) Send ResendRequest(35=2)		(Possible) Active/Normal Session (Possible) Receive MsgSeqNum(34) Too High	(Possible) Active/Normal Session (Possible) Handle ResendRequest(35=2)
		Active/Normal Session	Active/Normal Session

4.10.2 FIX logout process state transition diagram

Logout Initiator Action	**Logout Acceptor Action**	**Logout Initiator State**	**Logout Acceptor State**
Start		Active/ Normal Session	Active/Normal Session
		No Messages Received in Interval	No Messages Received in Interval
		Awaiting/ Processing Response to TestRequest(35=1)	- Initiation Logon(35=A) Sent - Awaiting/Processing Response to TestRequest(35=1) - Awaiting validation of logon - Receive MsgSeqNum(34) Too High - Awaiting/Processing Response to ResendRequest(35=2) - Initiate Logout(35=5) Process - Waiting for a Logon(35=A) acknowledgement
Send Logout(35=5) Request		Logout Pending	
	Receive Logout(35=5) Request	Logout Pending	Logout Pending (Possible) Receive MsgSeqNum(34) Too High
	Send Logout(35=5) Response	Logout Pending	Awaiting Disconnect
	(Possible) Send ResendRequest(35=2)	Logout Pending	(Possible) Awaiting / Processing Response to

© Copyright, 2011-2020, FIX Protocol, Limited

Logout Initiator Action	Logout Acceptor Action	Logout Initiator State	Logout Acceptor State
			ResendRequest(35=2)
(Possible) Receive ResendRequest(35=2)		(Possible) Awaiting / Processing Response to ResendRequest(35=2)	(Possible) Awaiting Response to ResendRequest(35=2)
Receive Logout(35=5) Response		Disconnected – Connection Today	Awaiting Disconnect
Disconnect		Disconnected – Connection Today	Disconnected – Connection Today

© Copyright, 2011-2020, FIX Protocol, Limited

5 FIX session profiles

The following session profiles are defined within the standard. Each session profile defines a standardized use of the FIX session layer for a specific context primarily related to application version usage.

5.1 FIX.4.2 session profile

FIX.4.2 is the FIX session profile that is used with the FIX 4.2 application layer. The FIX 4.2 application layer may use fields from subsequent versions of FIX.

The FIX.4.2 session profile may use extended features from the FIX session standard by counterparty agreement.

5.1.1 Profile identification

The value of BeginString(8) must be “FIX.4.2”

5.1.2 Application version identification

Field	Definition
DefaultApplVerID(1137)	Not used with FIX.4.2 session profile as FIX 4.2 is the mandatory application layer.
DefaultApplExtID(1407)	May be used by counterparty agreement in-band. Recommendation is to communicate this information out-of-band via a rules of engagement, possibly by using a FIX Orchestra rules of engagement.
DefaultCstmApplVerID(1408)	May be used by counterparty agreement in-band on the Logon(35=A) message to identify the version of the custom application or FIX Orchestra rules of engagement.

5.2 FIX4 session profile

FIX4 is fully backward compatible with the FIX 4.4 session layer as defined in Volume 2 of the FIX 4.4 specification.

FIX4 adopters may use extended capabilities beyond the basic FIX 4.4 functionality by counterparty agreement.

The FIX4 session profile supports the communication of a single version of the FIX application layer.

5.2.1 Profile identification

The value of BeginString(8) must be “FIX.4.4”

5.2.2 Application version identification

The default FIX application version is *FIX Latest*.

Field	Definition
DefaultApplVerID(1137)	DefaultApplVerID(1137) may be used to specify the application version in the Logon(35=A) message. If the DefaultApplVerID(1137) is not specified the default will be assumed to be *FIX Latest*.
DegaultApplExtID(1407)	May be used by counterparty agreement in-band. Recommendation is to communicate this information out-of-band via a rules of engagement possibly by using a FIX Orchestra rules of engagement.
DefaultCstmApplVerID(1408)	May be used by counterparty agreement in-band on the Logon(35=A) message to identify the custom application or FIX Orchestra rules of engagement.

© Copyright, 2011-2020, FIX Protocol, Limited

5.3 FIXT session profile

FIXT supports transmitting messages from multiple application versions over the same session layer. This capability is the primary differentiator between the FIX4 session profile and FIXT session profile. FIXT may be used with a single application version, such as *FIX Latest*. The benefit in using FIXT for a single application version is it provides an option to include additional application versions at the individual message level at a future time.

5.3.1 Profile identification

The value of BeginString(8) must be “FIXT.1.1”.

5.3.2 Multiple application version support over a single FIXT session

The FIXT session profile (along with the LFIXT session profile based upon FIXT) permit application messages from different application versions of FIX to be used over a single FIX session. The benefit is to broaden service offerings, perform incremental enhancements at the individual message or message category level.

5.3.3 Session default application version identification

The session default application version must be present in DefaultApplVerID(1137) in the Logon(35=A) message.

The application version may be overridden by specifying the application version explicitly by specifying the ApplVerID(1128) in the StandardHeader component of any application message by counterparty agreement.

Field	Definition
DefaultApplVerID(1137)	DefaultApplVerID(1137) must be specified on the Logon(35=A) message.
DegaultApplExtID(1407)	May be used by counterparty agreement in-band. Recommendation is to communicate this information out-of-band via a rules of engagement possibly by using a FIX Orchestra rules of engagement.
DefaultCstmApplVerID(1408)	May be used by counterparty agreement in-band on the Logon(35=A) message to identify the custom application or FIX Orchestra rules of engagement.

5.3.4 Message type default application version

FIXT expands upon the ability to specify an application version on the Logon(35=A) message by allowing different application versions to be specified by message type in the MsgTypeGrp component.

The MsgTypeGrp component may be used to specify what application messages are supported over the FIX session being initiated.

Within the MsgTypeGrp component, a FIX session may specify a message type default application version on the Logon(35=A) message. For each message type where the default application version is different from the session default application version, the message type default application version is specified using the RefMsgType(372) field to specify the message type, the RefApplVerID(1130) field to specify the application version, and the DefaultVerIndicator(1410) field to indicate if RefApplVerID(1130) is the default.

When present, the RefApplVerID(1130) in the RefMsgTypeGrp component has precedence over the session default application version specified in the DefaultApplVerID(1137) field of the Logon(35=A) message.

5.3.5 Explicit application version per message

The application version may be specified on a message instance using the ApplVerID(1128) field from the standard header.

The explicit application version only applies to the message instance in which it is sent, default application versions remain unaltered.

The explicit application version has precedence over the message type default application version and the session default application version.

FIX session processors must maintain state information regarding the default application version used during the FIX session.

© Copyright, 2011-2020, FIX Protocol, Limited

Table 4 — Application version precedence

Application version	Fields	Precedence
Session default	DefaultApplVerID(1137)	Lowest level of precedence.
Message type default	RefMsgType(372), RefApplVerID(1130), DefaultVerIndicator(1410)	Supersedes the session default application version.
Explicit	ApplVerID(1128)	Highest precedence over default application versions. Only applies to the message instance in which ApplVerID(1128) is present.

5.3.6 Use of extension packs

A FIX session may specify a default extension pack as part of the session default application version by inclusion of a valid extension pack number in the DefaultApplExtID(1407).

An extension pack can be specified for a specific message type using the RefApplExtID(1406) field within the MsgTypeGrp component. If provided, RefApplExtID(1406) becomes part of the message type default application version.

A message instance can explicitly include an extension pack in the ApplExtID(1156) field. If ApplExtID(1156) is specified it becomes part of the explicit application version.

An extension pack is considered incompatible with the application version if the extension pack number specified is less than the last extension pack that was used to create the application version.

Table 5 — Extension pack precedence

EP version	Fields	Precedence
Session default	DefaultApplExtID(1407)	Lowest level of precedence.
Message type default	RefMsgType(372), RefApplExtID(1406), DefaultVerIndicator(1410)	Supersedes the session default extension pack.
Explicit	ApplExtID(1156)	Highest precedence over default extension pack. Only applies to the message instance in which ApplExtID(1156) is present.

5.3.7 Use of a custom application version

A default custom application version may be specified in-band over a FIX session by inclusion of a user defined value in DefaultCstmApplVerID(1408) on the Logon(35=A) message.

A custom application version can be specified for a specific message type using the RefCStmApplVerID(1131) field within the MsgTypeGrp component. If provided, RefCStmApplVerID(1131) becomes part of the message type default application version.

A message instance can explicitly include a custom application version in the CstmApplVerID(1129) field. If CstmApplVerID(1129) is specified it becomes part of the explicit application version.

Table 6 — Custom application version precedence

EP version	Fields	Precedence
Session default	DefaultCstmApplVerID(1408)	Lowest level of precedence.
Message type default	RefMsgType(372), RefCStmApplVerID(1131), DefaultVerIndicator(1410)	Supersedes the session default custom application version.

© Copyright, 2011-2020, FIX Protocol, Limited

EP version	Fields	Precedence
Explicit	CstmApplVerID(1129)	Highest precedence over default custom application versions. Only applies to the message instance in which the CstmApplVerID(1129) is present.

5.4 Lightweight FIXT (LFIXT session profile)

The Lightweight FIXT session profile (LFIXT) is a restriction of the FIXT session profile. LFIXT eliminates the use of session layer retransmission of messages to simplify the session layer protocol.

LFIXT defines two different modes of operation. Under *LFIXT compatible mode*, LFIXT peer is interoperable with existing FIX session processors that support the FIXT session profile. Under *LFIXT succinct mode*, LFIXT peer is no longer interoperable with FIXT peer, but the complexity of the session layer protocol is cut down further.

5.4.1 Profile identification

The value of BeginString(8) must be “FIXT.1.1”.

LFIXT shares the BeginString(8) value with the FIXT session profile in order to support its communication with the FIXT peer under the *LFIXT compatible mode*.

5.4.2 Application version identification

The LFIXT session profile follows the same application version identification rules as the FIXT session profile.

5.4.3 LFIXT transport layer requirements

LFIXT does not support retransmission of messages at the session layer and relies on the application layer to provide retransmission services during the FIX session when needed.

For LFIXT a FIX session exists over one FIX connection which exists over one transport layer. A loss of either the FIX connection or the transport layer connection constitutes the end of a FIX session.

Each establishment of a FIX connection creates a new FIX session, which means that NextNumIn is set to 1 and the NextNumOut is set to 1 in the FIX session processor.

5.4.4 LFIXT compatible mode

When operating under *LFIXT compatible mode*, a FIXT peer shall handle all possible types of FIXT inbound session layer messages, but only send out session layer messages of limited types to enable a seamless communication between the LFIXT peer and the FIXT peer. An LFIXT peer is compatible with its FIXT peer in this sense.

Similarly, two LFIXT peers have the ability to communicate with each other seamlessly when both operating under the *LFIXT compatible mode*.

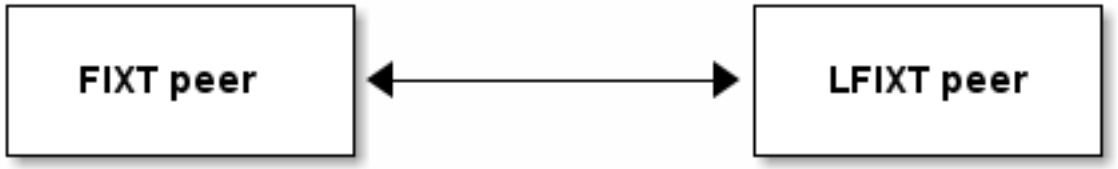

Figure 19 — FIXT peer connected to LFIXT peer operating under compatible mode

© Copyright, 2011-2020, FIX Protocol, Limited

Table 7 — Session layer messages when peer uses LFIXT session profile under compatible mode

Session Layer Message	Received from peer	Sent to peer
HeartBeat(35=0)	Yes	Yes
Logon(35=A)	Yes	Yes
TestRequest(35=1)	Yes	No
ResendRequest(35=4)	Yes	No
Reject(35=3)	Yes	Yes
SequenceReset(35=4) GapFillFlag(123)=N	Yes	Yes, but only passively
SequenceResest(35=4) GapFillFlag(123)=Y	Yes	No
Logout(35=5)	Yes	Yes

5.4.5 LFIXT succinct mode

When operating in *LFIXT succinct mode*, an LFIXT peer shall only accept a subset of inbound session layer message types and shall only transmit a subset of session layer message types. The complexity of the session layer protocol is reduced to a minimum in this way, while sacrificing the compatibility with FIXT peers.

Upon receiving an unexpected type of session layer message, an LFIXT peer operating under the *LFIXT succinct mode* shall terminate the connection by sending a Logout(35=5) with a description of the error in Text(58) and then terminate the transport layer connection.

Succinct mode shall only be used by an LFIXT peer when its counterparty is already known to be using the LFIXT session profile, e.g. by prior out-of-band exchange of the rules of engagement[13]. Its counterparty can operate under *LFIXT compatible mode* or under *LFIXT succinct mode*, but cannot be a FIXT peer (using the FIXT session profile) since the two peers are not compatible in this case.

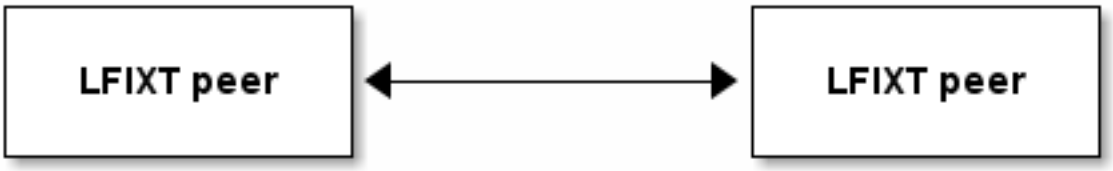

Figure 20 — LFIXT peer connected to LFIXT peer operating under succinct mode

Table 8 — Session layer messages when peer uses LFIXT session profile under succinct mode

Session Layer Message	Received from peer	Sent to peer
HeartBeat(35=0)	Yes	Yes
Logon(35=A)	Yes	Yes
Reject(35=3)	Yes	Yes
Logout(35=5)	Yes	Yes

[13] FIX Orchestra may be used to communicate which FIX session profile and which operating mode is being used for a FIX enabled service.

© Copyright, 2011-2020, FIX Protocol, Limited

5.4.6 LFIXT and FIXT operating mode interoperability

The following table shows the interoperability between LFIXT and FIXT peers for each operating mode of LFIXT.

Table 9 — Interoperability between LFIXT and FIXT peers by operating mode

Operating Mode	LFIXT acceptor using succinct mode	LFIXT acceptor using compatible mode	FIXT acceptor
LFIXT initiator using succinct mode	interoperable	interoperable	**not** interoperable
LFIXT initiator using compatible mode	interoperable	interoperable	interoperable
FIXT initiator	**not** interoperable	interoperable	interoperable

5.4.7 Validation of message sequence numbers

If a received message has a MsgSeqNum(34) less than NextNumIn, a serious error exists. The FIX session and transport layer connection should be terminated unless the message received is:

- a SequenceReset(35=4) message with PossDupFlag(43) present with a value of “Y”.
- any message of a message type that supports retransmission with a PossDupFlag(43) present with a value of “Y”.
- a Logon(35=A) message with ResetSeqNumFlag(141) present with a value of “Y”.

If a received message has a MsgSeqNum(34) greater than NextNumIn, a serious error exists. The FIX session and transport layer connection should be terminated.

5.4.8 Application layer recovery

The application layer shall be responsible for message recovery.

An LFIXT session processor must not perform message recovery.

5.4.9 LFIXT initiator connects to LFIXT acceptor

An LFIXT initiator shall send a Logon(35=A) message with the following fields present

Table 10 — LFIXT Logon(35=A) initiator

Field	Value
MsgSeqNum(34)	1
ResetSeqNumFlag(141)	Y
NextExpectedSeqNum(789)	1

In the following diagram shows the standard LFIXT logon process.

© Copyright, 2011-2020, FIX Protocol, Limited

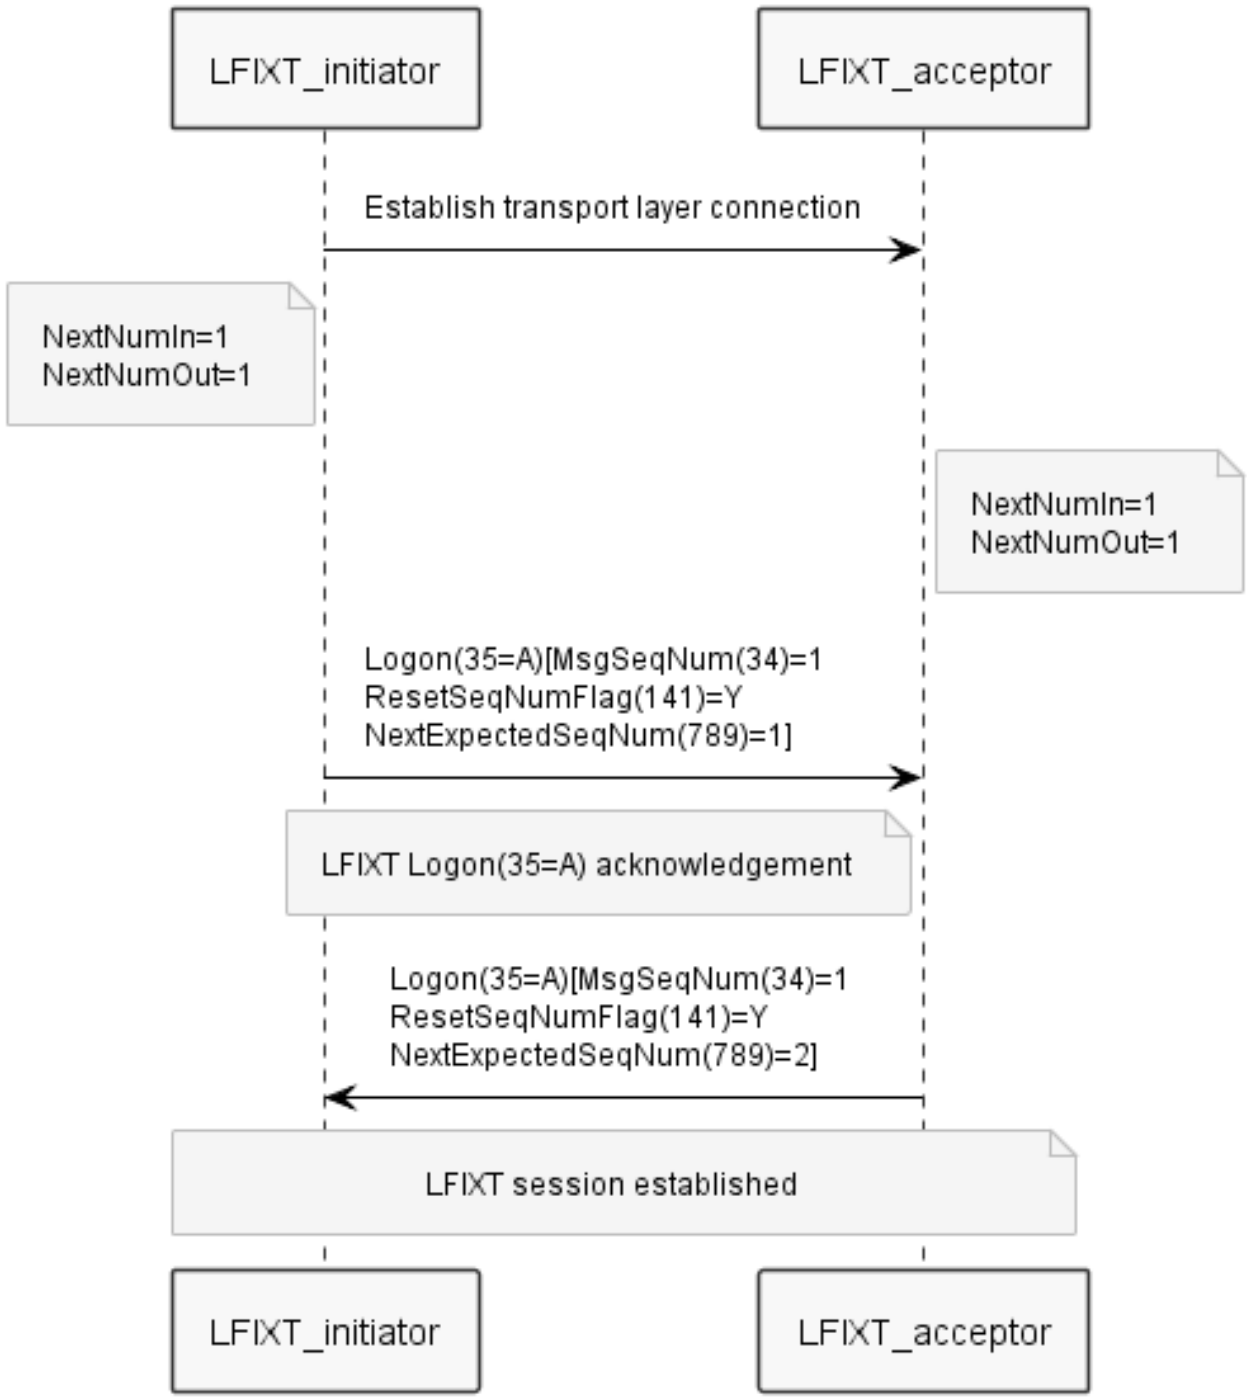

Figure 21 — LFIXT logon process

5.4.10 FIXT initiator connects to LFIXT acceptor (compatible mode)

A FIXT initiator that is able to persist message history shall send a Logon(35=A) message with the following fields present. Upon receiving the Logon(35=A) request, an LFIXT acceptor shall adjust its own NextNumOut to the NextExpectedMsgSeqNum(789) contained in the Logon(35=A) request.

Table 11 — FIXT Logon(35=A) initiator

Field	Value
MsgSeqNum(34)	1

© Copyright, 2011-2020, FIX Protocol, Limited

Field	Value
ResetSeqNumFlag(141)	N
NextExpectedSeqNum(789)	NextNumIn

In the following example, a FIXT initiator is establishing a new FIX connection to the LFIXT session. This example shows how the LFIXT acceptor adjusts its NextNumIn and NextNumOut values to the FIXT session state being maintained by a FIXT initiator.

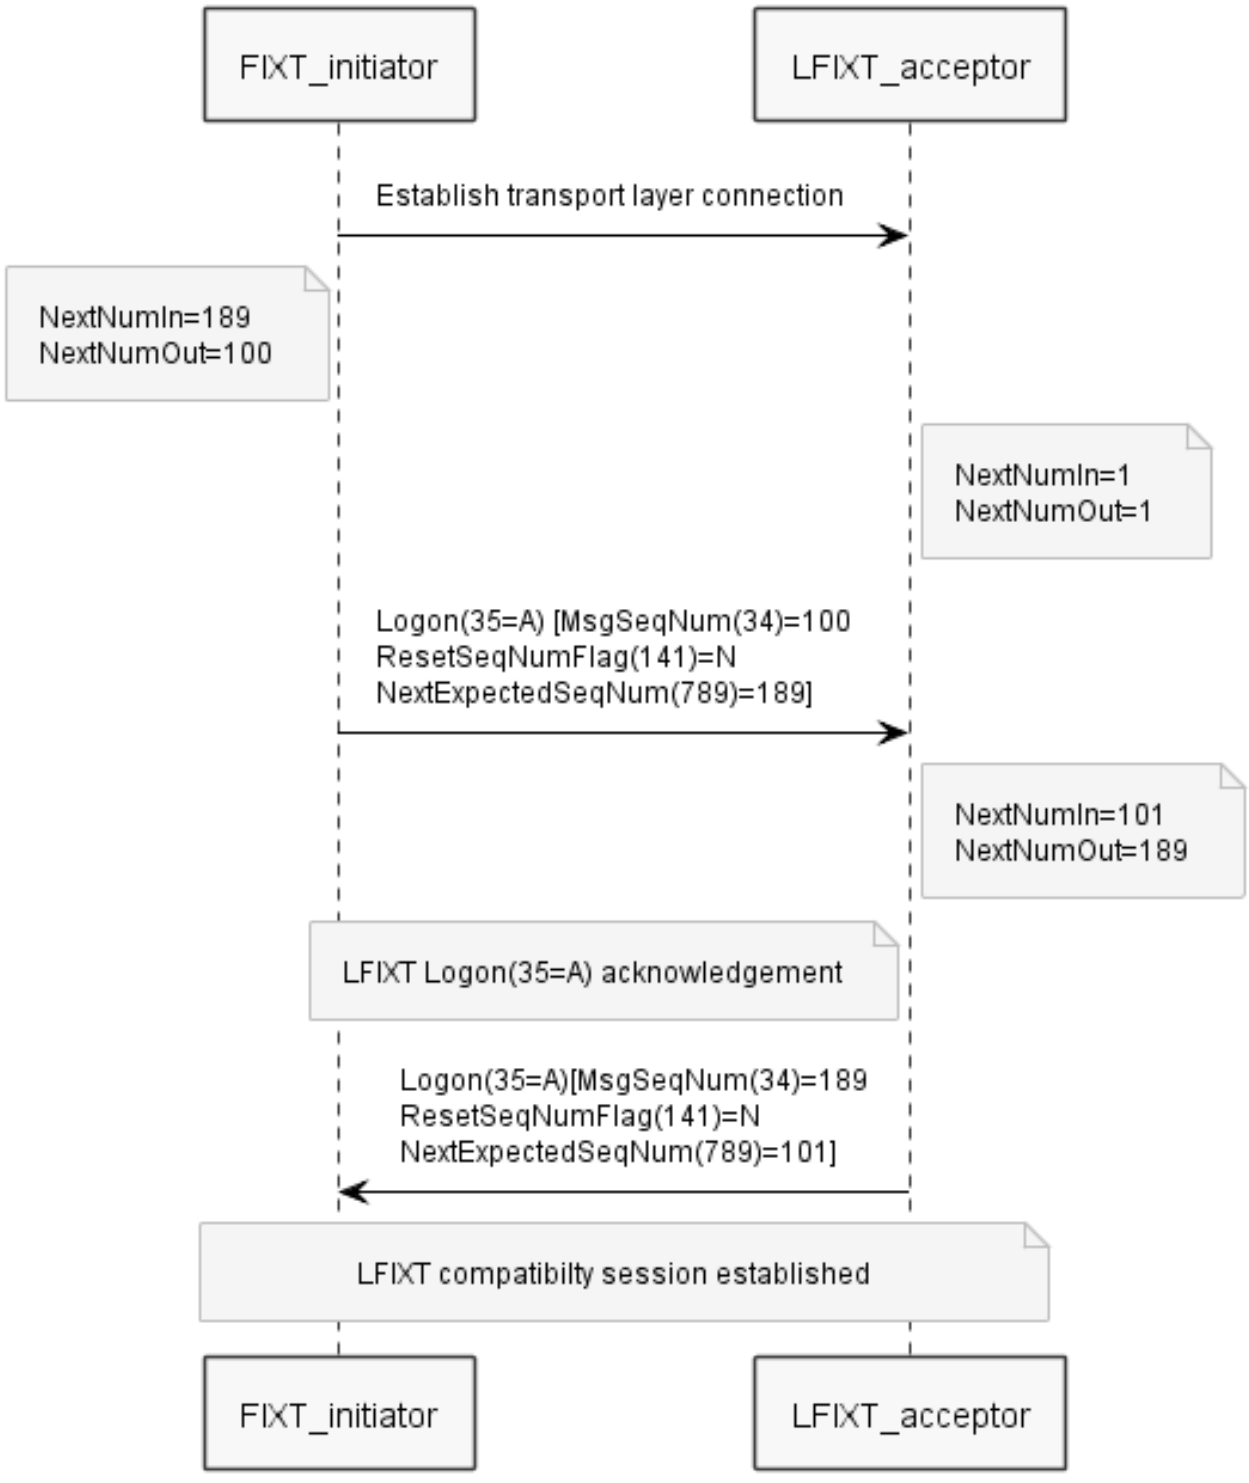

Figure 22 — FIXT initiator connecting to LFIXT acceptor in compatible mode logon

© Copyright, 2011-2020, FIX Protocol, Limited

In the following example, an LFIXT initiator is establishing a new FIX connection to the FIXT session. This example shows how the FIXT acceptor resets its NextNumIn and NextNumOut values when the LFIXT initiator sends the Logon(35=A) request.

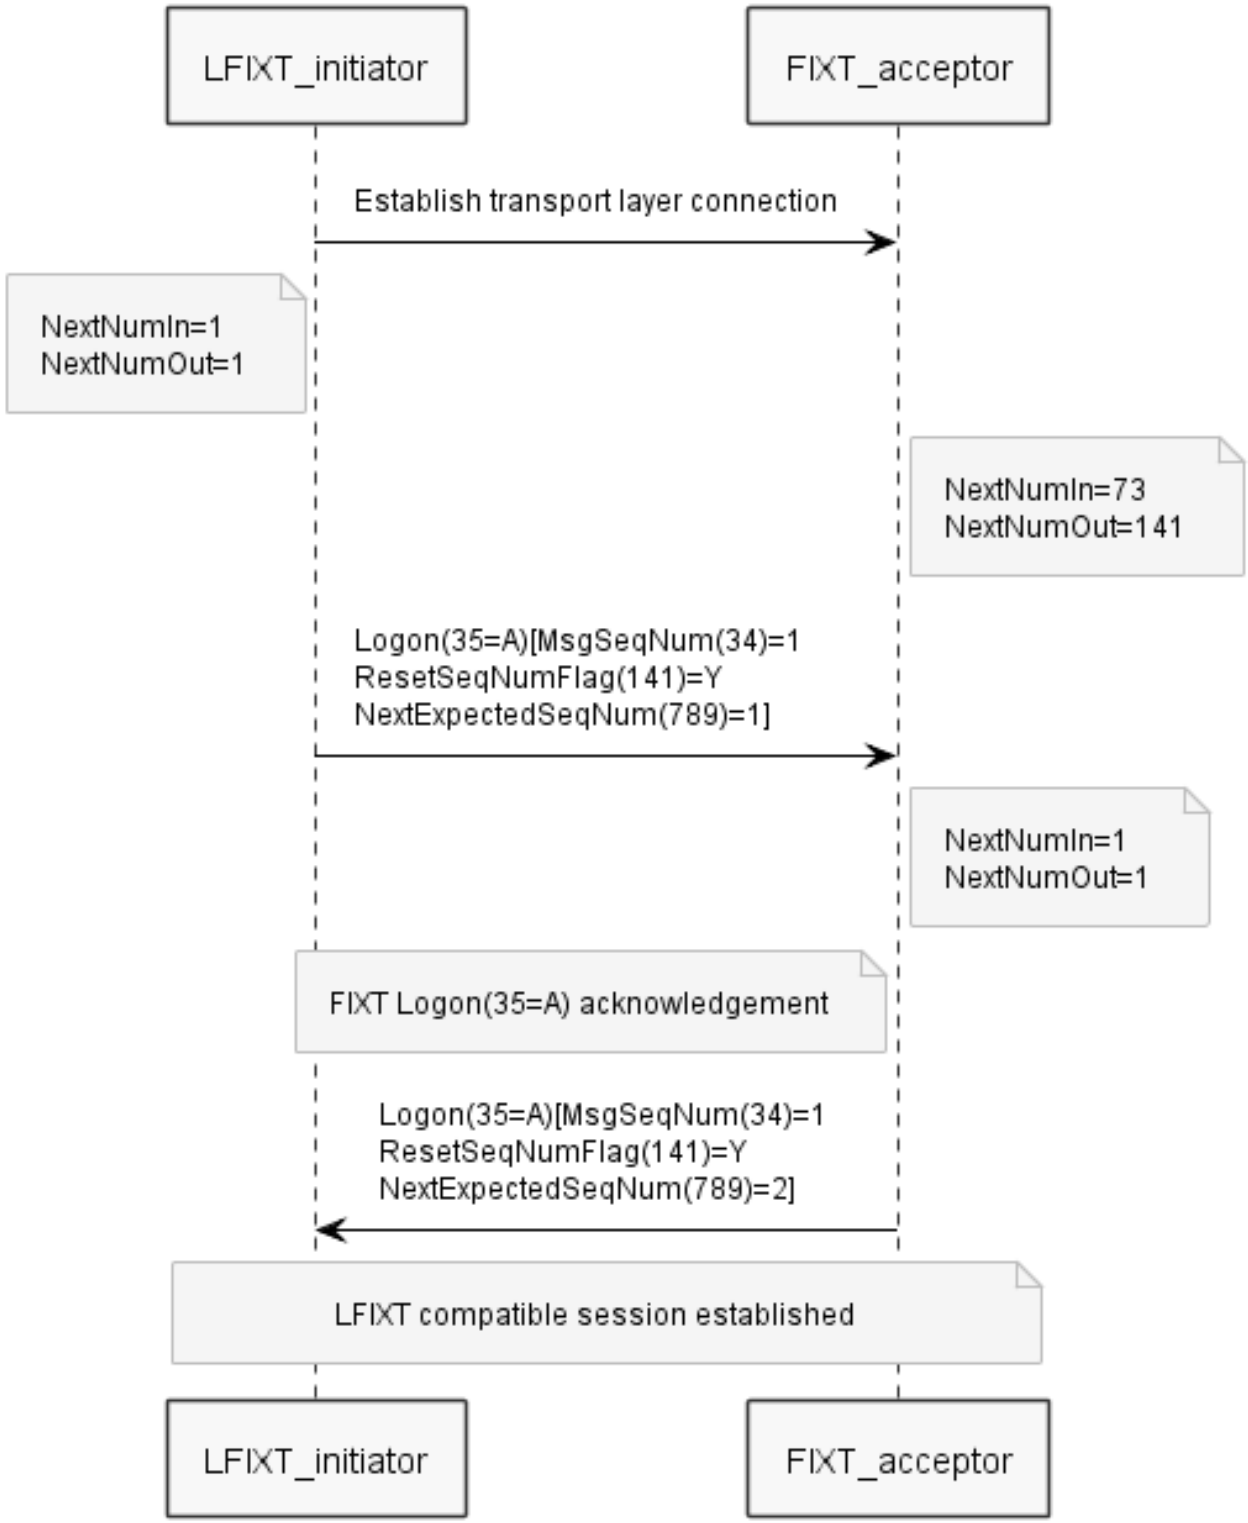

Figure 23 — LFIXT initiator connecting to FIXT acceptor in compatible mode logon

5.4.11 Receipt of ResendRequest(35=2) message from a FIXT peer

LFIXT peers are not expected to save outbound message history for retransmission.

© Copyright, 2011-2020, FIX Protocol, Limited

If a ResendRequest(35=2) message is received, the LFIXT peer shall respond with a SequenceReset(35=4) with the GapFillFlag(123) set to “N” and a NewSeqNo(36) = NextNumOut.

The following example shows a FIXT initiator connected to an LFIXT acceptor. The FIXT initiator does not process messages with MsgSeqNum(34)=98 and MsgSeqNum(34)=99 for some reason. As a result, the FIXT initiator transmits a ResendRequest(35=2) asking for messages 98 and 99. The LFIXT acceptor responds with a SequenceReset(35=4) message with GapFillFlag(123) set to “N” and the NewSeqNo(36) set to the maximum of the EndSeqNo(16) from the ResendRequest(35=2) message and the LFIXT acceptor NextNumOut. This example demonstrates that an LFIXT session does not provide session layer message recovery.

© Copyright, 2011-2020, FIX Protocol, Limited

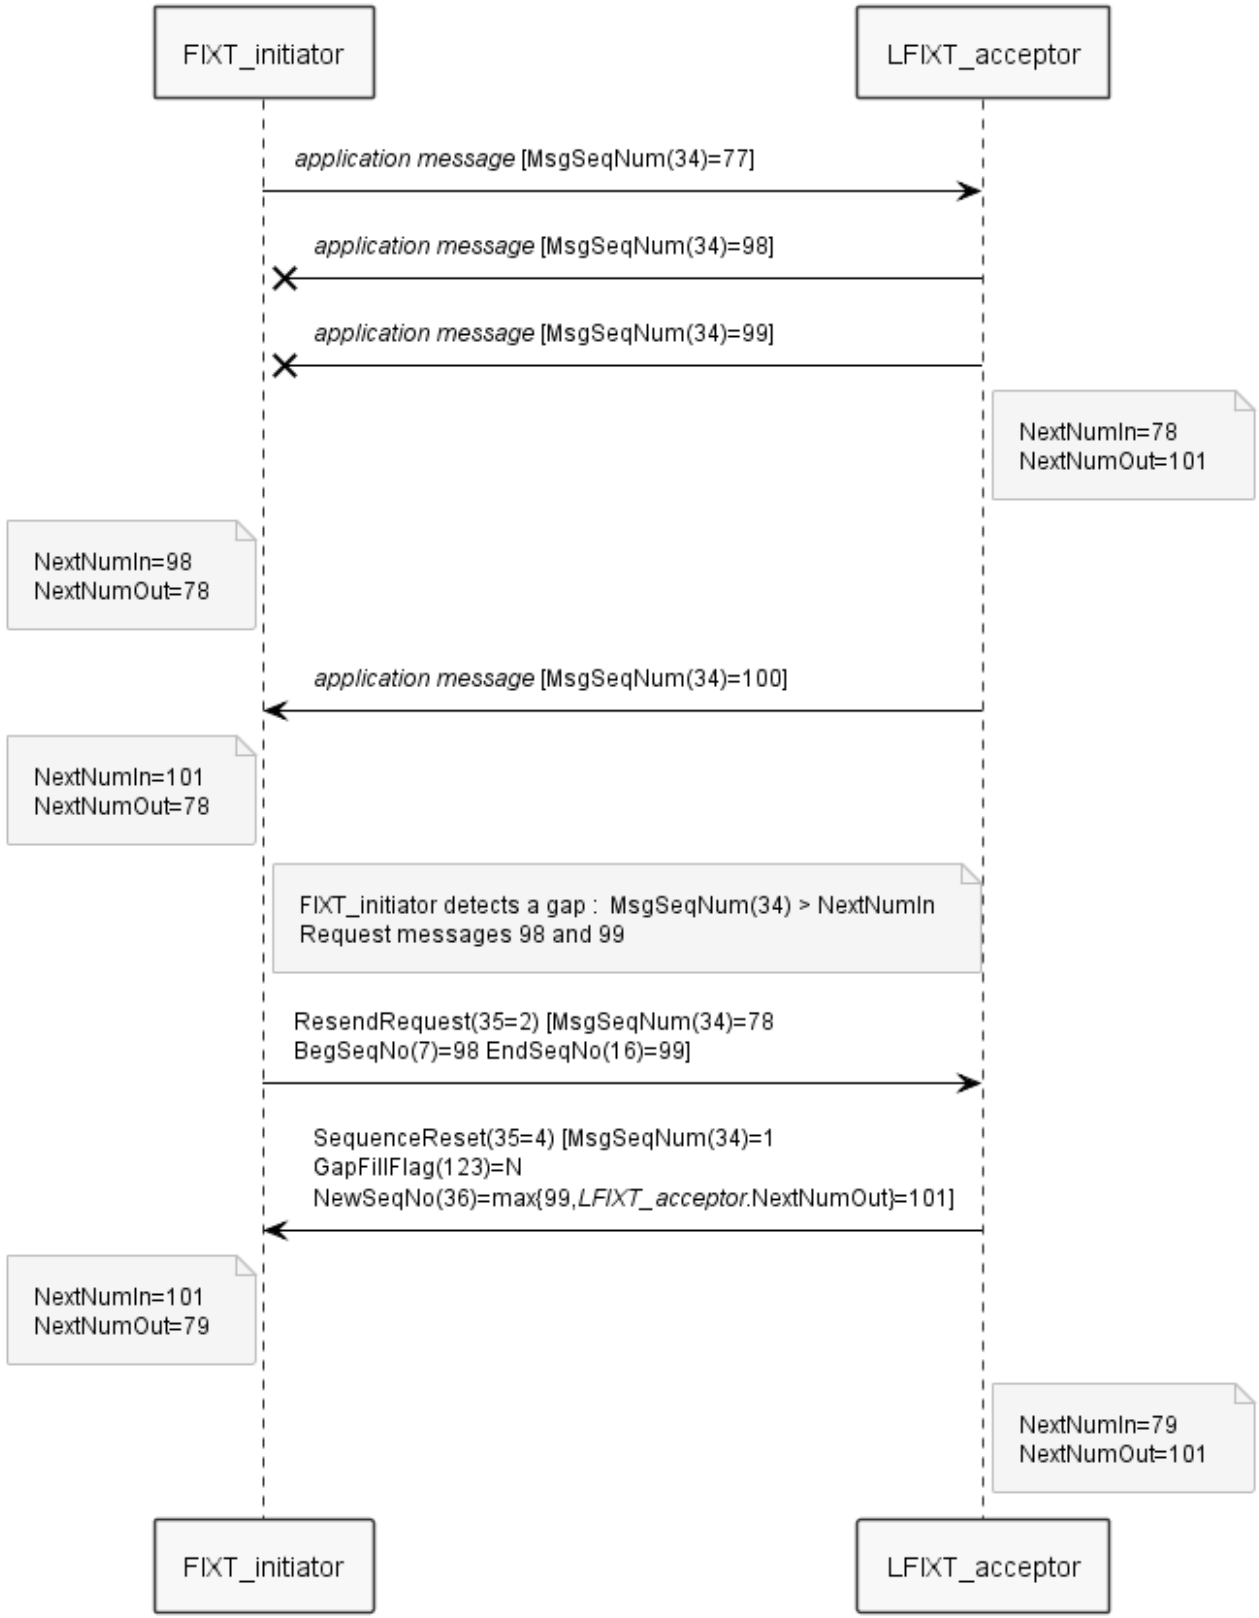

Figure 24 — LFIXT resetting sequence numbers in LFIXT compatible mode

© Copyright, 2011-2020, FIX Protocol, Limited

5.4.12 Processing invalid messages

If LFIXT encounters a garbled message or other data parsing issues, the LFIXT session processor should terminate the connection by sending a Logout(35=5) with a description of the error in Text(58) and terminate the transport layer connection.

© Copyright, 2011-2020, FIX Protocol, Limited

6 FIX message routing

6.1 Message routing details – one firm-to-one firm (point-to-point)

The following table provides examples regarding the use of SenderCompID(49), TargetCompID(56), DeliverToCompID(128), and OnBehalfOfCompID(115) when using a single point-to-point FIX session between two firms. Assumption (A=sell-side, B =buy-side):

Table 12 — Message routing example, single session between two firms

	SenderCompID	OnBehalfOfCompID	TargetCompID	DeliverToCompID
A to B directly	A		B	
B to A directly	B		A	

6.2 Message routing details – third party message routing

The FIX session protocol supports the ability for a single FIX session to represent multiple counterparties. This can be in a 1-to-many, many-to-1, or 1-to-1 fashion. In addition, some third parties may be connected to other third parties effectively forming a “chain” of “hops” between the original message initiator and the final message receiver. The SenderCompID(49), OnBehalfOfCompID(115), TargetCompID(56), and DeliverToCompID(128) fields are used for routing purposes.

When a message travels over intermediary FIX sessions or an intermediary sends a message on behalf of another firm (using OnBehalfOfCompID(115)), that intermediary may add their details to the HopGrp component. The HopGrp may be used to build a “history” of FIX sessions through which the original message was transmitted. The HopGrp is not used to facilitate routing, rather it provides an audit trail of intermediary FIX sessions involved in transmitting the message to its final destination. An audit trail of intermediary involvement may be a requirement of some regulatory bodies or counterparties. When an intermediary FIX session forwards a message on to the next hop (may be the end point or another intermediary), that intermediary may add its hop details to the HopGrp (i.e. its SenderCompID(49) as HopCompID(628), its SendingTime(52) as HopSendingTime(629), and the received message’s MsgSeqNum(34) or some other reference as HopRefID(630)).

Note that if OnBehalfOfCompID(115) or DeliverToCompID(128) message source identification/routing is used for a FIX session, then it must be used on all application messages transmitted via that session accordingly (reject the message if not).

The following figure provides examples regarding the use of SenderCompID(49), TargetCompID(56), DeliverToCompID(128), and OnBehalfOfCompID(115) when using a single FIX session to represent multiple firms. Assumptions are that A=sell-side, B=buy-side, and Hub=third party:

© Copyright, 2011-2020, FIX Protocol, Limited

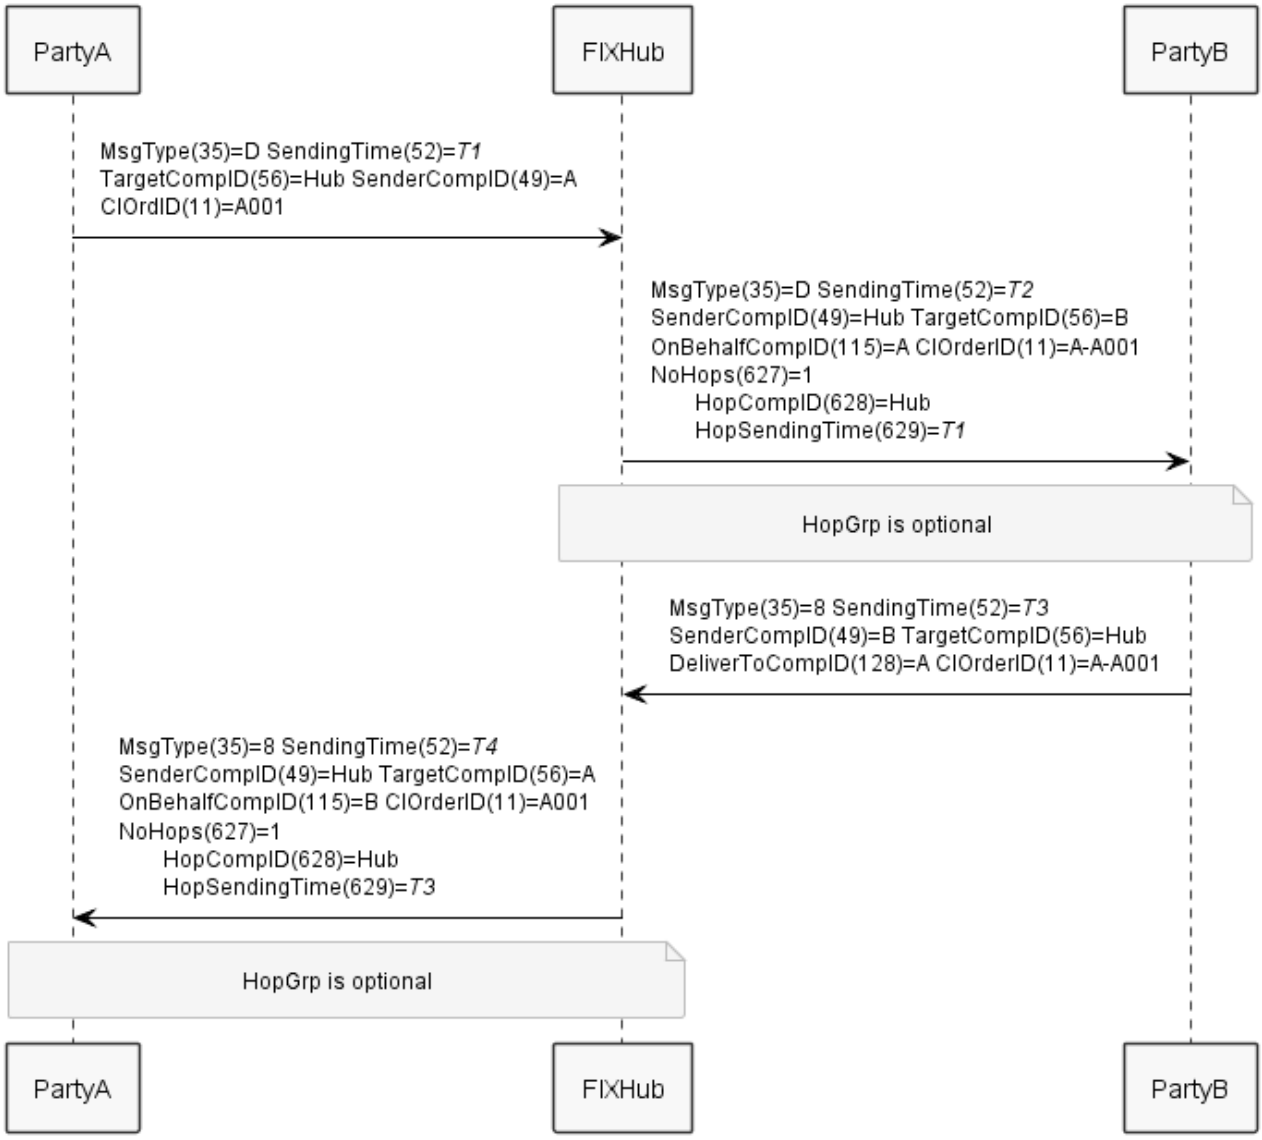

Figure 25 — Message routing example, single session between multiple firms

Note that some fields—for example, ClOrdID(11) on a NewOrderSingle(35=D) message—must be unique for all orders on a given FIX session. Thus, when using OnBehalfOfCompID(115) or DeliverToCompID(128) addressing, a recommended approach is to prepend these fields to the original value. For example, if A sends the hub a ClOrdID(11) value of “A001”, then the hub could specify a ClOrdID(11) of “A-A001” when sending the message to B to ensure uniqueness.

© Copyright, 2011-2020, FIX Protocol, Limited

7 Transmitting alternatively encoded messages over a FIX session

XML content may be transmitted over a FIX session layer. FIXML or other XML-based content (such as ISO 20022 XML messages, FpML XML messages) within the XmlData(213) field in the StandardHeader of the XMLnonFIX(35=n) message.

The application message type is assumed to be contained in the XML document sent in XmlData(213) and is not processed by the FIX session layer.

7.1 Use of Attachment group

Other encodings, such as SBE, JSON, Google Protocol Buffers, PDF, jpeg should be transmitted using the AttachmentGrp component within the XMLnonFIX(35=n) message.[14]

The AttachmentGrp component provides the ability to attach other media type documents to a FIX message for transmission. The media type can be any of the media types (previously referred to as MIME types) that are listed by IANA RFC2046.

[14] AttachmentGrp component added in EP167

© Copyright, 2011-2020, FIX Protocol, Limited

8 Components

8.1 AttachmentGrp

The AttachmentGrp component provides the ability to attach other media type documents to a FIX message for transmission. The media type can be any of the media types (previously referred to as MIME types) that are listed by IANA RFC2046. The AttachmentGrp is intended to be used to attach documents or payloads in other encodings, such as XML, JSON, TTL, SBE, GPB, PDF, TIFF, jpg to a FIX message. Note when the AttachmentGrp is used within a application message, such as the TradeCaptureReport(35=AE), the attachment should supplement the data already contained in the application message. It is not intended to replace the content of the business message. The standard fields within the application message should be populated, even if they duplicate data expressed within the attachment(s).

Tag	Name	Req'd	Description
2104	NoAttachments		
→2105	AttachmentName	N	Required if NoAttachments(2104) > 0. Specifies the file name of the attachment.
→2106	AttachmentMediaType	N	Required if EncodedAttachment(2112) is present. The MIME media type (and optional subtype) of the attachment. The values used are those assigned, listed and maintained by IANA (www.iana.org) [RFC2046].
→2107	AttachmentClassification	N	Specifies semantically the type of the attached document from a business perspective. The default classification scheme reuses the FIX standard classification scheme of a high level section (pretrade, trade, posttrade, etc.) and a category, then a specific application or document type. The expression follows {“section/category/application type”}.
→2108	AttachmentExternalURL	N	Either AttachmentExternalURL(2108) or EncodedAttachment(2112) must be specified if NoAttachments(2104) > 0.
→2109	AttachmentEncodingType	N	The encoding type of the content provided in EncodedAttachment(2112). Required if EncodedAttachment(2112) is present.
→2110	UnencodedAttachmentLen	N	Unencoded content length in octets. Can be used to validate successful unencoding.
→2111	EncodedAttachmentLen	N	Length in octets of EncodedAttachment(2112). Must be set if EncodedAttachment(2112) is specified and must immediately precede it.
→2112	EncodedAttachment	N	The content of the attachment in the encoding format specified in the AttachmentEncodingType(2109) field. Either AttachmentExternalURL(2108) or EncodedAttachment(2112) must be specified if NoAttachments(2104) > 0.
→**Component**	**AttachmentKeywordGrp**	N	Optional list of keywords associated with the EncodedAttachment(2112).

© Copyright, 2011-2020, FIX Protocol, Limited

8.2 AttachmentKeywordGrp

The AttachmentKeywordGrp component provides a place to associate keywords with an attachment document to support the current approach of tagging to support metadata.

Tag	Name	Req'd	Description
2113	NoAttachmentKeywords		
→2114	AttachmentKeyword	N	Required if NoAttachmentKeywords(2113) > 0. Can be used to provide data or keyword tagging of the content in EncodedAttachment(2112).

8.3 HopGrp

The HopGrp is used to build a history of the various FIX sessions over which an application message was transmitted. The HopGrp is not used to facilitate message routing, rather it provides an audit trail of intermediary FIX sessions to the ultimate receiver of a message.

Tag	Name	Req'd	Description
627	NoHops		
→628	HopCompID	N	Assigned value used to identify the third party firm which delivered a specific message either from the firm which originated the message or from another third party (if multiple "hops" are performed). It is recommended that this value be the SenderCompID (49) of the third party.
→629	HopSendingTime	N	Time that HopCompID (628) sent the message. It is recommended that this value be the SendingTime (52) of the message sent by the third party.
→630	HopRefID	N	Reference identifier assigned by HopCompID(628) associated with the message sent. It is recommended that this value be the MsgSeqNum(34) of the message sent by the third party.

8.4 MsgTypeGrp

The MsgTypeGrp may be used to specify the application level messages supported by a peer over the FIX session.

Tag	Name	Req'd	Description
384	NoMsgTypes		
→372	RefMsgType	N	Specifies a specific, supported MsgType(35). Required if NoMsgTypes(384) is > 0. Should be specified from the point of view of the sender of the Logon(35=A) message.
→385	MsgDirection	N	Indicates direction (send vs. receive) of a supported MsgType(35). Required if NoMsgTypes(384) is > 0. Should be specified from the point of view of the sender of the Logon(35=A) message.
→1130	RefApplVerID	N	Specifies the service pack release being applied to an application message.
→1406	RefApplExtID	N	Specified the extension pack being applied to a message.
→1131	RefCstmApplVerID	N	Specifies a custom extension to a message being applied at the session level.
→1410	DefaultVerIndicator	N	Indicates that this Application Version (RefApplVerID(1130), RefApplExtID(1406),RefCstmApplVerID(1131)) is the default for the RefMsgType(372) field.

© Copyright, 2011-2020, FIX Protocol, Limited

8.5 StandardHeader

Tag	Name	Req'd	Description
8	BeginString	Y	FIX.4.2 | FIX.4.4 | FIXT.1.1 BeginString(8) must be the first field in the message.
9	BodyLength	Y	Message length, in octets. BodyLength(9) must be the second field in the message.
35	MsgType	Y	Defines message type. MsgType(35) must be the third field in the message.
1128	ApplVerID	N	**FIXT.1.1 ONLY** Indicates application version being used for a message instance. ApplVerID(1128) applies to a specific message occurrence.
1156	ApplExtID	N	**FIXT.1.1 ONLY** Indicates an extension pack number being used for a message instance The ApplExtID(1156) applies to a specific message occurrence.
1129	CstmApplVerID	N	**FIXT.1.1 ONLY** Identifies a custom (user specified) version for a message instance.
49	SenderCompID	Y	(Always unencrypted)
56	TargetCompID	Y	(Always unencrypted)
115	OnBehalfOfCompID	N	Trading partner company ID used when sending messages via a third party (Can be embedded within encrypted data section.)
128	DeliverToCompID	N	Trading partner company ID used when sending messages via a third party (Can be embedded within encrypted data section.)
90	SecureDataLen	N	Length field for SecureData(91). SecureDataLen(90) must be present and unencrypted if SecureData(91) is present in the message.
91	SecureData	N	Encrypted message content. Tag number, separator ("="), and delimiter (<SOH>) must be unencrypted. If present in the message, SecureData(91) must be immediately preceded by SecureDataLen(90). The use of SecureData(90) and its associated length field SecureDataLen(91) was deprecated as of the FIXT.1.1 session specification. Application layer encryption is still supported by counterparty agreement.
34	MsgSeqNum	Y	(Can be embedded within encrypted data section.)
50	SenderSubID	N	(Can be embedded within encrypted data section.)
142	SenderLocationID	N	Sender's LocationID (i.e. geographic location and/or desk) (Can be embedded within encrypted data section.)
57	TargetSubID	N	"ADMIN" reserved for administrative messages not intended for a specific user. (Can be embedded within encrypted data section.)
143	TargetLocationID	N	Trading partner LocationID (i.e. geographic location and/or desk) (Can be embedded within encrypted data section.)
116	OnBehalfOfSubID	N	Trading partner SubID used when delivering messages via a third party. (Can be embedded within encrypted data section.)
144	OnBehalfOfLocationID	N	Trading partner LocationID (i.e. geographic location and/or desk)

© Copyright, 2011-2020, FIX Protocol, Limited

Tag	Name	Req'd	Description
			used when delivering messages via a third party. (Can be embedded within encrypted data section.)
129	DeliverToSubID	N	Trading partner SubID used when delivering messages via a third party. (Can be embedded within encrypted data section.)
145	DeliverToLocationID	N	Trading partner LocationID (i.e. geographic location and/or desk) used when delivering messages via a third party. (Can be embedded within encrypted data section.)
43	PossDupFlag	N	Always required for retransmitted messages, whether prompted by the sending system or as the result of a resend request. (Can be embedded within encrypted data section.)
97	PossResend	N	Required when message may be duplicate of another message sent under a different sequence number. (Can be embedded within encrypted data section.)
52	SendingTime	Y	(Can be embedded within encrypted data section.)
122	OrigSendingTime	N	Required for message retransmitted as a result of a ResendRequest. If data is not available set to same value as SendingTime (Can be embedded within encrypted data section.)
212	XmlDataLen	N	Required when XmlData(231) is present. Length of the XmlData(231) field in octets.
213	XmlData	N	Can contain a XML formatted message block (e.g. FIXML, ISO20022, FpML).
347	MessageEncoding	N	Type of message encoding used for fields of datatype *data*, commonly referred to as encoded fields. MessageEncoding(347) must be present if any fields of datatype *data* are present in the message.
369	LastMsgSeqNumProcessed	N	The last MsgSeqNum(34) value received by the FIX session processor and processed by downstream application, such as trading system or order routing system. May be specified on every message sent. Useful for detecting a backlog with a counterparty.
Component	**HopGrp**	N	The HopGrp may be used to track the FIX sessions over which an application message has been sent.

8.6 StandardTrailer

Tag	Name	Req'd	Description
93	SignatureLength	N	Length field for Signature(89). SignatureLength(93) must be present and unencrypted if Signature(89) is present in the message. SignatureLength(93) must not be included as part of the encrypted content in SecureData(91).
89	Signature	N	If Signature(89) is present, it must be immediately preceded by SignatureLength(93). Signature(89) must not be included as part of the encrypted content in SecureData(91).
10	CheckSum	Y	Three-octet character representation of the modulo 256 checksum. Checksum(10) must be the last field in the message. The end of field delimiter (<SOH>) of Checksum(10) serves as the end of message delimiter.

© Copyright, 2011-2020, FIX Protocol, Limited

9 Messages

9.1 Heartbeat message

The Heartbeat(35=0) message is sent unilaterally to keep a FIX connection active during periods of inactivity and it is also sent as a response to a TestRequest(35=1) from a peer.

Tag	Name	Req'd	Description
Component	**StandardHeader**	Y	MsgType = 0 T
112	TestReqID	N	Required when the heartbeat is the result of a Test Request message.
Component	**StandardTrailer**	Y	

9.2 TestRequest message

The TestRequest(35=1) is used to force a response from the peer. A HeartBeat(35=0) with the TestReqID(112) set to the value from the TestRequest(35=1)

Tag	Name	Req'd	Description
Component	**StandardHeader**	Y	MsgType = 1
112	TestReqID	Y	An arbitrary identifier provided by the sender of the TestRequest(35=1) message this must be returned by the peer in a HeartBeat(35=0) message response to confirm viability of the FIX connection.
Component	**StandardTrailer**	Y	

9.3 ResendRequest message

The ResendRequest(35=2) is sent by the receiving application to initiate the retransmission of messages.

Tag	Name	Req'd	Description
Component	**StandardHeader**	Y	MsgType = 2
7	BeginSeqNo	Y	The sequence number of the first message that requires retransmission.
16	EndSeqNo	Y	The sequence number of the last message sequence number. “0” specifies retransmission of all messages since BeginSeqNo(7)
Component	**StandardTrailer**	Y	

9.4 Reject message

The Reject(35=3) message should be issued when a message is received but cannot be properly processed due to a session laver or tagvalue encoding violation.

Tag	Name	Req'd	Description
Component	**StandardHeader**	Y	MsgType = 3
45	RefSeqNum	Y	MsgSeqNum of rejected message
371	RefTagID	N	The tag number of the FIX field being referenced.

© Copyright, 2011-2020, FIX Protocol, Limited

Tag	Name	Req'd	Description
372	RefMsgType	N	The MsgType of the FIX message being referenced.
1130	RefApplVerID	N	Recommended when rejecting an application message that does not explicitly provide ApplVerID (1128) on the message being rejected. In this case the value from the DefaultApplVerID(1137) or the default value specified in the NoMsgTypes repeating group on the logon message should be provided.
1406	RefApplExtID	N	Recommended when rejecting an application message that does not explicitly provide ApplExtID(1156) on the rejected message. In this case the value from the DefaultApplExtID(1407) or the default value specified in the NoMsgTypes repeating group on the logon message should be provided.
1131	RefCstmApplVerID	N	Recommended when rejecting an application message that does not explicitly provide CstmApplVerID(1129) on the message being rejected. In this case the value from the DefaultCstmApplVerID(1408) or the default value specified in the NoMsgTypes repeating group on the logon message should be provided.
373	SessionRejectReason	N	Code to identify reason for a session-level Reject message.
58	Text	N	Where possible, message to explain reason for rejection
354	EncodedTextLen	N	Must be set if EncodedText field is specified and must immediately precede it.
355	EncodedText	N	Encoded (non-ASCII characters) representation of the Text field in the encoded format specified via the MessageEncoding field.
Component	**StandardTrailer**	Y	

9.5 SequenceReset message

The SequenceReset(35=4) message is used to gap fill over messages not being resent in response to a resend request or it can be used to reset the sequence number to a new value instead of resending messages.

Tag	Name	Req'd	Description
Component	**StandardHeader**	Y	MsgType = 4
123	GapFillFlag	N	When set to "Y" Indicates that the SequenceReset(35=4) message is replacing session layer or application messages which will not be resent thus filling gaps in the sequence number. When set to "N" indicates that the sequence number is being reset to a new value. Any messages with MsgSeqNum(34) less than NewSeqNo(36) will not be resent.
36	NewSeqNo	Y	The sequence number that the recipient should use to reset its NextNumIn.
1744	ApplLevelRecoveryIndicator	N	Indicates that some application level messages were not retransmitted due to a gap fill or sequence reset and application level recovery should be performed.
Component	**StandardTrailer**	Y	

© Copyright, 2011-2020, FIX Protocol, Limited

9.6 Logout message

The Logout(35=5) message initiates and also acknowledges the termination of a FIX connection

Tag	Name	Req'd	Description
Component	**StandardHeader**	Y	MsgType = 5
1409	SessionStatus	N	Session status at time of logout.
789	NextExpectedMsgSeqNum	N	May be used to provide the expected MsgSeqNum in case of an error involving session synchronization. As this is an extended feature, must be used by counterparty agreement.
58	Text	N	Should be populated with diagnostic or error messages if the Logon(35=5) is being sent due to an issue encountered in the FIX connection.
354	EncodedTextLen	N	Must be present and set the number of octets in EncodedText(355) when EncodedText(355) is present. EncodedTextLen(354) must immediately precede EncodedText(355) it in the message.
355	EncodedText	N	Encoded representation of the contents of Text(58) field.
Component	**StandardTrailer**	Y	

9.7 Logon message

The Logon(35=A) message is used to initiate a FIX Connection and to acknowledge the initiation of a FIX Connection.

Tag	Name	Req'd	Description
Component	**StandardHeader**	Y	MsgType = A
98	EncryptMethod	Y	This field should always be unencrypted. The use of application level encryption was deprecated in favor of telecommunications link encryption. This field is still required to be present in the Logon(35=A) message but should normally be set to “0” (None). (Always unencrypted)
108	HeartBtInt	Y	Used to specify the heartbeat interval for the FIX connection in seconds.
95	RawDataLength	N	Must be present and set to the number of octets in RawData(96) when RawData(96) is present. Must immediately precede RawData(96) in the message.
96	RawData	N	Provided to support authentication methods in order to tunnel credentials via the session layer to the counterparty.
141	ResetSeqNumFlag	N	Indicates both sides of a FIX session should reset their NextNunIn and NextNumOut values to 1 and start a new FIX session.
789	NextExpectedMsgSeqNum	N	Optional, alternative via counterparty bi-lateral agreement message gap detection and recovery approach (see “Logon Message NextExpectedMsgSeqNum Processing” section)
383	MaxMessageSize	N	Can be used to specify the maximum number of octets supported for messages received
Component	**MsgTypeGrp**	N	May be used to populate what messages are supported in the FIX session.

© Copyright, 2011-2020, FIX Protocol, Limited

Tag	Name	Req'd	Description
464	TestMessageIndicator	N	May be used to specify that this FIX session will be sending and receiving “test” vs. “production” messages. If the TestMessageIndicator(464) field is not present, the default is assumed to be “production”.
553	Username	N	May be used for clear text userid.
554	Password	N	May be used for clear text password. No longer recommended for use. Use EncryptedPassword(1402) instead.
925	NewPassword	N	Specifies a new clear text password. The new password is used for subsequent logons. No longer recommended for use. Use EncryptedNewPassword(1404) instead.
1400	EncryptedPasswordMethod	N	User specified encryption method that is used for the EncryptedPassword(1402) and EncryptedNewPassword(1404) fields.
1401	EncryptedPasswordLen	N	Must be present and contain the number of octets in EncryptedPassword(1402). Must immediately precede EncryptedPassword(1402)in the message.
1402	EncryptedPassword	N	May be used to transmit an encrypted password.
1403	EncryptedNewPasswordLen	N	Must be present and contain the number of octets in EncryptedNewPassword(1404). Must immediately precede EncryptedNewPassword(1404) in the message.
1404	EncryptedNewPassword	N	Encrypted new password- encrypted via the method specified in EncryptedPasswordMethod(1400).
1409	SessionStatus	N	Session status at time of logon. Field is intended to be used when the logon is sent as an acknowledgement from acceptor of the FIX session.
1137	DefaultApplVerID	Y	The default version of FIX messages used by the FIX application layer.
1407	DefaultApplExtID	N	The default extension pack number used by the FIX application layer.
1408	DefaultCstmApplVerID	N	The default custom application version used by the FIX application layer. May be used to specify a reference to the FIX Orchestra rules of engagement that defines the application layer.
1600	FIXEngineName	N	Name of product or system responsible for communicating FIX messages, such as a FIX Engine or FIX Gateway.
1601	FIXEngineVersion	N	The version of the product or system responsible for communicating FIX messages, such as a FIX Engine or FIX Gateway.
1602	FIXEngineVendor	N	The version of the product or system responsible for communicating FIX messages, such as a FIX Engine or FIX Gateway.
1603	ApplicationSystemName	N	Provides the name of the application system being used to create application level messages.
1604	ApplicationSystemVersion	N	Provides the version of the application system.
1605	ApplicationSystemVendor	N	Provides the vendor of the application system.

© Copyright, 2011-2020, FIX Protocol, Limited

Tag	Name	Req'd	Description
58	Text	N	Available to provide a response to logon when used as a logon acknowledgement from acceptor back to the logon initiator.
354	EncodedTextLen	N	Must be present and be set to the number of octets in EncodedText(355) when EncodedText(355) is present. Must immediately precede EncodedText(355) in the message.
355	EncodedText	N	Encoded representation of the Text field in the encoded format specified via the MessageEncoding(347) field. Must be immediately preceded by EncodedTextLen(354).
Component	**StandardTrailer**	Y	

9.8 XMLnonFIX message

Tag	Name	Req'd	Description
Component	**StandardHeader**	Y	XMLnonFIX(35=n) is used to transmit XML documents, such as FIXML, ISO 20022, or FpML over a FIX session layer
Component	**AttachmentGrp**	N	Recommended for use to include other encodings or content types. The AttachmentGrp can support multiple attachments and media types.
Component	**StandardTrailer**	Y	

© Copyright, 2011-2020, FIX Protocol, Limited

10 Fields

Tag	Name	Datatype	Description
7	BeginSeqNo	SeqNum	Message sequence number of first message in range to be retransmitted.
8	BeginString	String	Identifies beginning of a new FIX tagvalue encoded message. BeginString(8) contains the protocol versions for versions before FIX.4.4. FIX.4.4 and later BeginString(8) represents the FIX session profile.
9	BodyLength	Length	The message length must be specified in the BodyLength(9) field. The length must be calculated by counting the number of octets in the message following the end of field delimiter (<SOH>) of BodyLength(9), up to and including the end of field delimiter (<SOH>) of the field immediately preceding the CheckSum(10) field.
10	CheckSum	String	Three-octet character representation of the modulo 256 checksum. Checksum(10) must be the last field in the message. The end of field delimiter (<SOH>) of Checksum(10) serves as the end of message delimiter.
16	EndSeqNo	SeqNum	Message sequence number of last message in range to be retransmitted. If request is for a single message, then BeginSeqNo(7) = EndSeqNo(16). If request is for all messages subsequent to a particular message, EndSeqNo(16) = “0” (representing infinity).
34	MsgSeqNum	SeqNum	Message sequence number.
35	MsgType	MsgTypeCodeSet	Defines the message type. MsgType(35) is case sensitive.
36	NewSeqNo	SeqNum	New sequence number.
43	PossDupFlag	PossDupFlagCodeSet	Indicates possible retransmission of the message with the sequence number in the MsgSeqNum(34) field.
45	RefSeqNum	SeqNum	Reference message sequence number
49	SenderCompID	String	Assigned value used to identify peer sending message. SenderCompID(49) and TargetCompID(56) uniquely define a session.
50	SenderSubID	String	Assigned value used to identify specific message originator (desk, trader, etc.)
52	SendingTime	UTCTimestamp	Time of message transmission (always expressed in UTC (Universal Time Coordinated, also known as “GMT”)
56	TargetCompID	String	Assigned value used to identify peer receiving the message. SenderCompID(49) and TargetCompID(56) uniquely define a

© Copyright, 2011-2020, FIX Protocol, Limited

Tag	Name	Datatype	Description
			session.
57	TargetSubID	String	Assigned value used to identify specific individual or unit intended to receive message. “ADMIN” reserved for administrative messages not intended for a specific user.
58	Text	String	Free format text string often populated with error messages or warnings.
89	Signature	data	Electronic signature
90	SecureDataLen	Length	Length in octets of the SecreData(91) field.
91	SecureData	data	Encrypted message contents.
93	SignatureLength	Length	Number of octets in the Signature(89) field.
95	RawDataLength	Length	Number of octets in RawData(96).
96	RawData	data	Unformatted raw data, can include bitmaps, word processor documents, etc.
97	PossResend	PossResendCodeSet	Indicates that message contain information that may have been sent earlier under another sequence number.
98	EncryptMethod	EncryptMethodCodeSet	Method of encryption.
108	HeartBtInt	int	Heartbeat interval (seconds)
112	TestReqID	String	Identifier included in TestRequest(35=1) message to be returned by the peer in a Heartbeat(35=0) message as a response.
115	OnBehalfOfCompID	String	Assigned value used to identify firm originating message if the message was delivered by a third party i.e. the third party firm identifier would be delivered in the SenderCompID(49) field and the firm originating the message in this field.
116	OnBehalfOfSubID	String	Assigned value used to identify specific message originator (i.e. trader) if the message was delivered by a third party
122	OrigSendingTime	UTCTimestamp	Original time of message transmission (always expressed in UTC (Universal Time Coordinated, also known as “GMT”) when transmitting orders as the result of a resend request.
123	GapFillFlag	GapFillFlagCodeSet	When set to “Y” Indicates that the SequenceReset(35=4) message is replacing session layer or application messages which will not be resent thus filling gaps in the sequence number. When set to “N” indicates that the sequence number is being reset to a new value. Any messages with MsgSeqNum(34) less than NewSeqNo(36) will not be resent.

© Copyright, 2011-2020, FIX Protocol, Limited

Tag	Name	Datatype	Description
128	DeliverToCompID	String	Assigned value used to identify the firm targeted to receive the message if the message is delivered by a third party i.e. the third party firm identifier would be delivered in the TargetCompID (56) field and the ultimate receiver firm ID in this field.
129	DeliverToSubID	String	Assigned value used to identify specific message recipient (i.e. trader) if the message is delivered by a third party
141	ResetSeqNumFlag	ResetSeqNumFlagCodeSet	Indicates that both sides of the FIX session should reset sequence numbers.
142	SenderLocationID	String	Assigned value used to identify specific message originator's location (i.e. geographic location and/or desk, trader)
143	TargetLocationID	String	Assigned value used to identify specific message destination's location (i.e. geographic location and/or desk, trader)
144	OnBehalfOfLocationID	String	Assigned value used to identify specific message originator's location (i.e. geographic location and/or desk, trader) if the message was delivered by a third party
145	DeliverToLocationID	String	Assigned value used to identify specific message recipient's location (i.e. geographic location and/or desk, trader) if the message was delivered by a third party
212	XmlDataLen	Length	Length in octets of the XmlData(213) field.
213	XmlData	data	Actual XML document (e.g. FIXML, ISO 20022, FpML).
347	MessageEncoding	String	Type of message encoding used in a message's encoded fields. MessageEncoding(347) must be specified if any fields of datatype *data* are present in the message.
354	EncodedTextLen	Length	Length in octets of EncodedText(355).
355	EncodedText	data	Encoded representation of the Text(58) field in the encoded format specified via the MessageEncoding(347) field
369	LastMsgSeqNumProcessed	SeqNum	The last MsgSeqNum(34) value received by the FIX engine and processed by downstream application, such as trading engine or order routing system. Can be specified on every message sent. Useful for detecting a backlog with a counterparty.
371	RefTagID	int	The tag number of the FIX field being referenced.
372	RefMsgType	MsgTypeCodeSet	The MsgType(35) of the FIX message being referenced.

© Copyright, 2011-2020, FIX Protocol, Limited

Tag	Name	Datatype	Description
373	SessionRejectReason	SessionRejectReasonCodeSet	Code to identify reason for a session-level Reject message.
383	MaxMessageSize	Length	Maximum number of octets supported for a single message.
384	NoMsgTypes	NumInGroup	Number of MsgTypes(35) in repeating group.
385	MsgDirection	MsgDirectionCodeSet	Specifies the direction of the messsage.
464	TestMessageIndicator	TestMessageIndicatorCodeSet	Indicates whether or not this FIX Session is a “test” vs. “production” connection.
553	Username	String	Userid or username.
554	Password	String	Password or passphrase.
627	NoHops	NumInGroup	Number of HopCompID(628) entries in repeating group.
628	HopCompID	String	Assigned value used to identify the third party firm which delivered a specific message either from the firm which originated the message or from another third party (if multiple “hops” are performed). It is recommended that this value be the SenderCompID(49) of the third party. Applicable when messages are communicated/re-distributed via third parties which function as service bureaus or “hubs”. Only applicable if OnBehalfOfCompID(115) is being used.
629	HopSendingTime	UTCTimestamp	Time that HopCompID(628) sent the message. It is recommended that this value be the SendingTime (52) of the message sent by the third party. Applicable when messages are communicated/re-distributed via third parties which function as service bureaus or “hubs”. Only applicable if OnBehalfOfCompID(115) is being used.
630	HopRefID	SeqNum	Reference identifier assigned by HopCompID(628) associated with the message sent. It is recommended that this value be the MsgSeqNum(34) of the message sent by the third party. Applicable when messages are communicated/re-distributed via third parties which function as service bureaus or “hubs”. Only applicable if OnBehalfOfCompID(115) is being used.
789	NextExpectedMsgSeqNum	SeqNum	Next expected MsgSeqNum(34) value to be received.
925	NewPassword	String	New Password or passphrase.
1128	ApplVerID	ApplVerIDCodeSet	Specifies application version.

© Copyright, 2011-2020, FIX Protocol, Limited

Tag	Name	Datatype	Description
1129	CstmApplVerID	String	Custom application version for a FIX service offering.
1130	RefApplVerID	ApplVerIDCodeSet	The FIX application layer version.
1131	RefCstmApplVerID	String	Reference to a custom application version identifier associated with a message.
1137	DefaultApplVerID	ApplVerIDCodeSet	Specifies the FIX application version identifier. If DefaultApplVerID(1137) is not present, the default application level is assumed to be FIXLatest (value 10)
1156	ApplExtID	int	The extension pack number associated with an application message.
1400	EncryptedPasswordMethod	int	Enumeration defining the encryption method used to encrypt password fields. At this time there are no encryption methods defined by FIX within the FIX session layer.
1401	EncryptedPasswordLen	Length	Length in octets of the EncryptedPassword(1402) field.
1402	EncryptedPassword	data	Encrypted password - encrypted via the method specified in the field EncryptedPasswordMethod(1400)
1403	EncryptedNewPasswordLen	Length	Length of the EncryptedNewPassword(1404) field
1404	EncryptedNewPassword	data	Encrypted new password - encrypted via the method specified in the field EncryptedPasswordMethod(1400)
1406	RefApplExtID	int	The extension pack number associated with an application message.
1407	DefaultApplExtID	int	The extension pack number that is the default for a FIX session.
1408	DefaultCstmApplVerID	String	The default custom application version ID that is the default for a session.
1409	SessionStatus	SessionStatusCodeSet	Status of a FIX session
1410	DefaultVerIndicator	Boolean	
1600	FIXEngineName	String	Provides the name of the infrastructure component being used for session level communication. Normally this would be the FIX Engine or FIX Gateway product name.
1601	FIXEngineVersion	String	Provides the version of the infrastructure component.
1602	FIXEngineVendor	String	Provides the name of the vendor providing the infrastructure component.
1603	ApplicationSystemName	String	Provides the name of the application system being used to generate FIX application messages. This will normally be a trading

© Copyright, 2011-2020, FIX Protocol, Limited

Tag	Name	Datatype	Description
			system, OMS, or EMS.
1604	ApplicationSystemVersion	String	Provides the version of the application system being used to initiate FIX application messages.
1605	ApplicationSystemVendor	String	Provides the vendor of the application system.
1744	ApplLevelRecoveryIndicator	ApplLevelRecoveryIndicatorCodeSet	Indicates whether application level recovery is needed.
2104	NoAttachments	NumInGroup	The number of attached files.
2105	AttachmentName	String	Specifies the file name of the attachment.
2106	AttachmentMediaType	String	The MIME media type (and optional subtype) of the attachment. The values used are those assigned, listed and maintained by IANA (www.iana.org) [RFC2046]. See http://www.iana.org/assignments/media-types/index.html for available types. Examples values (RFC number provided for reference here only): “application/pdf” (see [RFC3778]) “application/msword” (for .doc files) “multipart/signed” (see [RFC1847]) “application/vnd.openxmlformats-officedocument.wordprocessingml.document” (for .docx files)
2107	AttachmentClassification	String	Specifies semantically the type of the attached document from a business perspective. The default classification scheme reuses the FIX standard classification scheme of a high level section (pretrade, trade, posttrade, etc.) and a category, then a specific application or document type. The expression follows {“section/category/application type”}. The goal here is to map the attachment into the sections and categories of the FIX business messages if possible. The classification scheme can be expanded or replaced by counterparty agreement. This approach permits the introduction and reference to other business ontologies. Example: posttrade/confirmation/confirm pretrade//termsheet
2108	AttachmentExternalURL	String	Used to specify an external URL where the attachment can be obtained.
2109	AttachmentEncodingType	AttachmentEncodingTypeCodeSet	The encoding type of the content provided in EncodedAttachment(2112).
2110	UnencodedAttachmentLen	int	Unencoded content length in octets. Can be used to validate successful decoding.

© Copyright, 2011-2020, FIX Protocol, Limited

Tag	Name	Datatype	Description
2111	EncodedAttachmentLen	Length	Byte length of encoded the EncodedAttachment(2112) field.
2112	EncodedAttachment	data	The content of the attachment in the encoding format specified in the AttachmentEncodingType(2109) field.
2113	NoAttachmentKeywords	NumInGroup	The number of attachment keywords.
2114	AttachmentKeyword	String	Can be used to provide data or keyword tagging of the content of the attachment.

© Copyright, 2011-2020, FIX Protocol, Limited

11 Code sets

11.1 ApplLevelRecoveryIndicatorCodeSet

Indicates whether application level recovery is needed.

Datatype int

ApplLevelRecoveryIndicatorCodeSet codes

Name	Value	Description
NoApplRecoveryNeeded	0	Application level recovery is not needed (default)
ApplRecoveryNeeded	1	Application level recovery is needed

11.2 ApplVerIDCodeSet

Specifies the service pack release being applied at message level. Enumerated field with values assigned at time of service pack release

Datatype String

ApplVerIDCodeSet codes

Name	Value	Description
FIX27	0	FIX27
FIX30	1	FIX30
FIX40	2	FIX40
FIX41	3	FIX41
FIX42	4	FIX42
FIX43	5	FIX43
FIX44	6	FIX44
FIX50	7	FIX50
FIX50SP1	8	FIX50SP1
FIX50SP2	9	FIX50SP2
FIXLatest	10	FIXLatest

11.3 AttachmentEncodingTypeCodeSet

The encoding type of the content provided in EncodedAttachment(2112).

Datatype int

AttachmentEncodingTypeCodeSet codes

Name	Value	Description
Base64	0	Base64 encoding Base64 Encoding.
RawBinary	1	Unencoded binary content Unencoded binary content.

© Copyright, 2011-2020, FIX Protocol, Limited

11.4 EncryptMethodCodeSet

Method of encryption.

Datatype int

EncryptMethodCodeSet codes

Name	Value	Description
None	0	None
PKCS	1	PKCS (Proprietary)
DES	2	DES (ECB Mode)
PKCSDES	3	PKCS / DES (Proprietary)
PGPDES	4	PGP / DES (Defunct)
PGPDESMD5	5	PGP / DES-MD5 (See app note on FIX web site)
PEM	6	PEM / DES-MD5 (see app note on FIX web site)

11.5 GapFillFlagCodeSet

Indicates that the SequenceReset(35=4) message is replacing session layer or application messages which will not be resent.

Datatype Boolean

GapFillFlagCodeSet codes

Name	Value	Description
SequenceReset	N	Sequence Reset, Ignore MsgSeqNum(34)
GapFillMessage	Y	Gap Fill Message, MsgSeqNum(34) valid and is replacing previously transmitted message.

11.6 MsgDirectionCodeSet

Specifies the direction of the messsage.

Datatype char

MsgDirectionCodeSet codes

Name	Value	Description
Receive	R	Receive
Send	S	Send

11.7 MsgTypeCodeSet

Message types for session level messages. Case sensitive alphanumeric character string. A “U” as the first character in the MsgType field (i.e. U, U2, etc) indicates that the message format is privately defined between the sender and receiver.

Datatype String

MsgTypeCodeSet codes

Name	Value	Description
Heartbeat	0	Heartbeat Message

© Copyright, 2011-2020, FIX Protocol, Limited

Name	Value	Description
TestRequest	1	TestRequest Message
ResendRequest	2	ResendRequest Message
Reject	3	Reject Message
SequenceReset	4	SequenceReset Message
Logout	5	Logout Message
Logon	A	Logon Message
BusinessMessageReject	j	BusinessMessageReject Message
XMLnonFIX	n	XMLnonFIX Message

11.8 PossDupFlagCodeSet

Indicates possible retransmission of message with this sequence number

Datatype Boolean

PossDupFlagCodeSet codes

Name	Value	Description
OriginalTransmission	N	Original transmission
PossibleDuplicate	Y	Possible duplicate

11.9 PossResendCodeSet

Indicates that message may contain information that has been sent under another sequence number.

Datatype Boolean

PossResendCodeSet codes

Name	Value	Description
OriginalTransmission	N	Original Transmission
PossibleResend	Y	Possible Resend

11.10 ResetSeqNumFlagCodeSet

Indicates that both sides of the FIX session should reset sequence numbers, effectivelycausing a new FIX session.

Datatype Boolean

ResetSeqNumFlagCodeSet codes

Name	Value	Description
No	N	No
Yes	Y	Yes, reset sequence numbers

11.11 SessionRejectReasonCodeSet

Code to identify reason for a session-level Reject message.

Datatype int

© Copyright, 2011-2020, FIX Protocol, Limited

SessionRejectReasonCodeSet codes

Name	Value	Description
InvalidTagNumber	0	Invalid Tag Number
RequiredTagMissing	1	Required Tag Missing
TagNotDefinedForThisMessageType	2	Tag not defined for this message type
UndefinedTag	3	Undefined tag
TagSpecifiedWithoutAValue	4	Tag specified without a value
ValueIsIncorrect	5	Value is incorrect (out of range) for this tag
IncorrectDataFormatForValue	6	Incorrect data format for value
DecryptionProblem	7	Decryption problem
SignatureProblem	8	Signature problem
CompIDProblem	9	CompID problem
SendingTimeAccuracyProblem	10	SendingTime Accuracy Problem
InvalidMsgType	11	Invalid MsgType
XMLValidationError	12	XML Validation Error
TagAppearsMoreThanOnce	13	Tag appears more than once
TagSpecifiedOutOfRequiredOrder	14	Tag specified out of required order
RepeatingGroupFieldsOutOfOrder	15	Repeating group fields out of order
IncorrectNumInGroupCountForRepeatingGroup	16	Incorrect NumInGroup count for repeating group
FieldDelimiterInFieldValue	17	Field value contains the field delimiter, the <SOH> character.
InvalidUnsupportedAppVersion	18	Invalid or unsupported Application Version
Other	99	Other

11.12 SessionStatusCodeSet

Status of a FIX session

Datatype int

SessionStatusCodeSet codes

Name	Value	Description
SessionActive	0	Session active
SessionPasswordChanged	1	Session password changed
SessionPasswordDueToExpire	2	Session password due to expire
NewSessionPasswordDoesNotComplyWithPolicy	3	New session password does not comply with policy
SessionLogoutComplete	4	Session logout complete
InvalidUsernameOrPassword	5	Invalid username or password
AccountLocked	6	Account locked
LogonsAreNotAllowedAtThisTime	7	Logons are not allowed at this time

© Copyright, 2011-2020, FIX Protocol, Limited

Name	Value	Description
PasswordExpired	8	Password expired
ReceivedMsgSeqNumTooLow	9	Received MsgSeqNum(34) is too low.
ReceivedNextExpectedMsgSeqNumTooHigh	10	Received NextExpectedMsgSeqNum(789) is too high.

11.13 TestMessageIndicatorCodeSet

Indicates if the FIX Session is intended to be test or production.

Datatype Boolean

TestMessageIndicatorCodeSet codes

Name	Value	Description
False	N	False (production)
True	Y	True (test)

© Copyright, 2011-2020, FIX Protocol, Limited

Bibliography

[1] Financial Information eXchange – FIX Session Layer Test Cases

[2] Light-weight FIX Session Layer Protocol (draft)

[3] FIX 4.2 Specification with 20010501 Errata https://www.fixtrading.org/standards/fix-4-2/

[4] FIX 4.4 Specification with 20030618 Errata https://www.fixtrading.org/standards/fix-4-4/

[5] FIX 5.0 Specification Service Pack 2 with 20131209 Errata https://www.fixtrading.org/standards/fix-5-0-sp-2/

[6] FpML 5.11 Recommendation https://www.fpml.org/spec/fpml-5-11-8-rec-1/

[7] FIX Orchestra Technical Specification Draft Standard v1.0 https://www.fixtrading.org/packages/fix-orchestra-technical-specification-draft-standard-v1-0/

[8] ISO 20022-1:2013 *Financial services — Universal financial industry message scheme — Part 1: Metamodel*

[9] ISO 20022-2:2013 *Financial services — Universal financial industry message scheme — Part 2: UML profile*

[10] ISO 20022-3:2013 *Financial services — Universal financial industry message scheme — Part 3: Modelling*

[11] ISO 20022-4:2013 *Financial services — Universal financial industry message scheme — Part 4: XML Schema generation*

[12] ISO 20022-5:2013 *Financial services — Universal financial industry message scheme — Part 5: Reverse engineering*

[13] ISO 20022-6:2013 *Financial services — Universal financial industry message scheme — Part 6: Message transport characteristics*

[14] ISO 20022-7:2013 *Financial services — Universal financial industry message scheme — Part 7: Registration*

[15] ISO 20022-8:2013 *Financial services — Universal financial industry message scheme — Part 8: ASN.1 generation*

[16] ISO/IEC 7498-1:1994 *Information technology – Open Systems Interconnection – Basic Reference Model: The Basic Model*

[17] ISO 7498-2:1989 *Information processing systems – Open Systems Interconnection – Basic Reference Model – Part 2: Security Architecture*

[18] Hohpe, Gregor, and Bobby Woolf. *Enterprise Integration Patterns: Designing, Building, and Deploying Messaging Solutions.* Boston: Addison-Wesley, 2003.

[19] Hohpe, Gregor. Durable Subscriber. *Enterprise Integration Patterns.* https://www.enterpriseintegrationpatterns.com/patterns/messaging/DurableSubscription.html

[20] Hohpe, Gregor. Guaranteed Delivery. *Enterprise Integration Patterns.* https://www.enterpriseintegrationpatterns.com/patterns/messaging/GuaranteedMessaging.html

Unsupported FIX application versions:

[21] FIX 4.3 Specifications https://www.fixtrading.org/standards/unsupported/fix-4-3/

[22] FIX 5.0 Specifications https://www.fixtrading.org/standards/unsupported/fix-5-0/

[23] FIX 5.0 SP1 Specifications https://www.fixtrading.org/standards/unsupported/fix-5-0-sp1/

© Copyright, 2011-2020, FIX Protocol, Limited